


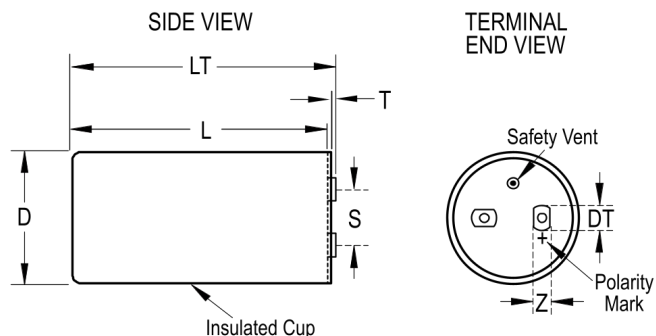

Click [here](#) for the 3D model.

### Dimensions

|    |               |
|----|---------------|
| D  | 51.6mm +/-1mm |
| L  | 74.5mm +/-1mm |
| T  | 4.9mm NOM     |
| S  | 22mm          |
| F  | 15mm +/-0.5mm |
| DT | 15mm NOM      |
| G  | 13mm NOM      |
| LT | 82.4mm +/-1mm |
| Z  | 13mm NOM      |

### Packaging Specifications

|                    |           |
|--------------------|-----------|
| Sleeving           | Yes       |
| Packaging          | Bulk, Bag |
| Packaging Quantity | 20        |

### General Information

|                  |                                                         |
|------------------|---------------------------------------------------------|
| Series           | PEH200                                                  |
| Dielectric       | Aluminum Electrolytic                                   |
| Description      | Screw Terminal, Aluminum Electrolytic                   |
| RoHS             | Yes                                                     |
| AEC-Q200         | No                                                      |
| Halogen Free     | Yes                                                     |
| Component Weight | 180 g                                                   |
| Notes            | Dimensions D And L Include Sleeving. MS (MxS) = M12x16. |
| Shelf Life       | 156 Weeks                                               |

### Specifications

|                       |                                                                    |
|-----------------------|--------------------------------------------------------------------|
| Capacitance           | 470 uF                                                             |
| Capacitance Tolerance | 20%                                                                |
| Voltage DC            | 450 VDC                                                            |
| Temperature Range     | -40/+85°C                                                          |
| Rated Temperature     | 85°C                                                               |
| Life                  | 12000 Hrs (Rated Voltage And Ripple Current At 85°C)               |
| Resistance            | 120 mOhms (100Hz 20C), 58 mOhms (100kHz 20C)                       |
| Ripple Current        | 4.5 Amps (100Hz 85C), 25.5 Amps (10kHz 50C), 17.5 Amps (10kHz 40C) |
| Leakage Current       | 4634.5 uA (5min 20°C)                                              |
| Inductance            | 16 nH (ESL)                                                        |