

Note: This datasheet may be out of date. Please download the latest datasheet of CSTNE17M0V53L000R0 from the official website of Murata

Manufacturing Co., Ltd.

CSTNE17M0V53L000R0












Appearance & Shape

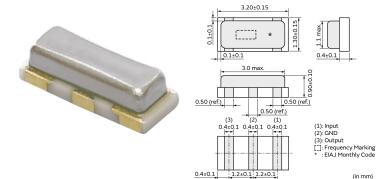



Features

http://www.murata.com/en-gb/products/productdetail?partno=CSTNE17M0V53L000R0

MURATA's package technology expertise has enabled the development of the Chip CERALOCK(R) with built-in load capacitors.

High-density mounting is made possible by the small package and the elimination of the need for an external load capacitor.

Features

- 1. Oscillation circuits do not require external load capacitors.
- 2. Available for a wide frequency range.
- 3. Extremely small and have a low profile.
- 4. No adjustment is necessary for oscillation circuits.
- 5. Available for a wide temperature range.
- 6. Stable supply is ensured due to not using precious metal(Palladium).



Applications

Other Usage	Consumer/Industrial
-------------	---------------------



Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape	3000

1 of 2

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





Product Search Data Sheet

Note: This datasheet may be out of date. $Please\ download\ the\ latest\ data sheet\ of\ CSTNE17M0V53L000R0\ from\ the\ official\ website\ of\ Murata$ Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=CSTNE17M0V53L000R0

CSTNE17M0V53L000R0



Specifications

Due don't Time	Ceramic Resonator	
Product Type	(CERALOCK)	
Series	CSTNE_V_L	
Frequency	17.000MHz	
Frequency Tolerance	+/-0.50% max.	
Operating Temperature Range	-40°C~85°C	
Frequency Shift by		
Temperature	+/-0.20% max.	
Temperature		
Frequency Aging	+/-0.20% max.	
Resonant Impedance (R1)	40ohm max.	
Built-in Load Capacitance	15pF	
(CL1/CL2)	Ιορε	
Shape	SMD	
Wash	Not available	
L x W (size)	3.2x1.3mm	
Mass	12.56mg	

2 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

