External / In-building Knuckle Swivel, WiFi 6E Stick Antenna









- WiFi-6E, Zigbee, BLE/BT, DSRC V2x Communication
- Rugged Outdoor Systems
- @ Marine, Mining, Utility, Oil/Gas Environments
- Industrial Applications
- Metering, Security, IoT Applications
- Outdoor Networking, Data Transmission, Access Points

Electrical Specifications @ 25C – Operating Temperature –40C to 85C, Storage Temperature –40C to 85C											
Frequency Bands: 2.4-2.5GHz, 5.15-7.125GHz											
Antenna Type	Nominal Impedance	Radiation Pattern	Pol	arization	VSWR						
Stick Antenna	50Ω	Omni	V	ertical	2.0 Max						
Fi	requency	2.4-2.5GHz		5.15-7.125GHz							
Avera	ge Efficiency	75%		71%							
P	eak Gain	3.5dBi		3.8dBi							


Mechanical Specifications											
Part Number	Length	Color	Weight	Connector Type	Plastic Radome	Flammability	Ingress Protection				
W5098	5.92 Inches	Black	17.3grms	RP-SMA	TPEE	UL94-V0	IP67				


External / In-building Knuckle Swivel, WiFi 6E Stick Antenna



Mechanical

W5098

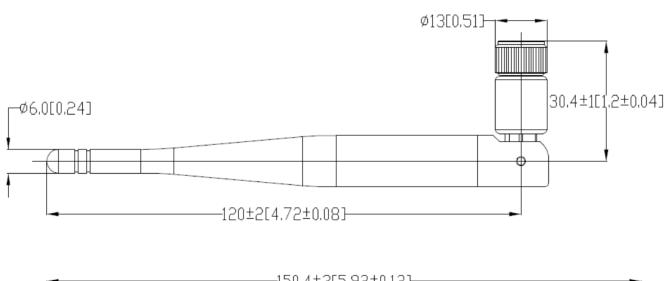



Packaging

W5098


10PCS/Bullet PE bag 500PCS/Carton Box



Charts


W5029x

VSWR measured in free space

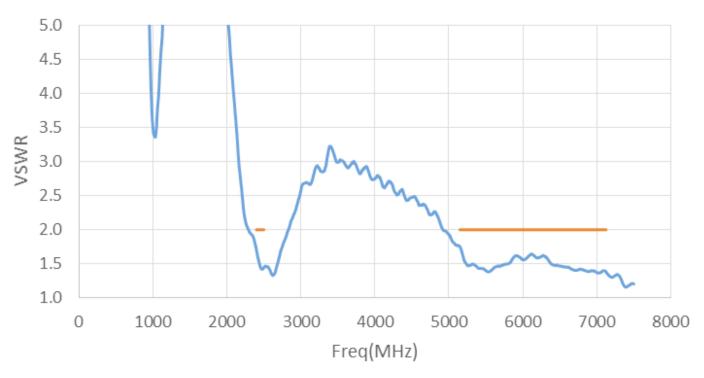


Chamber set up

3

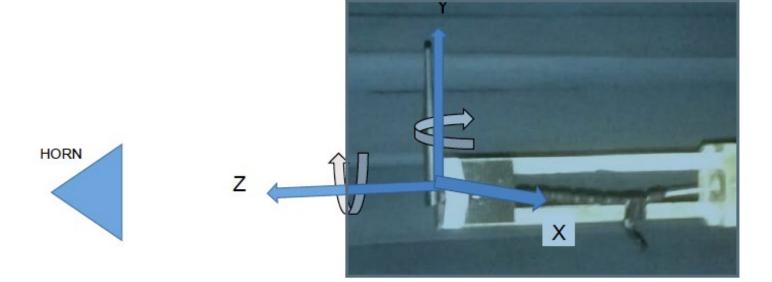




Effciency measured in free space right angle

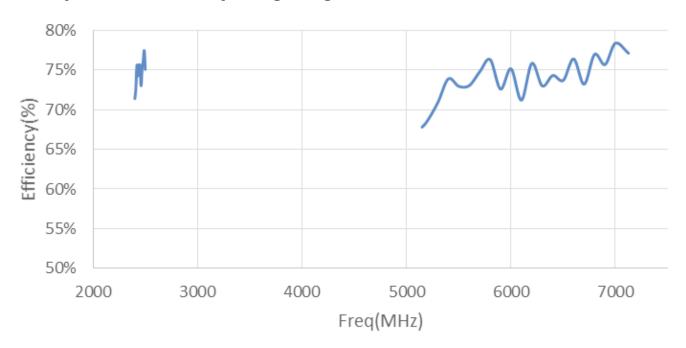


Peak Gain measured in free space right angle

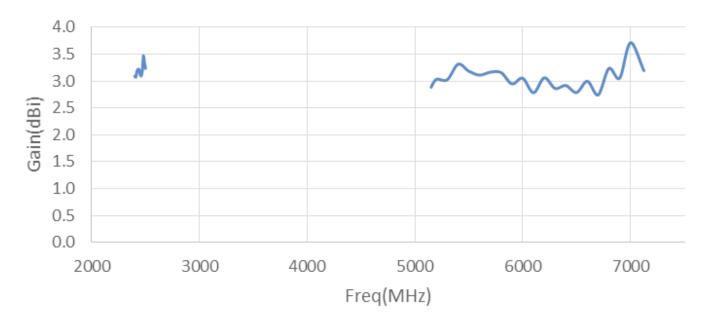






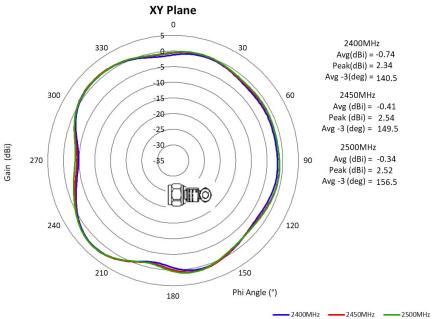


Vertical Plane

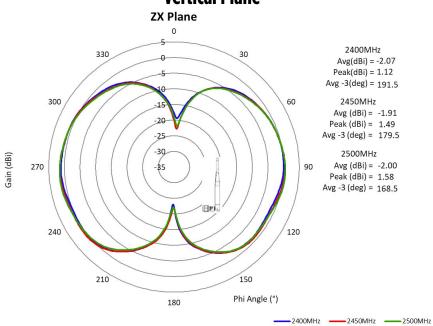


External / In-building Knuckle Swivel, WiFi 6E Stick Antenna



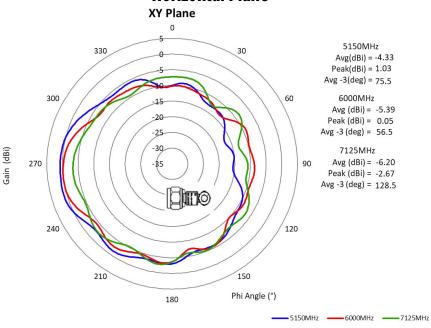

Vertical Plane

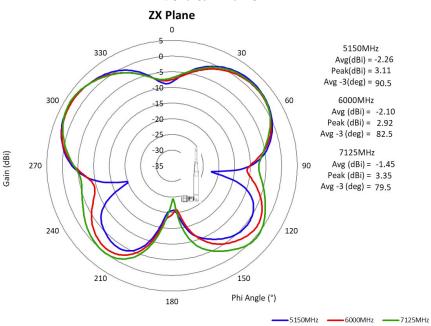

For More Information:

Americas - antennas.us@pulseelectronics.com | Europe - antennas.eu@pulseelectronics.com | Asia - antennas.as@pulseelectronics.com | Questions? +1-800-ANTENNA

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. Pulse Electronics, Inc. All rights reserved.

