
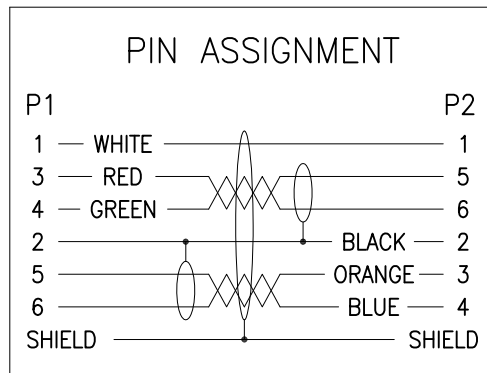


REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1998	A	RELEASED	JN	06/15/09	JWM	06/15/09	JWM	06/15/09

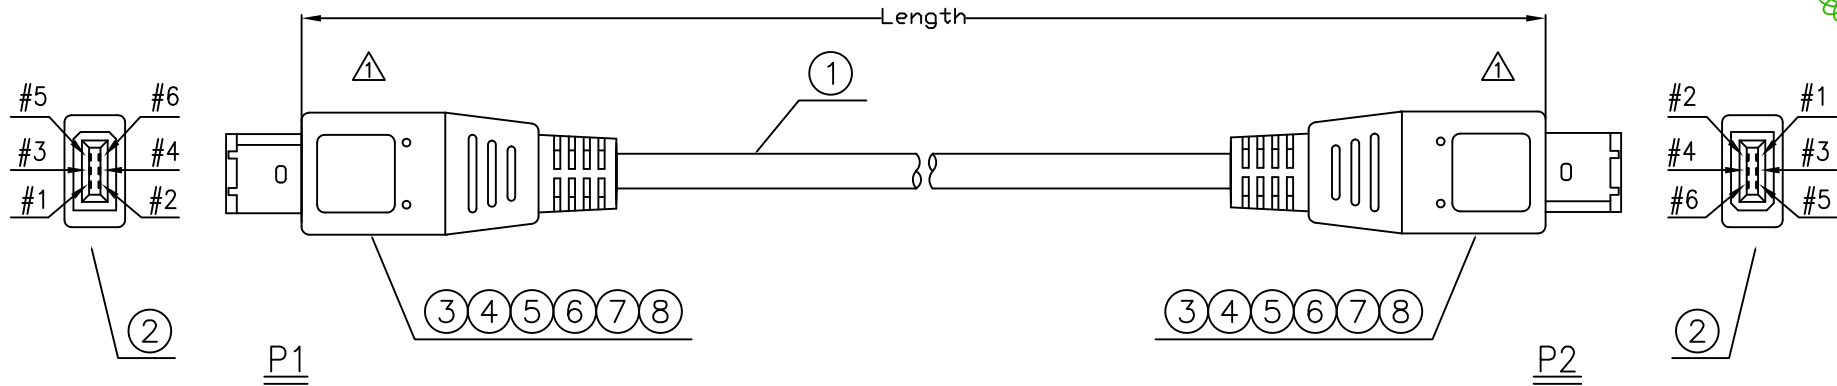

P/N	LENGTH (mm)
SPC20019	72±1 [1830±50]
SPC20017	120±2 [3050±50]
SPC20018	180±2 [4575±50]

**NOTES:**

- CABLE: [28AWG(7/0.127)\*1P+AL/MY+BD(16/5/0.10)]  
 \*2C+22AWG(7/0.254)\*2C+MY+AL/MY+85%BD(24/5/0.12/)}TIN  
 INSULATION WIRE: FO-PE, OD=ø1.05±0.05MM(28#)  
 SR-PVC, OD=ø1.35±0.07mm(22#)  
 COLOR: RED&GREEN BLUE&ORANGE(28#) WHITE, BLACK(22#)  
 JACKET: 80°C PVC, OD=ø6.1±0.20MM  
 COLOR: PLATINUM GRAY
- PVC: PLATINUM GRAY
- CONNECTOR: 1394 6P MALE NICKEL-PLATING INSULATOR COLOR: BLACK

NO.	DESCRIPTION
8	PVC-GY22/50
7	HI TEAMP TAPE: W: 8MM
6	HI-TEAMP-TAPE W: 6MM
5	TUBE-HT-ø1.0MM
4	FOIL-AL-6MM
3	SOL-WIRE-FULL TIN-1.0
2	IE1394-6P<BK>, NICKEL-PLATED
1	[(28#*1P+A+B)*2+22#*2C]+MYLAR+A+B-GY22-6.0U20276

DISCLAIMER:  
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

**TOLERANCES:**  
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

<b>DRAWN BY:</b>	<b>DATE:</b>
Jason Nash	06/15/09
<b>CHECKED BY:</b>	<b>DATE:</b>
Jeff McVicker	06/15/09
<b>APPROVED BY:</b>	<b>DATE:</b>
Jeff McVicker	06/15/09

<b>DRAWING TITLE:</b> Firewire Cable, Host-Host, 6 pin Male - 6 pin Male			
<b>SIZE</b>	<b>DWG. NO.</b>	<b>ELECTRONIC FILE</b>	<b>REV</b>
A	Ta-741	Ta-741.dwg	A
<b>SCALE:</b> NTS	<b>U.O.M.:</b> Millimeters	<b>SHEET:</b> 1 OF 1	