


AMPSEAL 16

TE Internal #: 2355843-1 Data Connectivity Housings, Housing for Female Terminals, A, Cable-to-Cable, 1 Position, Sealable, Shielded, Cable Exit Angle 180°, Crimp, AMPSEAL 16

View on TE.com >



Connectors > Automotive Connectors > Data Connectivity Systems > Data Connectivity Housings

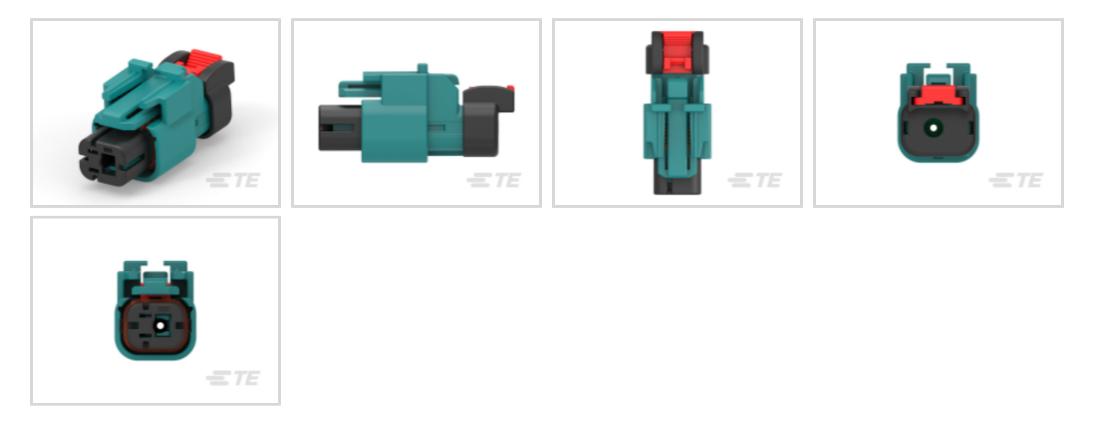

Connector & Housing Type: Housing for Female Terminals

Connector & Keying Code: A

Connector System: Cable-to-Cable

Number of Positions: 1

Sealable: Yes

Features

Product Type Features

Connector & Housing Type	Housing for Female Terminals		
Connector System	Cable-to-Cable		
Sealable	Yes		
Connector & Contact Terminates To	Wire & Cable		
Configuration Features			
Number of Positions	1		
Electrical Characteristics			
Impedance	50 Ω		
Body Features			
Body Material	PAGF		
Connector & Keying Code	A		
Cable Exit Angle	180°		
Termination Features			

Data Connectivity Housings, Housing for Female Terminals, A, Cable-to-Cable, 1 Position, Sealable, Shielded, Cable Exit Angle 180°, Crimp, AMPSEAL 16



Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Usage Conditions	
Operating Temperature (Max)	105 °C[221 °F]
Cable Type	Соах
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Operation/Application	
Shielded	Yes
Circuit Application	Signal
Packaging Features	
Packaging Quantity	660
Packaging Method	Box & Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2	2011/65/EU
---------------------	------------

Compliant

EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides


Data Connectivity Housings, Housing for Female Terminals, A, Cable-to-Cable, 1 Position, Sealable, Shielded, Cable Exit Angle 180°, Crimp, AMPSEAL 16



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



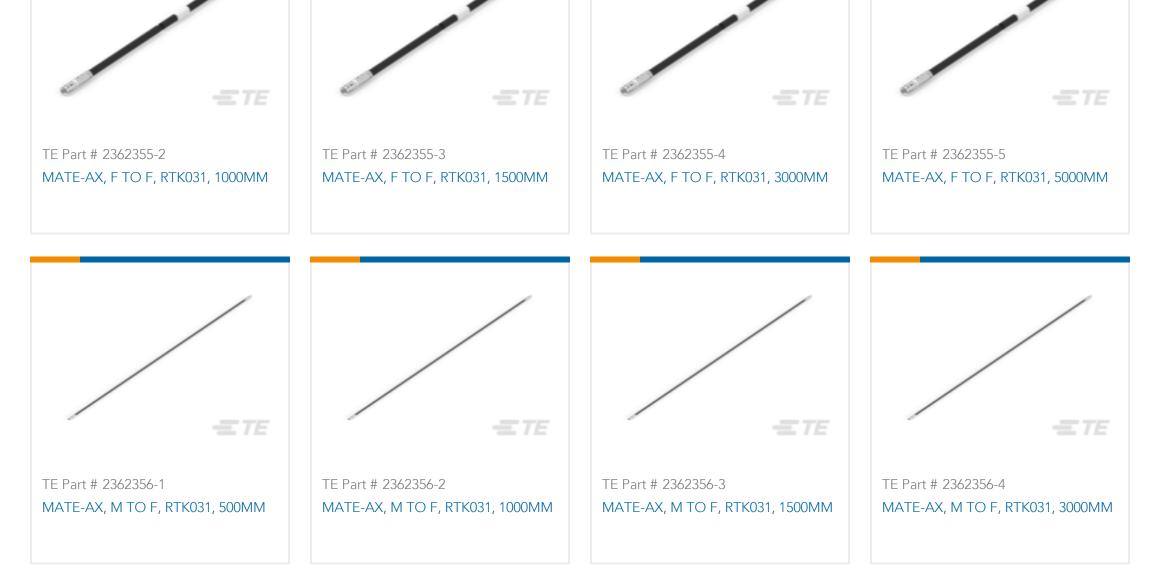


Data Connectivity Housings, Housing for Female Terminals, A, Cable-to-Cable, 1 Position, Sealable, Shielded, Cable Exit Angle 180°, Crimp, AMPSEAL 16






Also in the Series | AMPSEAL 16

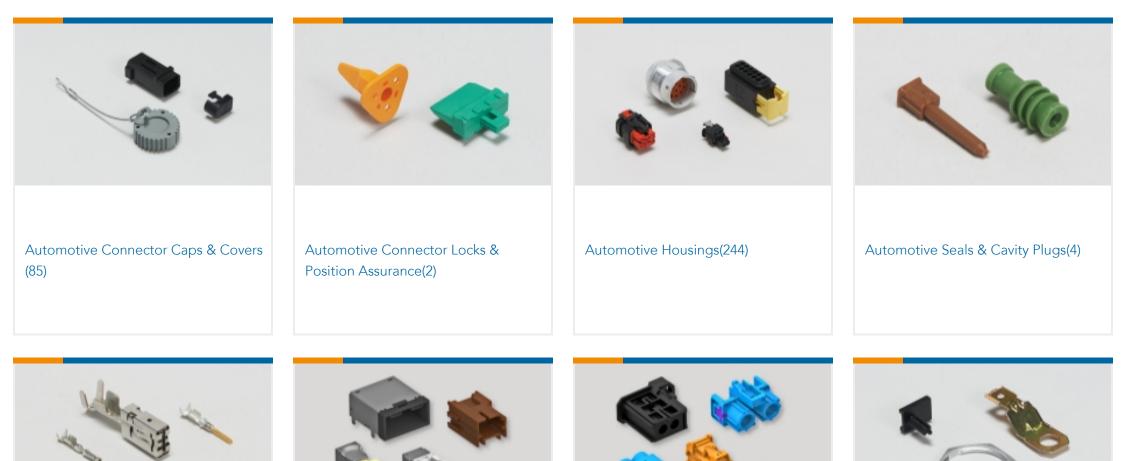

Automotive Terminals(33)	Data Connectivity Headers(2)	Data Connectivity Housings(3)	Other Automotive Connector	
			Accessories(11)	

Customers Also Bought

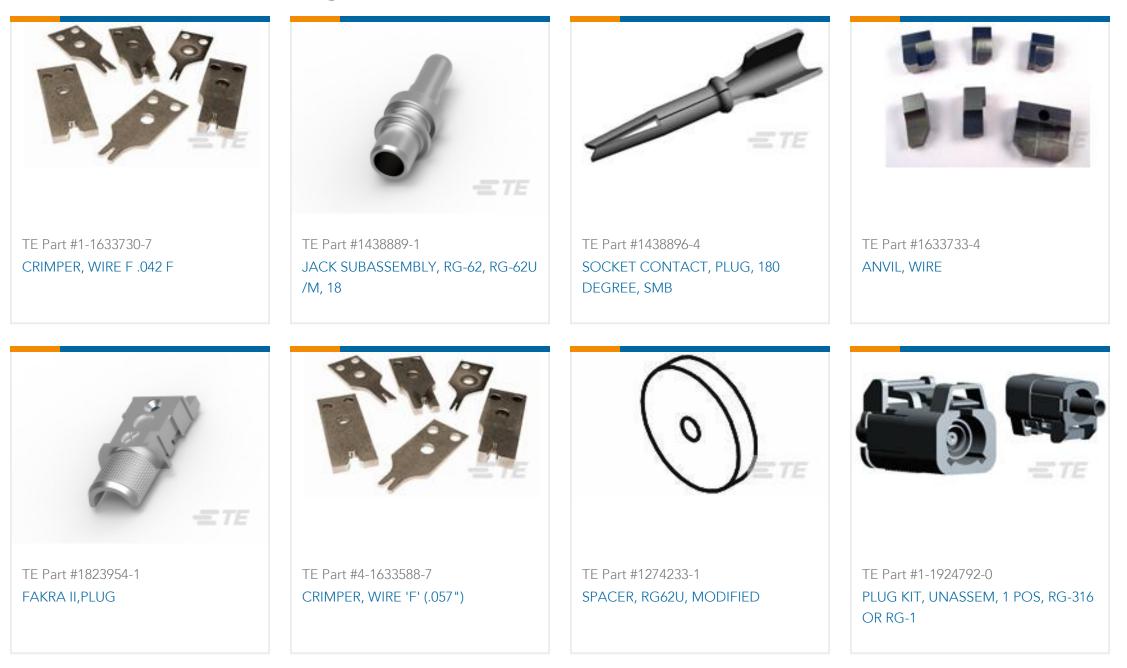

Data Connectivity Housings, Housing for Female Terminals, A, Cable-to-Cable, 1 Position, Sealable, Shielded, Cable Exit Angle 180°, Crimp, AMPSEAL 16





Documents

Product Drawings 1POS,COAX,SOC HSG ASSY,SLD

English

1POS,COAX,SOC HSG ASSY,SLD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2355843-1_A.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_2355843-1_A.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_2355843-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English