

AMP | Heavy Duty Sealed Connector Series

TE Internal #: 1-2358263-1 Housing for Female Terminals, Wire-to-Wire, 13 Position, 7.5 mm / 4 mm / 5 mm Centerline, Sealable, Black, Heavy Duty Sealed Connector Series

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > Heavy Duty Sealed Connector Series Housings



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.5 mm, 2.8 mm, 5.8 mm

Connector System: Wire-to-Wire

Number of Positions: 13

Centerline (Pitch): 4 mm, 5 mm, 7.5 mm

All Heavy Duty Sealed Connector Series Housings (204)



Features

Product Type Features

Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	Yes
Primary Locking Feature	On the Terminal
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Number of Positions	13
Number of Rows	1, 2
Electrical Characteristics	

Housing for Female Terminals, Wire-to-Wire, 13 Position, 7.5 mm / 4 mm / 5 mm Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Operating Voltage	60 VDC
Nominal Voltage Architecture	12 V, 24 V, 42 V, 60 V
Body Features	
Cable Exit Angle	180°, 90°
Primary Product Color	Black
Connector & Keying Code	A
Contact Features	
Contact Size	1.5K, 2.8mm, 4.8K, 6.3mm
Contact Type	Receptacle
Mating Tab Width	1.5 mm, 2.8 mm, 5.8 mm
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	4 mm, 5 mm, 7.5 mm
Dimensions	
Connector Height	31.25 mm
Product Width	25.7 mm
Product Length	67.2 mm
Row-to-Row Spacing	6 mm
Usage Conditions	
Operating Temperature Range	-40 – 140 °C
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IP67, IP69K
UL Flammability Rating	UL 94V-0
Packaging Features	

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 13 Position, 7.5 mm / 4 mm / 5 mm Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Packaging Method	Box	
Other		
Serviceable	Yes	
Connector Position Assurance Capable	No	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts




Housing for Female Terminals, Wire-to-Wire, 13 Position, 7.5 mm / 4 mm / 5 mm Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Also in the SeriesHeavy Duty Sealed Connector SeriesImage: SeriesImage: SeriesImage: SeriesAutomative Connector Cape & Cavere
(2mm)Image: Automative Housings(20)Image: Automative Seale & Cavity Plug(x)Image: Seale SeciesAutomative Connector Cape & Cavere
(2mm)Image: Automative Seale & Cavity Plug(x)Image: Seale SeciesImage: Seale SeciesImage: Seale & Cavity Plug(x)Image: Seale & Cavity Plug(x)Image: Seale SeciesImage: Seale SeciesImage: Seale & Cavity Plug(x)Image: Seale & Cavity Plug(x)Image: Seale SeciesImage: Seale SeciesImage: Seale & Cavity Plug(x)Image: Seale & Cavity Plug(x)Image: Seale SeciesImage: Seale SeciesImage: Seale & Cavity Plug(x)Image: Seale & Cavity Plug(x)Image: Seale SeciesImage: Seale SeciesImage: Seale & Cavity Plug(x)Image: Seale & Cavity Plug(x)Image: Seale SeciesImage: Seale SeciesImage: Seale & Cavity Plug(x)Image: Seale & SeciesImage: Seale & Seale & SeciesImage: Seale & S

Customers Also Bought

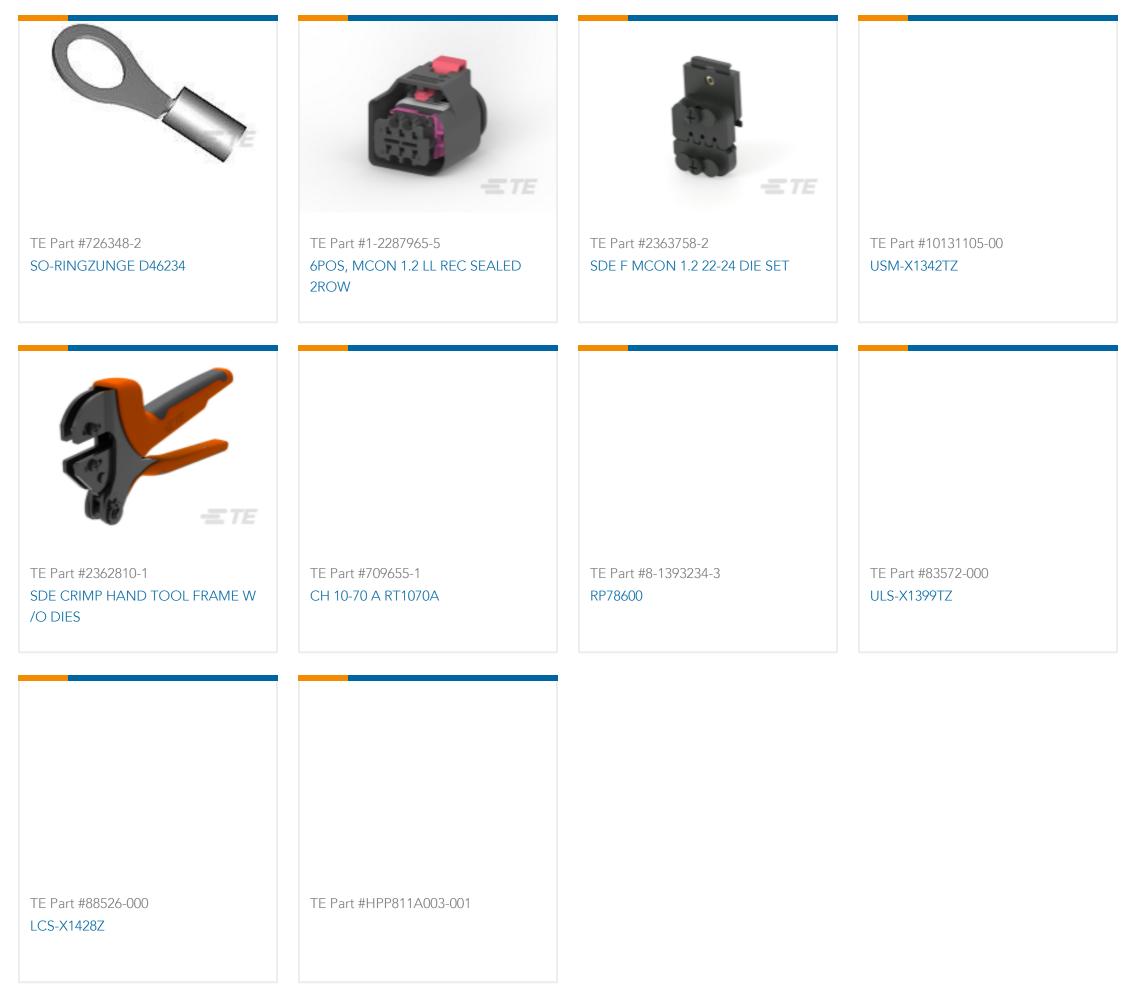

Housing for Female Terminals, Wire-to-Wire, 13 Position, 7.5 mm / 4 mm / 5 mm Centerline, Sealable, Black, Heavy Duty Sealed Connector Series



Documents

Product Drawings 13POS,REC HSG ASSY,SLD,COD A

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-2358263-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2358263-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2358263-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English