

**RoHS  
Compliant**

## Features

- Input / Output configuration selected via DIP switch combinations
- Choice of multiple analog input-output configurations
- Provides 3-way galvanic isolation of 3.75kV
- Fast output Response Time (<100ms)
- Sleek 22.5mm wide


## Specification

Part Number	MP008417	MP008418	MP008419
<b>Parameters</b>			
Supply Voltage	24V AC		
Supply Variation	-15% to +15%		
Power Consumption	4 VA Max.		
<b>Device Characteristics</b>			
Input Signal	0-10V DC 2-10V DC 0-20mA DC 4-20mA DC	0-5 V DC 1-5 V DC 0-20mA DC 4-20mA DC	0-10V DC 2-10V DC 0-10mA DC 2-10mA DC
Input Impedance	Voltage I/P - 100KΩ approx. Current I/P - 100Ω approx.		Voltage I/P - 100KΩ approx. Current I/P - 200Ω approx.
Output Signal	0-10V DC, 2-10V DC (min. 1 kΩ load) 0-20mA DC,4-20mA DC (max. 500 Ohm load)		
Accuracy	1% of full Scale		
Offset	± 5% of full scale Adjustable		
Gain	± 10% of full scale Adjustable		
Linearity	<0.02% of full scale		
<b>Protections</b>			
Input supply reverse polarity	Yes		
Input signal reverse polarity	Yes		
Output short circuit current	<25mA (Output Voltage mode)		
Output open circuit voltage	(12-14)V DC (Output Current mode)		
LED Indication	GREEN LED: Power ON		
Operating Temperature	10°C to +55°C		
Storage Temperature	-15°C to +60°C		
Humidity (Non Condensing)	95% (Rh)		
Enclosure	Flame Retardant UL94-VO		
Dimension (W x H x D)	22.5mm × 83mm × 100.5mm		
Weight (unpacked)	130 g		
Mounting	Base / DIN rail		
Degree of Protection	IP 20 for Terminals, IP 40 for Enclosure		

Mode	Input Voltage / Input Current			Output Signal
	(0-10)V / (0-20)mA	(0-5)V / (0-20)mA	(0-10)V / (0-10)mA	(0-10)V
	(0-10)V / (0-20)mA	(0-5)V / (0-20)mA	(0-10)V / (0-10)mA	(0-20)mA
	(0-10)V / (0-20)mA	(0-5)V / (0-20)mA	(0-10)V / (0-10)mA	(2-10)V
	(0-10)V / (0-20)mA	(0-5)V / (0-20)mA	(0-10)V / (0-10)mA	(4-20)mA
	(2-10)V / (4-20)mA	(1-5)V / (4-20)mA	(2-10)V / (2-10)mA	(0-10)V
	(2-10)V / (4-20)mA	(1-5)V / (4-20)mA	(2-10)V / (2-10)mA	(0-20)mA
	(2-10)V / (4-20)mA	(1-5)V / (4-20)mA	(2-10)V / (2-10)mA	(2-10)V
	(2-10)V / (4-20)mA	(1-5)V / (4-20)mA	(2-10)V / (2-10)mA	(4-20)mA


1 2 3 4 5 6

## Mounting Dimensions

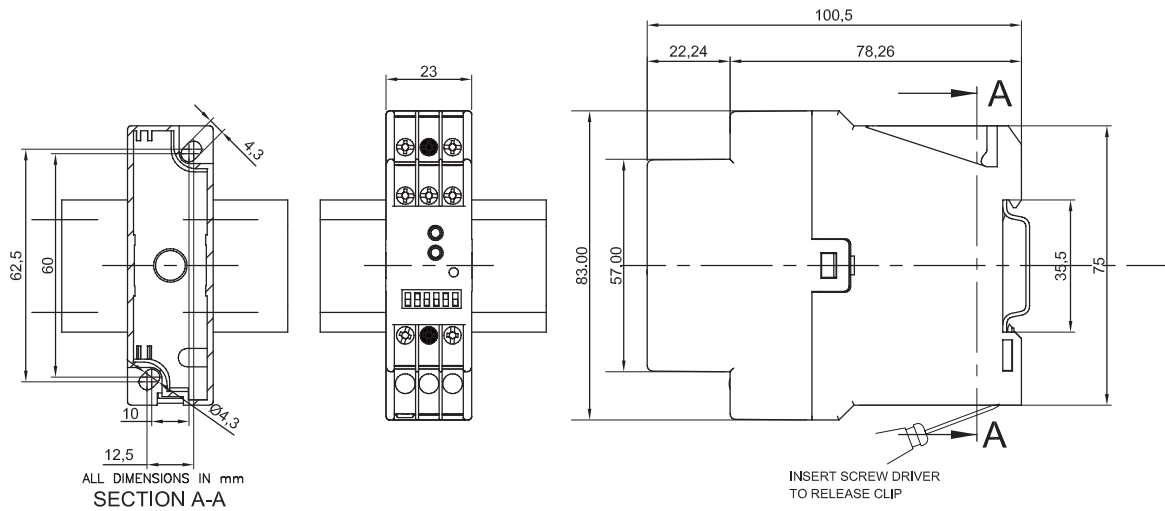


Dimensions : Millimetres



## Connection Diagram

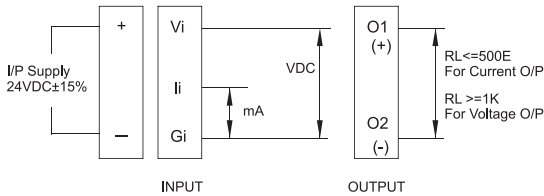

## 3 Port Isolation Diagram



## Terminal Torque & Capacity

 Ø 3.5 mm...4.0mm	0.60 N.m (6 Lb.in)
	1 x 4.0 mm <sup>2</sup> Solid/Stranded Wire
AWG	1 x 20 to 10

## Part Number Table

Description	Part Number
Signal Transducer, 3 Port Isolation, Base/DIN	MP008417
Signal Transducer, 3 Port Isolation, Base/DIN	MP008418
Signal Transducer, 3 Port Isolation, Base/DIN	MP008419

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.