

# storm 6000 Series Keypad



## Numeric Data Entry in Exposed Public Environments

- Rugged, reliable and responsive data entry
- Vandal Resistant (20J BS EN 60068-2-75: 1997)
- Weather Resistant (IP65)
- Large buttons for clarity and ease of use
- Permanent, high contrast, laser engraved keypad graphics
- Raised tactile symbols on coloured function keys
- Raised "home pip" on the "5" key
- 4 Row x 4 Column matrix circuit format
- Optional USB or PS2 encoded interface circuit (enclosed in water resistant pod)
- Optional PS2 or USB connection cable (supplied separately)
- Suitable for use by those with mobility or sensory impairment
- Overall dimensions: 124.0 mm x 118.5 mm x 17.5 mm (excluding interface pod on back face)







# 6000 Series keypad for public environments



## UK Keypad Layout

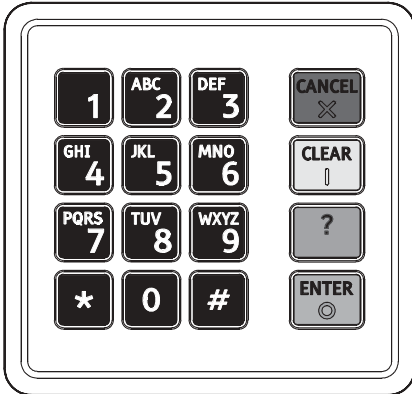

## USA Keypad Layout

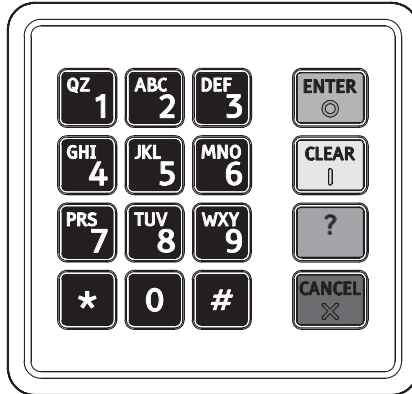


### Function Key Colours

CANCEL	Red
CLEAR	Yellow
?	Blue
ENTER	Green



## Matrix Keypad Connections

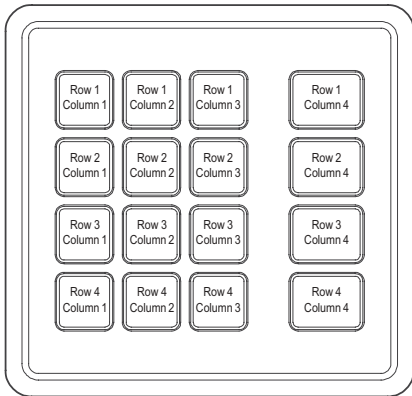

### Contact Connections (viewed from rear of keypad)

PINS	.....
PIN NO.	13 12 11 10 9 8 7 6 5 4 3 2 1

## Contact Matrix

PINS	ROW / COLUMN
1	Not used
2	Tamper
3	R1
4	R2
5	C1
6	C2
7	C3
8	C4
9	R4
10	R3
11	NC
12	Tamper
13	Not used

CONTACT CIRCUIT SPECIFICATION	
Contact	
Operating Voltage	24V dc (max)
Operating Current	50 mA (max)
Circuit Resistance (normally closed)	<500 Ohms

## PS2 / USB Keypad Code Tables

Row / Column	UK Layout		USA layout	
	PC / AT Code (Code Set 2)	USB Key Code	PC / AT Code (Code Set 2)	USB Key Code
R1C1	69	59	69	59
R1C2	72	5A	72	5A
R1C3	7A	5B	7A	5B
R1C4	76	29	5A	28
R2C1	6B	5C	6B	5C
R2C2	73	5D	73	5D
R2C3	74	5E	74	5E
R2C4	66	2A	66	2A
R3C1	6C	5F	6C	5F
R3C2	75	60	75	60
R3C3	7D	61	7D	61
R3C4	05	3A	05	3A
R4C1	7C	55	7C	55
R4C2	70	62	70	62
R4C3	5D	31	12, 26	E1, 20
R4C4	5A	28	76	29
Anti-Tamper Open Circuit	Not used			

## Specifications

- Vandal Resistant **20J BS EN 60068-2-75:1997**
- Weather Resistant **IP65**
- Large Buttons for clarity and ease of use **15mm square**
- Function Key Buttons **15mm x 20mm**
- Responsive key action **travel 1.5mm, actuation force 130gm**
- High contrast laser engraved graphics **in line with current ADA and DDA recommendations**
- Raised tactile symbols on function keys **In line with current ADA and DDA recommendations.**
- Panel Cutout **109.5 x 115.0 x R 5mm corners( tols - 0.2mm)**
- Operating Temp **-20°C to +60°C**
- Matrix Output, or user selectable PS2/USB **(Order cables separately)**
- Meets CE and UL requirements for Product Safety
- Meets CE and FCC requirements for EMC
- Integral anti-tamper (only on encrypted and matrix versions)
- Plug compatible with 420 Series RS232 Encoder
- Panel Mount Gasket included

## Ordering Details

Stock No.	Item
6000-21001[x]	Keypad 6000 Series 16 way Matrix Output UK Layout
6000-21002[x]	Keypad 6000 Series 16 way Matrix Output USA Layout
6000-22001[x]	Keypad 6000 Series 16 way PS2 / USB, UK Layout
6000-22002[x]	Keypad 6000 Series 16 way PS2 / USB, USA Layout
6000-MK00[x]	Mounting Clips Underpanel for 6000 Series
1200-00100[x]	Cable, 2.5m, PS/2 to 5 way Molex
1200-00200[x]	Cable, 2.5m, USB to 5 way Molex
4200-00[x]	Encoder 420 Series, RS232, No Cable, Plug-in

6000 Series Application/Engineering Manual — free download from [www.keymat.com](http://www.keymat.com)

[x] denotes packaging variant

Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.



6000-lit-01 Rev 1 Jan 2004  
Designed & produced by NIK Design: +44 (0)7810 551046



FM 39602



usa office:  
storm data entry technology  
suite 202  
364 pennsylvania avenue  
glen ellyn IL 60137 USA  
tel: (630) 469 2981  
fax: (630) 469 2975  
email: [sales.usa@storm-keypads.com](mailto:sales.usa@storm-keypads.com)  
website: [www.storm-keypads.com](http://www.storm-keypads.com)

uk office:  
keymat technology ltd  
14 bentinck court  
bentinck road  
west drayton  
middlesex ub7 7rq  
tel: +44 (0)1895 431421  
fax: +44 (0)1895 431132  
email: [sales@keymat.com](mailto:sales@keymat.com)  
website: [www.keymat.com](http://www.keymat.com)

Storm is a trademark of Keymat Technology Ltd