

Series: External Stubby

TECHNICAL DATA SHEET

Description: Dualband WiFi SMA Stubby Antenna

PART NUMBER: W1100X



W1100



W1100K W1100KRP

Features:

- Freq: 2.4-2.5/4.9-5.95GHz
- Fixed Stubby Low Profile Monopole Antenna
- Gain 1 / 3 dBi
- Ingress Protection IP65
- UV Protection
- RoHS Compliant Product
- Connector Type: See page 2

Applications:

- WiFi, Zigbee, BLE/BT, WLAN
- (Metering, Security, IoT Applications
- Mining, Utility, and Industrial Applications
- Outdoor Networking
- Data Transmission
- Access Points

All dimensions are in mm / inches

Issue: 1848

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: Dualband WiFi SMA Stubby Antenna

PART NUMBER: W1100X

Series: External Stubby

ELECTRICAL SPECIFICATIONS

Antenna Type Monopole

Frequency 2400-2500/4900-5950MHz

Nominal Impedance 50 Ω Return Loss(@2400-2500MHz) -6dB

Return Loss(@4900-5950MHz) -1.5dB Max / -6dB Typ.

Radiation Pattern Omni

Gain 1 / 3dBi Typ.

Efficiency 40% Typ.
Polarization Vertical

MECHANICAL SPECIFICATIONS

Overall Length 50.8mm

Weight 4.1g

Antenna Color / Material Black

Connector type SMA Male (W1100)

RA SMA Male (W1100K)

RA RP SMA Male (W1100KRP)

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -40°C~+85°C
Storage Temperature -40°C~+85°C

IP Rating IP65
RoHS Compliant Yes

Issue: 1848




Description: Dualband WiFi SMA Stubby Antenna

PART NUMBER: W1100X


Series: External Stubby

MECHANICAL DRAWING

W1100

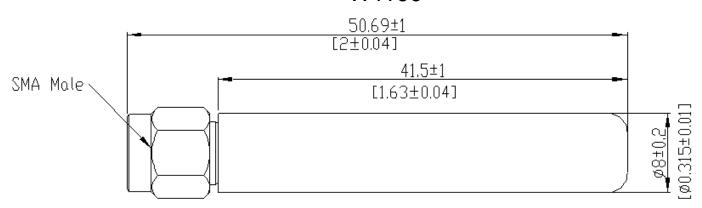

W1100K / W1100KRP

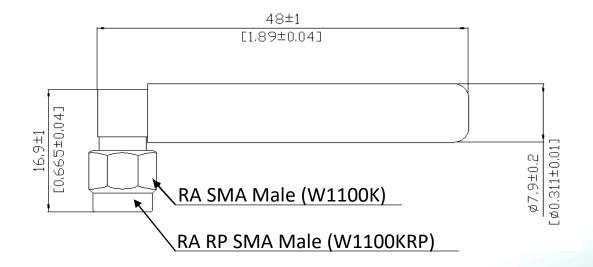




Description: Dualband WiFi SMA Stubby Antenna

PART NUMBER: W1100X

Series: External Stubby

TEST SETUP

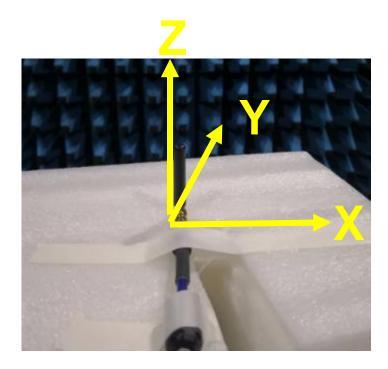

Antenna is a monopole antenna. All data in this document is tested without any additional ground plane. Antenna in free space.




Description: Dualband WiFi SMA Stubby Antenna

PART NUMBER: W1100X


Series: External Stubby

CHARTS

Return Loss vs Frequency

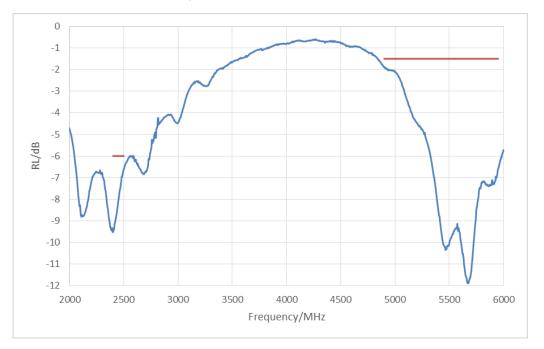

Gain vs Frequency

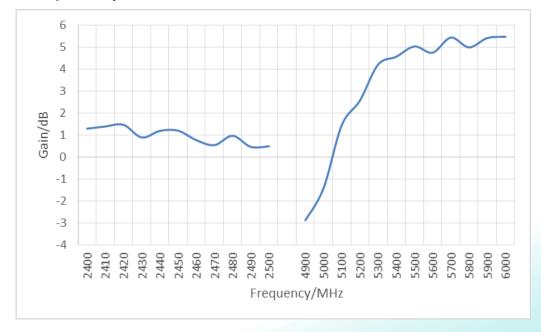

Issue: 1848

ROHS




Description: Dualband WiFi SMA Stubby Antenna

PART NUMBER: W1100X

Series: External Stubby

CHARTS

Efficiency vs Frequency

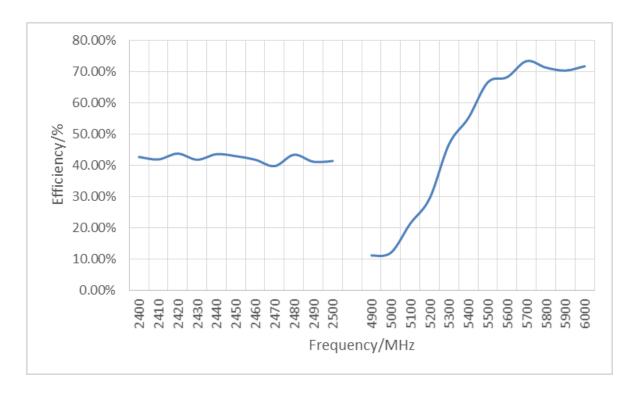





Description: Dualband WiFi SMA Stubby Antenna

PART NUMBER: W1100X


Series: External Stubby

CHARTS

Free Space Radiation Pattern

Elevation Plane

Horizontal Plane

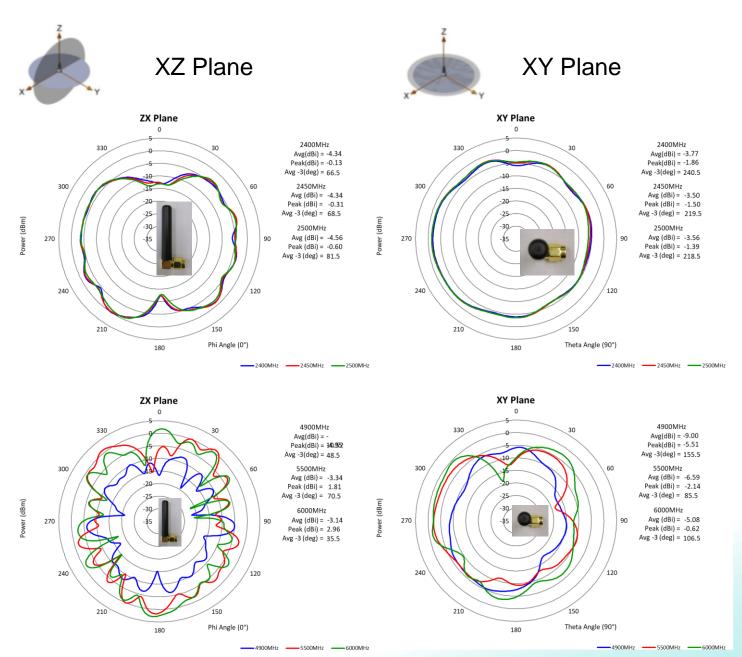

Issue: 1848

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: Dualband WiFi SMA Stubby Antenna

PART NUMBER: W1100X

Series: External Stubby

PACKAGING

W1100

Pack 20pcs antenna in one PE bag, 100pcs PE bag (2000pcs Antenna) in one carton

W1100K / W1100KRP

Pack 20pcs antenna in one PE bag, 72pcs PE bag (1440pcs Antenna) in one carton

