



Description: 6-8.5GHz UWB Antenna

PART NUMBER: W3340





Features:

- 6-8.5GHz
- Stable radiation pattern over operating band enables superior performance in impulse radio
- Minimal hand loss
- Keep out area only 7x4.6mm
- Miniature Antenna size 3.2x1.6x1.1mm
- Moisture Sensitivity Level: MSL1

Applications:

- Ultra Wide Band radios
- Remote controls
- Key fobs
- M2M, IoT
- Transportation
- Security

All dimensions are in mm / inches

Issue: 2101

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 9863 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



TECHNICAL DATA SHEET

Description: 6-8.5GHz UWB Antenna

PART NUMBER: W3340

Series: Chip Antenna

ELECTRICAL SPECIFICATIONS

Frequency 6-8.5 GHz

Nominal Impedance 50Ω

Return loss in free space (*) 9 dB

Total Efficiency in free space (*) >65 %

Peak Gain in free space (*) >1.5 dBi

Power withstanding (*) W

*Measured on test PCB



TECHNICAL DATA SHEET

Description: 6-8.5GHz UWB Antenna

PART NUMBER: W3340

Series: Chip Antenna

MECHANICAL SPECIFICATIONS

Material High temperature ceramic

Radiator Ag

Weight 33mg

Overall Length 3.2*1.6*1.1mm

MSL (Moisture Sensitivity Level) 1

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-40/+85° C

Storage

To maintain solderability of Pulse ceramic products care must be taken to control the storage and use conditions:

- Do not store or use products in a corrosive atmosphere, especially where chloride, sulphur or sulfide, alkali or acid salts exist in the air. Corrosive gases may cause oxidation of electrodes and reduce solderability
- Keep temperature and humidity stabile and do not exceed the below mentioned minimum and maximum conditions: Temperature: -10 to +30 Deg C, Humidity: below 60% RH
- Do not store the products under direct sun light.






Description: 6-8.5GHz UWB Antenna

PART NUMBER: W3340

MECHANICAL DRAWING

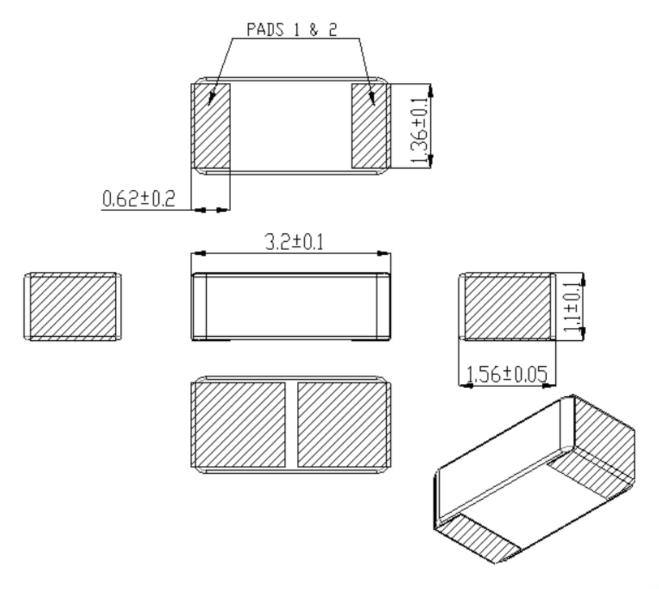

Note:

Antenna is symmetrical, pad 1 and 2 orientation can be swapped without affecting performance.






Description: 6-8.5GHz UWB Antenna

PART NUMBER: W3340

OTHER SPECIFICATIONS

Test setup for electrical parameters

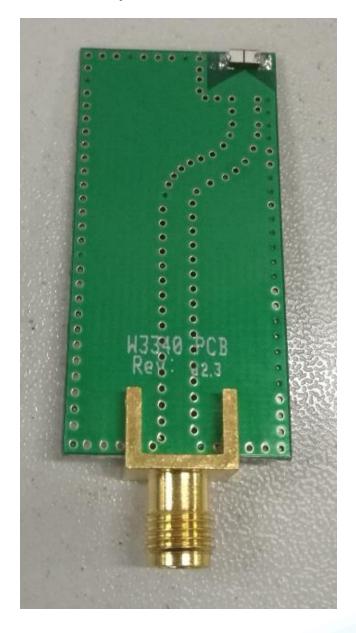







Description: 6-8.5GHz UWB Antenna

PART NUMBER: W3340

MECHANICAL DRAWING

Test PCB and Antenna footprint PCB layout

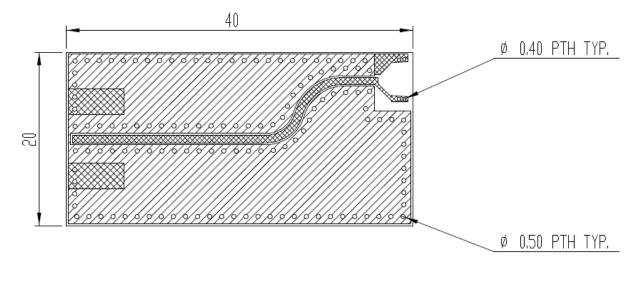

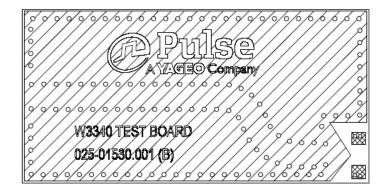






Description: 6-8.5GHz UWB Antenna

PART NUMBER: W3340


CHARTS

S11 in free space,dB

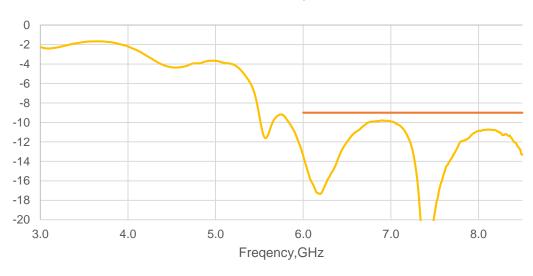

----W3340_W50

Total efficiency in free space, dB

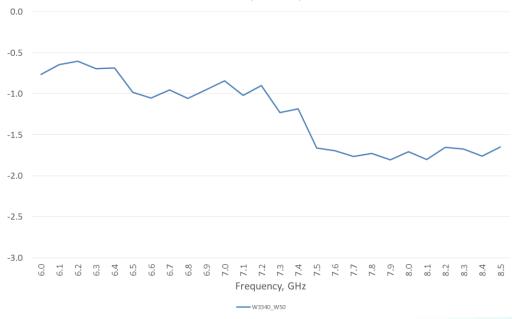







Description: 6-8.5GHz UWB Antenna

PART NUMBER: W3340

CHARTS

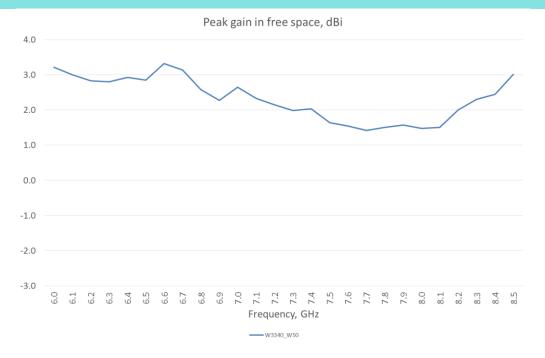

Antenna alignment in spherical coordinate system

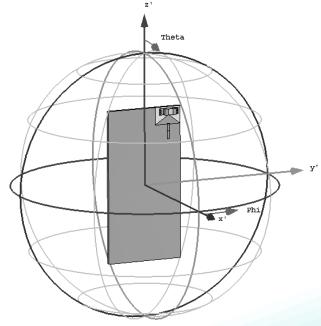






Description: 6-8.5GHz UWB Antenna


PART NUMBER: W3340

CHARTS

Horizontal plane gain, dBi

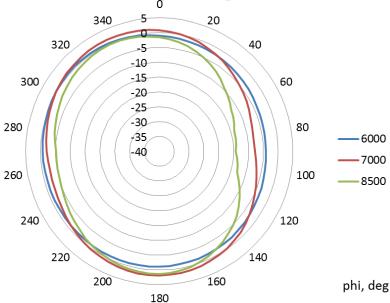

Vertical plane gain, dBi

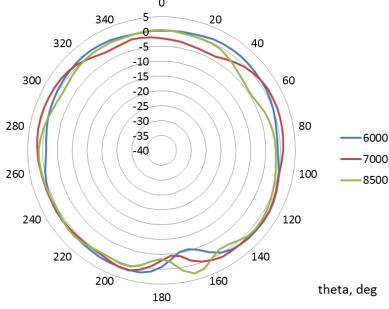





Description: 6-8.5GHz UWB Antenna

PART NUMBER: W3340

PACKAGING

Tape and reel packing is used. 3000pcs antenna/reel, 10 reels/inbox, 2 inbox(60000pcs antenna)/outbox.

