




Series: Internal Antenna

PART NUMBER: W3918BXXX

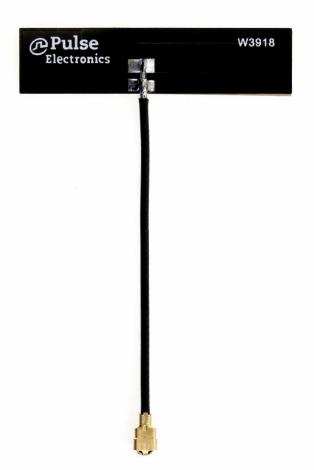

Features:

- 2400-2500 / 4900-7125 MHz
- Size 35.2 X 8.5 X 0.15 mm
- Efficiency > 60/70%
- VSWR < 2
- Nominal impedance 50 Ω
- Cable and connector can be customized

Applications:




- WiFi 6E, 802.11ax
- · Bluetooth, BLE, ZigBee
- DSRC
- · ISM band radios
- IoT, M2M

All dimensions are in mm / inches

Issue: 2020

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998





Series: Internal Antenna

PART NUMBER: W3918BXXX

ELECTRICAL SPECIFICATIONS

Antenna Type Dipole

Frequency 2400-2500MHz

4900-7125MHz

Nominal Impedance 50Ω

Return Loss 2400-2500MHz<-10db

4900-7125MHz<-6db

Radiation Pattern Omni

Gain 1.5+/-1dBi@2400-2500MHz

3.5+/-1dBi@4900-7125MHz

Efficiency 60%@2400-2500MHz

50%@4900-7125MHz

Polarization Linear

Power Withstanding 5W

(*) All RF parameters measured on 2mm thick PC plate





Series: Internal Antenna

PART NUMBER: W3918BXXX

MECHANICAL SPECIFICATIONS

Radiator material FPC

Color Black

Adhesive 3M467

Thickness(with adhesive, no liner) 0.15mm

Weight 0.32g

FPC size(L X W X T) 35.2 X 8.5 X 0.15mm

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40/+85 ° C







Series: Internal Antenna

PART NUMBER: W3918BXXX

MECHANICAL DRAWING

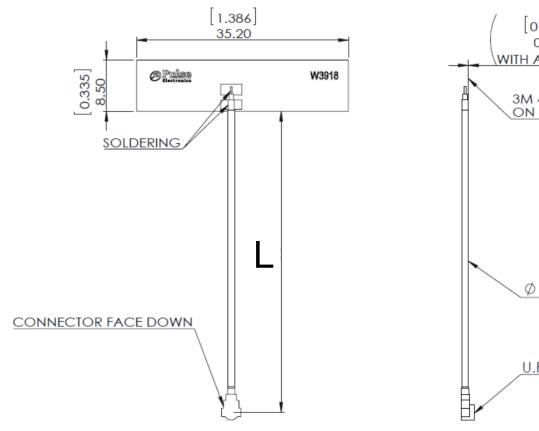

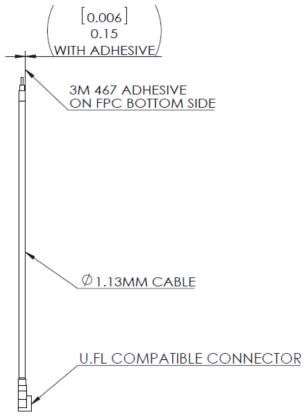

PN	L=CABLE LENGTH(MM)
W3918B0050	50
W3918B065	65
W3918B075	75
W3918B0100	100
W3918B120	120
W3918B140	140







Series: Internal Antenna

PART NUMBER: W3918BXXX

CHARTS

Test Setup



(*) All RF parameters measured on 2mm thick PC plate








Series: Internal Antenna

PART NUMBER: W3918BXXX

CHARTS

Return Loss

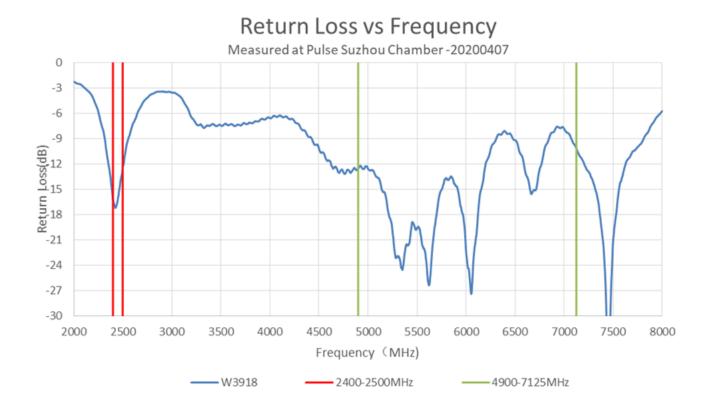

(*) All RF parameters measured on 2mm thick PC plate








Series: Internal Antenna

PART NUMBER: W3918BXXX

CHARTS

Efficiency

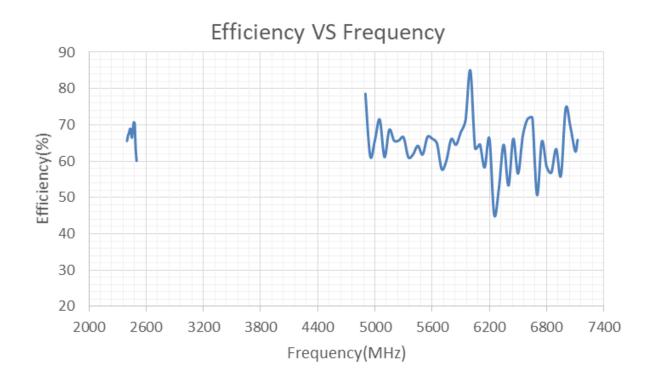

(*) All RF parameters measured on 2mm thick PC plate








Series: Internal Antenna

PART NUMBER: W3918BXXX

CHARTS

Peak Gain

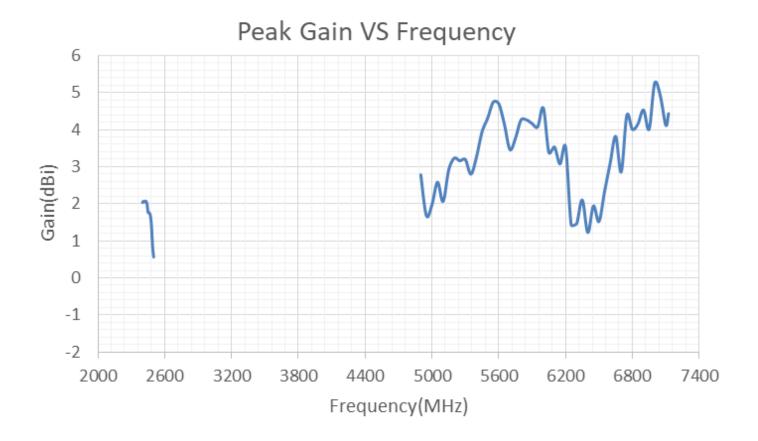

(*) All RF parameters measured on 2mm thick PC plate









Series: Internal Antenna


PART NUMBER: W3918BXXX


CHARTS

Radiation Patterns 2400-2500MHz



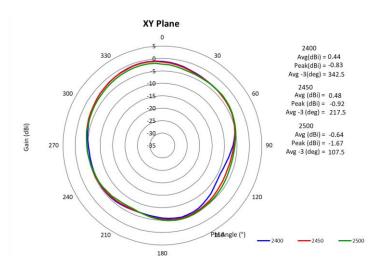

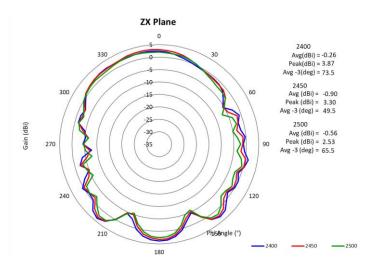

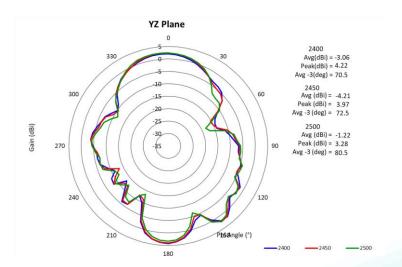

(*) All RF parameters measured on 2mm thick PC plate

Issue: 2020

ROHS







Series: Internal Antenna


PART NUMBER: W3918BXXX


CHARTS

Radiation Patterns 4900-5900MHz



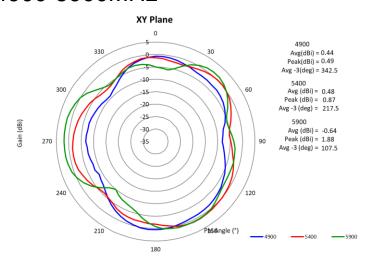

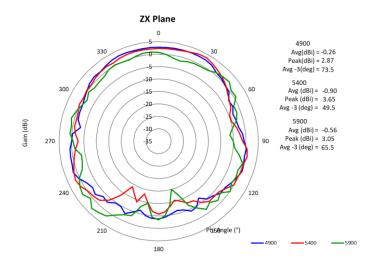

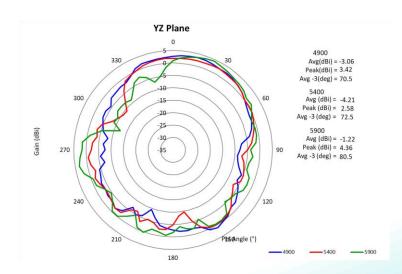

(*) All RF parameters measured on 2mm thick PC plate

Issue: 2020

ROHS







Series: Internal Antenna


PART NUMBER: W3918BXXX


CHARTS

Radiation Patterns 6000-7125MHz



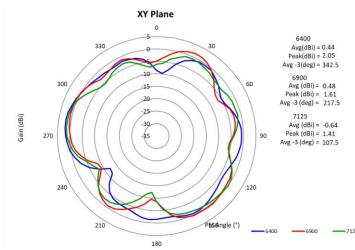

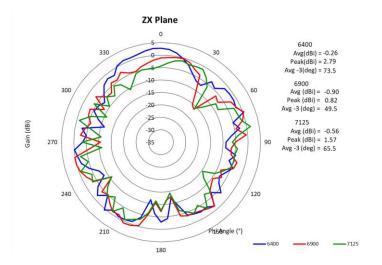

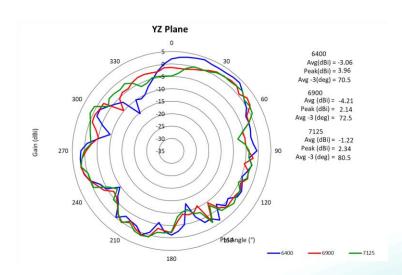

(*) All RF parameters measured on 2mm thick PC plate

Issue: 2020

ROHS





Series: Internal Antenna

PART NUMBER: W3918BXXX

PACKAGING

10PCS/PE bag 10 PE bag/foam bag 50 foam bag/ carton box

Total 5000PCS/Carton box



