AC Axial Fan







Characteristics

Motor Design : Single phase, 4-poles Brushless DC motor.

 $\begin{array}{lll} \mbox{Insulation Resistance} & : 10 \ \mbox{M}\Omega \ \mbox{minimum at 500V DC.} \\ \mbox{Dielectric Strength} & : 1800V \mbox{ AC for one second.} \\ \mbox{Motor Protection} & : \mbox{Impedance Protected.} \\ \end{array}$

Noise Level : Measured in a semi-anechoic chamber with background noise level below 15 dB(A).

The fan is running in free air with the microphone at a distance of one meter from the

fan intake.

Tolerance : + 20% on rated power and current.

Air Performance : Measured by a double chamber. The values are recorded when the fan speed has

stabilized at rated voltage.

Specification

Rated Voltage : 110V AC to 230V AC 50Hz/60Hz
Operating Voltage Range : 90V AC to 265V AC 50~60 Hz
Safety Certification Voltang Range : 100V AC to 240V AC 50~60 Hz
Starting Voltage : 85V AC (25°C Power ON/OFF)

Rated Speed : 3000 RPM ±10%

Air Delivery : 90.1 CFM / Min. 77.9 CFM

Static Pressure : 0.31 Inch-H₂O / Min. 0.25 Inch-H₂O

Rated Current : 61 mA / 37 mA Rated Power : 3.4 Watts

Noise Level : 40.2 dB(A) / Max. 44 dB(A)

Direction of Rotation : Counter-clockwise viewed from front of fan blade

Operating Temperature : -25° C to $+70^{\circ}$ C Storage Temperature : -40° C to $+70^{\circ}$ C

Bearing System : Precision ball bearing system

Weight : 317g

Safety : UL/CUR/TUV/CE Approvals
Protection : Automatic Restart Capability

IP Class : IP68

Protection

Automatic Restart


Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



AC Axial Fan



Performance Curves

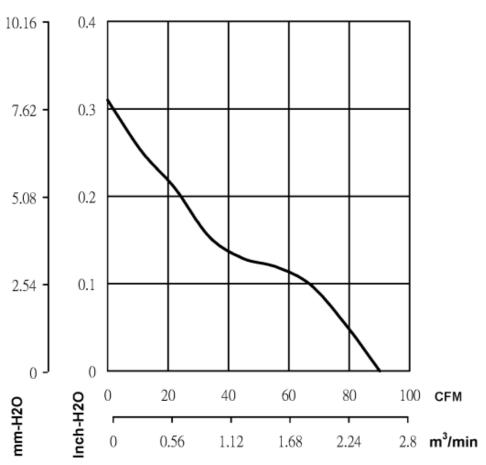


Dimensions

Screw Type (Pan Head)	Torque	Screw Spec.	
		Size	Standard
Machine Screw	3~4 kgf-cm	M4	JISB1111-1974
Self-Tapping Screw	5~8 kgf-cm	Ф5	JISB1122 Type 2

AC Axial Fan



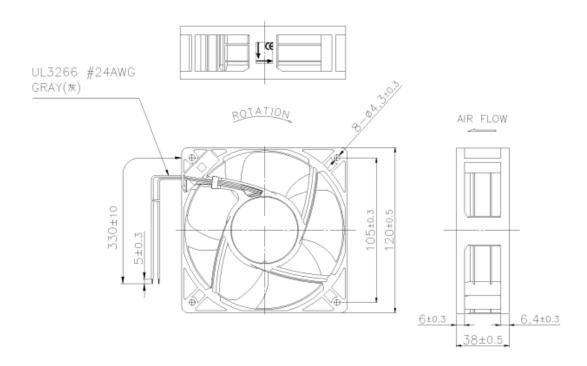

Best Mounting Direction: Any orientation.

Dimensions: Millimetres

Part Number Table

Description	Part Number	
AC Axial Fan, 120mm × 38mm, 100V-240V AC, IP21	MP-CF4113HBT-10000-AA9	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

