
PD617-3800M443







1

Features & Applications:

- @ 4G / 5G-FR1 617-3800MHz
- 4-Port MiMo
- In-building wall mount, bracket included
- Directional radiation pattern
- Low PIM and SAR compliant
- @ Connector 4.3-10-Female as standard
- *Programmer Political Programmer Political Political Political Programmer Political*

ELECTRICAL SPECIFICATIONS								
PD617-3800N	1443							
Frequency range		MHz	617-697	698-960	1710-2700	3300-3800		
Gain		dBi	6.0±1	7.0±1	8.0±1	8.0±1		
Polarization			+/-45deg slant					
Beam width	Horizontal	deg	80	90	70	60		
	Vertical		80	80	60	40		
VSWR			≤2.0	≤2.0	≤1.8	≤1.8		
Front-to-back ratio		dB	15	20	25	25		
Isolation		dB	>15	>20	>20	>20		
PIM,3rd order,2x20W		dBc	≤-150					
Max. input power		W	50					
Impedance		Ohm	50					
SAR compliance			Compliant based on whole-body SAR limit RF Exposure calculation (CEI EN 50383)					

MECHANICAL SPECIFICATIONS								
PD617-3800M443								
Dimension (W x L x H)			Housing Color		or	Weight with mounting kit	Mounting Kit	
410 x 305 x 84 mm (16.14 x 12.01 x 3.31 inch)		U	ABS, Whi			1 kg (2.2 lbs)	Wall mount (standard)	
Wireless Technology	No. of Port		Cable Length			Cable Type		Connector Type
4G,5G FR1 4			1Ft (0.3m)		Ø 0.160" low loss		4.3-10-Female	

ENVIRONMENTAL SPECIFICATIONS								
PD617-3800M443								
Operating Temperature	Storage Temperature	RoHS Compliant	Ingress Protection	Warranty				
-40 / +60° C	-40 / +60° C	Yes	IP50	2 years				

PD617-3800M443




Radiation Pattern – Vertical and Horizontal Plane

PD617-3800M443

Vertical and Horizontal planes

2

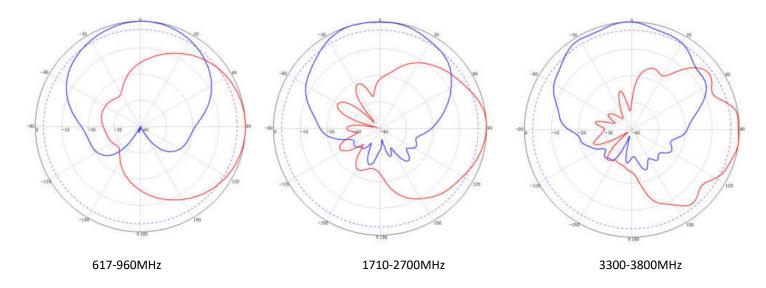


PD617-3800M443



Mechanical Drawing

PD617-3800M443

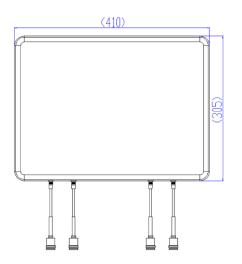




Test Setup

General / Chamber Setup

3

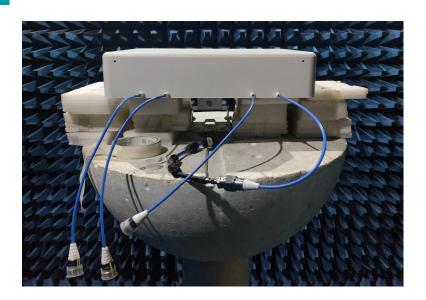

PD617-3800M443



PACKAGING

PD617-3800M443

1.Inner box: 475*415*155mm;


2.Outer box size: 815*485*450mm;

3.5Pcs/Carton;

Installation instructions

PD617-3800M443

Wall Installation

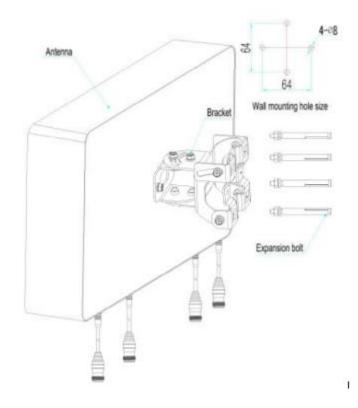

Notes:

1. Please contact sales for availability, lead time, and/or any special requests. Samples available upon request.

For More Information:

Americas - antennas.us@pulseelectronics.com | Europe - antennas.eu@pulseelectronics.com | Asia - antennas.as@pulseelectronics.com | Questions? +1-800-ANTENNA Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright , 2020. Pulse Electronics, Inc. All rights reserved. Company address: Pulse Electronics, a YAGEO Company, 15255 Innovation Drive, Suite #100, San Diego, CA 92128

'YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.'