
2378366-2 - ACTIVE

LEAVYSEAL

TE Internal #: 2378366-2 Receptacle, Wire-to-Wire, 58 Position, .137 in [3.5 mm] Centerline, Sealable, Blue, Wire & Cable, Power & Signal, LEAVYSEAL View on TE.com >



Connectors > Automotive Connectors > Automotive Housings

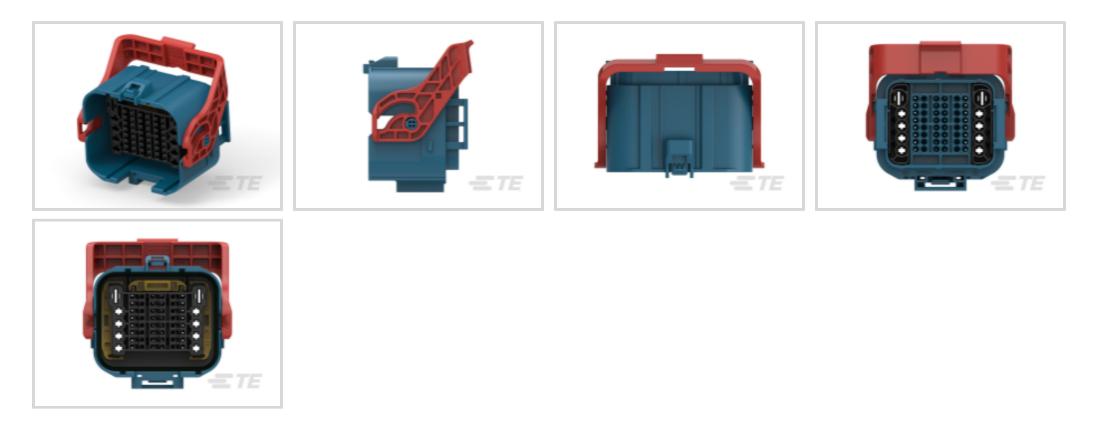

Connector System: Wire-to-Wire

Number of Positions: 58

Connector & Housing Type: Receptacle

Centerline (Pitch): 3.5 mm [.137 in]

Sealable: Yes

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Receptacle
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Locking Lance
Configuration Features	
Configuration Features Blank Cavity Position	0
	0 58
Blank Cavity Position	
Blank Cavity Position Number of Positions	58
Blank Cavity Position Number of Positions Number of Rows	58

Receptacle, Wire-to-Wire, 58 Position, .137 in [3.5 mm] Centerline, Sealable, Blue, Wire & Cable, Power & Signal, LEAVYSEAL



Body Features

Cable Exit Angle	180°
Primary Product Color	Blue
Contact Features	
Contact Size	1.2mm, 2.8K, 5.8mm
Contact Type	Tab
Mating Tab Width	1.2 mm, 2.8 mm, 6.3 mm[.047 in]
Mechanical Attachment	
Terminal Position Assurance	Yes
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF15
Centerline (Pitch)	3.5 mm[.137 in]
Dimensions	
Wire Size	.35 – 1.5 mm², .5 – .25 mm², 4. – 6. mm²

Usage Conditions

Operating Temperature (Max)	120 °C[248 °F]
Operating Temperature Range	-40 - 120 °C[-104 - 248 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IPX7, IPX9K
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	196
Packaging Method	Tray
Other	
Serviceable	Yes
Connector Position Assurance Capable	Yes

Receptacle, Wire-to-Wire, 58 Position, .137 in [3.5 mm] Centerline, Sealable, Blue, Wire & Cable, Power & Signal, LEAVYSEAL



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.11% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.11% in Component Part) Decamethylcyclopentasiloxane (D5) (.11% in Component Part) Mate Safe Usage Statements Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.


Compatible Parts

Receptacle, Wire-to-Wire, 58 Position, .137 in [3.5 mm] Centerline, Sealable, Blue, Wire & Cable, Power & Signal, LEAVYSEAL





Also in the Series | LEAVYSEAL

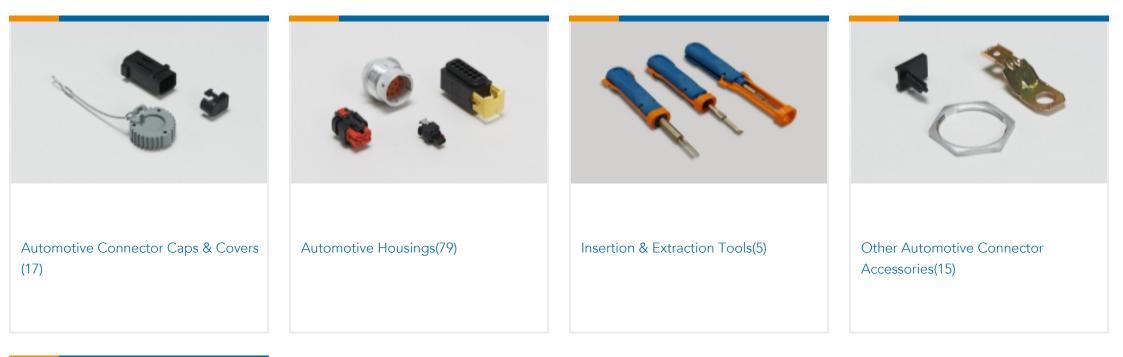



PCB Headers & Receptacles(16)

Documents

Product Drawings 58POS,HYBRID,REC HSG ASSY,SLD

English

CAD Files

Customer View Model

ENG_CVM_CVM_2378366-2_A.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2378366-2_A.3d_igs.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_2378366-2_A.2d_dxf.zip

English

S For support call+1 800 522 6752

Receptacle, Wire-to-Wire, 58 Position, .137 in [3.5 mm] Centerline, Sealable, Blue, Wire & Cable, Power & Signal, LEAVYSEAL



By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English