

#### Nano MQS

TE Internal #: 2282154-1 Housing for Female Terminals, Wire-to-Wire / Wire-to-Board, 6 Position, .07 in [1.8 mm] Centerline, Black, Wire & Cable, Signal, Nano MQS

#### View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > MQS, CONNECTOR HOUSING



Connector System: Wire-to-Board, Wire-to-Wire

Number of Positions: 6

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 1.8 mm [.07 in ]

Sealable: No

#### All MQS, CONNECTOR HOUSING (438)

**E** 

### Features

Prod	luct <sup>-</sup>	Features	5
			-

Mixed & Hybrid Connector	No		
Connector Shape	Rectangular		
Connector System	Wire-to-Board, Wire-to-Wire		
Connector & Housing Type	Housing for Female Terminals		
Sealable	No		
Connector & Contact Terminates To	Wire & Cable		
Primary Locking Feature	On the Terminal		
Configuration Features			
Number of Positions	6		
Number of Rows	1		
Electrical Characteristics			
Nominal Voltage Architecture	12 V, 24 V		

Housing for Female Terminals, Wire-to-Wire / Wire-to-Board, 6 Position, .07 in [1.8 mm] Centerline, Black, Wire & Cable, Signal, Nano MQS



## **Body Features**

Cable Exit Angle	180°			
Primary Product Color	Black			
Connector & Keying Code	A			
Contact Features				
Contact Size	.5mm			
Contact Type	Receptacle			
Mating Tab Width	.5 mm[.02 in]			
Contact Current Rating (Max)	3 A			
Mechanical Attachment				
Terminal Position Assurance	No			
Strain Relief	Without			
Mating Alignment Type	Keyed			
Mating Alignment	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			
Housing Features				

Housing Material

PBT GF

## 1.8 mm[.07 in]

#### Dimensions

Connector Height	5 mm[.196 in]			
Product Width	16.45 mm[.647 in]			
Product Length	16.78 mm[.66 in]			
Usage Conditions				
Operating Temperature (Max)	105 °C[221 °F]			
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]			
Operation/Application				
Circuit Application	Signal			
Packaging Features				
Packaging Quantity	7000			
Packaging Method	Box			
Other				
Serviceable	No			

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire / Wire-to-Board, 6 Position, .07 in [1.8 mm] Centerline, Black, Wire & Cable, Signal, Nano MQS



Connector Position Assurance Capable

No

#### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**



# Also in the Series | Nano MQS

Housing for Female Terminals, Wire-to-Wire / Wire-to-Board, 6 Position, .07 in [1.8 mm] Centerline, Black, Wire & Cable, Signal, Nano MQS



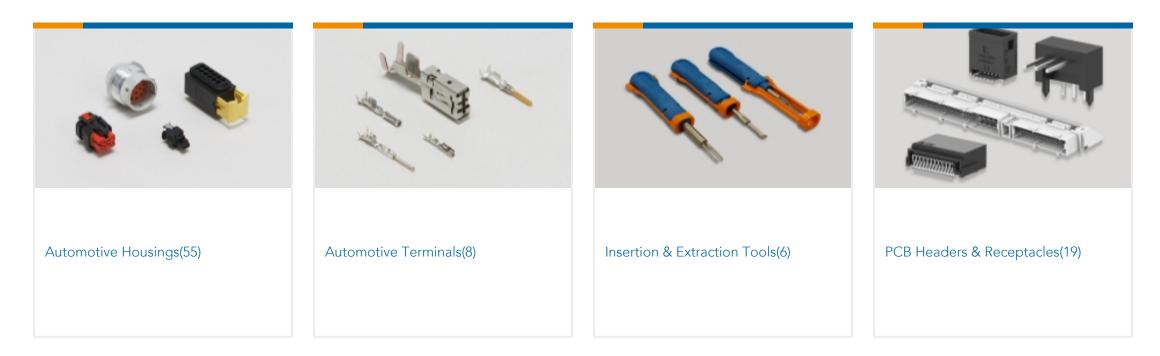

# Customers Also Bought



1PORT,MATENET,REC HSG,SLD,COD A,UTP,ASSY	12POS,NANOMQS,REC HSG ASSY, COD A	6 PORT PLUG,MATENET,HDR HSG, COD Z	2POS, MCON 1.2 LL REC SEALED

TE Part #2306914-3 14POS,HYBRID,REC HSG ASSY, UNSLD,COD 3

### Documents

Product Drawings 6POS,NANOMQS,REC HSG,CODA

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2282154-1\_A.2d\_dxf.zip

Housing for Female Terminals, Wire-to-Wire / Wire-to-Board, 6 Position, .07 in [1.8 mm] Centerline, Black, Wire & Cable, Signal, Nano MQS



English

Customer View Model ENG\_CVM\_CVM\_2282154-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2282154-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Micro Quadlok Interconnection System (MQS)

English

Product Specifications Application Specification

English