


RoHS Compliant

UC-268/UC-265

uPCI 4xRS232

"SERIAL CARDS ENGINEERED TO EXCEED EXPECTATIONS"

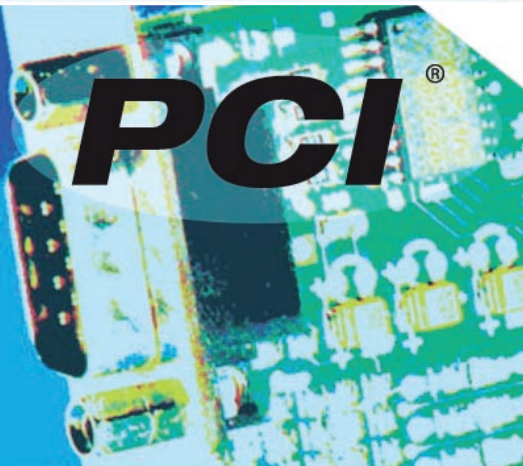

Description

Universal PCI card provides 4 industry standard RS232 serial COM ports in a single PCI slot, supplied with 9 pin cable.

Universal PCI is fully compatible with both 3.3Volt and 5Volt PCI slots.

With Brainboxes industry renowned Lifetime Warranty and Lifetime Support!

Features

- 4 port RS232
- PCI 3.0
- 64 Byte Tx and 64 Byte Rx FIFOs
- Up to 115,200 Baud
- DB9 connector (9 Pin Male)
- Drivers for all popular operating systems
- Sample Programs, Test & Terminal software
- Lifetime Support
- Lifetime Warranty (registration required)

Software

Microsoft signed drivers (easy installation & robust operation) for:

- Windows Server 2008 32 bit & 64 bit Editions
- Windows Vista 32 bit and 64 bit editions
- Windows Server 2003 32 bit & 64 bit Editions
- Windows XP 32 bit & 64 bit editions



As well as: full product documentation, a thorough troubleshooting guide and terminal software. Detailed sample source code for many popular programming languages. Further OS support on next page.



Options



UC-268:
uPCI 4xRS232



UC-265
uPCI 4xRS232 DB25

ORDER

Description
uPCI 4xRS232
uPCI 4xRS232 DB25

Code
UC-268
UC-265



uPCI 4xRS232

UC-268/UC-265: Full Specification

<p>Port</p> <table border="1"> <tr><td>Pin 1</td><td>DCD</td></tr> <tr><td>Pin 2</td><td>RXD</td></tr> <tr><td>Pin 3</td><td>TXD</td></tr> <tr><td>Pin 4</td><td>DTR</td></tr> <tr><td>Pin 5</td><td>GND</td></tr> <tr><td>Pin 6</td><td>DSR</td></tr> <tr><td>Pin 7</td><td>RTS</td></tr> <tr><td>Pin 8</td><td>CTS</td></tr> <tr><td>Pin 9</td><td>RI</td></tr> </table>	Pin 1	DCD	Pin 2	RXD	Pin 3	TXD	Pin 4	DTR	Pin 5	GND	Pin 6	DSR	Pin 7	RTS	Pin 8	CTS	Pin 9	RI	<p>Ports</p> <p>Connector</p> <p>FIFO size</p> <p>Operating Distance</p> <p>Cable</p>	<p>4 x RS232</p> <p>DB9 connector (9 Pin Male)</p> <p>64 RX FIFO + 64 TX FIFO</p> <p>EIA - RS232 Standard</p> <p>37 WAY D TO: 4 x DB9 (9 Pin Male)</p>
Pin 1	DCD																			
Pin 2	RXD																			
Pin 3	TXD																			
Pin 4	DTR																			
Pin 5	GND																			
Pin 6	DSR																			
Pin 7	RTS																			
Pin 8	CTS																			
Pin 9	RI																			
<p>Port Settings</p> <p>115,200 baud</p>	<p>Baud Rate</p> <p>Data Bits</p> <p>Parity</p> <p>Stop Bits</p> <p>Flow Control</p> <p>Tx/Rx Modes</p>	<p>115,200</p> <p>5,6,7 or 8</p> <p>Odd, Even, None, Mark or Space</p> <p>1, 1.5 or 2</p> <p>RTS/CTS DSR/DTR XON/XOFF</p> <p>Point to Point</p>																		
<p>Interface</p>	<p>OS Compatibility</p> <p>BUS</p>	<p>Windows Server 2008 32 bit & 64 bit Editions Windows Vista 32 bit & 64 bit Editions Windows Server 2003 32 bit & 64 bit Editions Windows XP 32 bit & 64 bit Editions Microsoft Windows ME</p> <p>PCI 3.0 : Peripheral Component Interface</p>																		
<p>Approvals</p>	<p>Other Approvals</p> <p>Microsoft Approvals</p>	<p>WEEE RoHS FCC Compliant EMC: CE</p> <p>Microsoft Certified Gold Partner</p>																		
<p>General</p>	<p>PCB Layers</p> <p>Power Consumption</p> <p>Weight</p> <p>Size</p>	<p>4</p> <p>210mA @ 5V, 60mA @ 12V</p> <p>0.073 Kg</p> <p>125x20x120 mm</p>																		
<p>Box Content</p>	<p>Packaging</p> <p>Card</p>	<p>Installation CD including manual, Microsoft signed drivers & utilities</p> <p>uPCI 4xRS232 / uPCI 4xRS232 DB25</p> <p>37 WAY D TO: 4 x DB9 (9 Pin Male)</p>																		
<p>Product Support</p>	<p>Warranty</p> <p>Support</p>	<p>Lifetime (online registration required)</p> <p>Lifetime Web, Email and Phone Support from fully qualified, friendly staff who work in and alongside the Product Development Team</p>																		
<p>Additional</p>	<p>OEM option</p> <p>Made In</p> <p>Customisable</p>	<p>Available for bulk buy OEM</p> <p>Manufactured in the UK by Brainboxes Winner 2005 European Electronics Industry Awards "Manufacturer of the Year"</p> <p>Brainboxes operate a "Perfect Fit Custom Design" policy for volume users. More Info: sales@brainboxes.com</p>																		