


Meets ANSI/ESD S20.20 and Grounding standard ANSI/ESD S6.1

- A. 10mm (.395") snap stud (male) to ground work surface.
- B. Molded in black thermoplastic elastomer.
- C. Ring terminal, .200" ID, (#10).
- D. Extra ring terminal included for customizing length.
- E. 1 megohm resistor between the snap and ground, with banana jacks at ground potential.
- F. Wire is autosplice crimped to secure it inside of the mold.
- G. High flex strand copper, 20 gauge, with black PVC insulated jacket OD = .100"
- H. Dual banana jacks at ground potential (.162" - .164" ± .002" ID).
- I. Desco and ground symbol molded into the plastic.
- J. Date coded to show month and year of manufacture. Arrow points to month of manufacture (12:00 = December), numerals indicate the year (03=2003).
- K. Universal Snap Mounting Kit includes a 10mm stud, 10mm socket, threaded backing washer, conical nut, long screw, short screw, and ESD common point ground label. Screws are 6-32 Flat Head Philips machine screws; one 1/4" long and one 3/8" long.

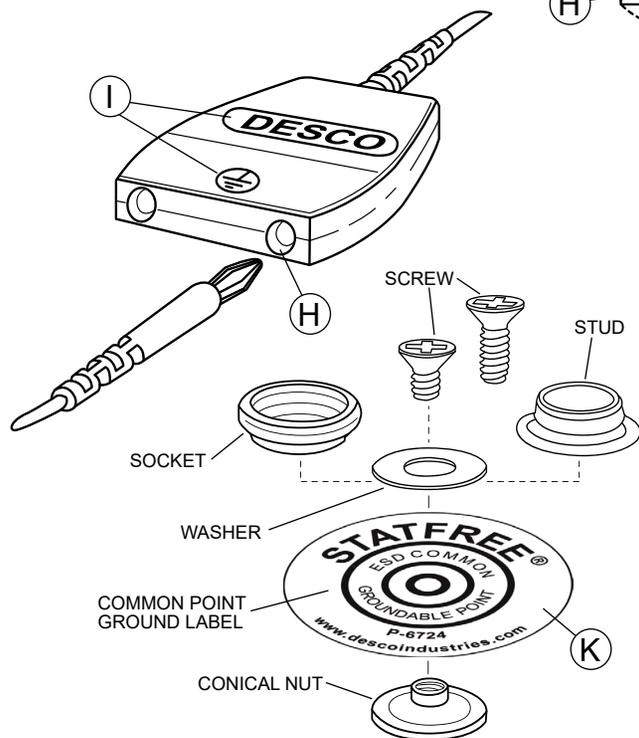

Made in the United States of America

COMMON POINT GROUND CORD KIT FOR WORKMAT, W/RESISTOR, 10MM STUD, 15' CORD W/RING TERMINAL

Specifications and procedures subject to change without notice.



DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com
 PHONE (909) 627-8178
 DESC0 EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
 PHONE (781) 821-8370

DRAWING NUMBER
14213

DATE:
March 2024