

Standard MOV Varistor

Round, 10mm

multicompPRO

**RoHS
Compliant**



Description

Metal Oxide Varistor (MOV) as one nonlinear resistance element is mainly made of zinc oxide (ZnO), which has very high surge capacity and big nonlinear coefficient. Below the threshold voltage, its resistance is very high, nearly no current flows through, but above the threshold voltage, the resistance reduces sharply, huge current can be discharged. Due to this characteristic, varistor as a protection component in electronic and electrical equipment can absorb abnormal over-voltage and lightning surge. Varistor is with High Surge Current Density, Low Clamping Voltage, and Good Surge Capacity.


Applications

- Power Supplies
- Home Electrical Appliances
- Industrial Devices
- Surge Protectors
- Telecom Devices


Features

- Epoxy Resin Coating
- Silicone Resin Coating
- Low Leakage Current
- Bidirectional and Symmetrical V/I Characteristics
- Operating Temperature Range
- Low Temperature: -40°C
- High Temperature: +85°C to +105°C

Product Structure

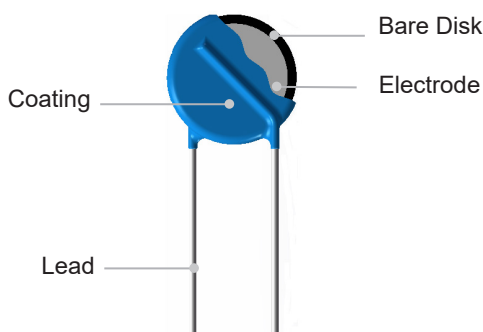

Temp. Derating Curve

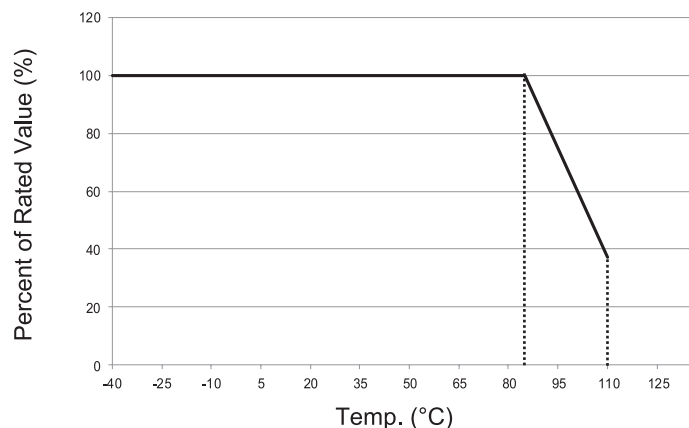

For Normal Temp. Series

Note:

When ambient Temp. exceeds 85°C, the peak surge current and energy rating should be reduced as shown in the left curve.

Standard MOV Varistor

Round, 10mm

multicompPRO


General Technical Data

Item	Value	Unit
Operating Temperature	-40 to +85	°C
Storage Temperature	-40 to +125	°C
Voltage Proof	≥2500	Vac
Insulation Resistance	≥100	MΩ

Dimensions

Model	L (Min.)	H (Max.)	T (Max.)	D (Max.)	d	F	F1	A (Max.)
MPV10D101KNK	20	15.5	4.6	12.5	0.8 ±0.05	7.5 ±0.6	1.3 - 2.8	17.5
MPV10D121KNK			4.8				1.4 - 3	
MPV10D181KNK			4.4				1.2 - 2.7	
MPV10D201KNK			4.6				1.3 - 2.9	
MPV10D241KNK			4.8				1.4 - 3.1	
MPV10D271KNK			4.9				1.5 - 3.2	
MPV10D361KNK			5.4				1.9 - 3.7	
MPV10D391KNK			5.6				2 - 3.9	
MPV10D431KNK			5.8				2.1 - 4.1	
MPV10D471KNK			6.1				2.3 - 4.3	
MPV10D511KNK			6.3				2.5 - 4.5	
MPV10D561KNK			6.6				2.7 - 4.7	
MPV10D621KNK			6.9				3.1 - 5.1	
MPV10D681KNK			7.2				3.4 - 5.4	
MPV10D751KNK			7.6				3.7 - 5.7	
MPV10D820KNK			4.4				1.2 - 2.6	
MPV10D821KNK			8				4.1 - 6.1	
MPV10D911KNK			8.5				4.6 - 6.6	

Diagram



Standard MOV Varistor

Round, 10mm

multicompPRO


Specification

Model	Max. Continuous Operating Voltage		Varistor Voltage @1 mA DC		Clamping Voltage (Max.)		Max. Peak Current (1 time, 8/20 μs)	Max. Energy (10/1000 μs)	Typical Capacitance (For reference only) @1 kHz	Agency Approvals			
	Vac	Vdc	Min.	Max.	VC	IP	K		(pF)				
	(V)	(V)	(V)	(V)	(V)	(V)	(kA)	(J)		UL	cUL	TUV	CQC
MPV10D101KNK	60	85	90	110	165	25	3.5	17	1000	•	•	•	•
MPV10D121KNK	75	100	108	132	200			20	830				
MPV10D181KNK	115	150	162	198	300			30	560				
MPV10D201KNK	130	170	180	220	340			35	500				
MPV10D241KNK	150	200	216	264	395			42	420				
MPV10D271KNK	175	225	243	297	455			49	370				
MPV10D361KNK	230	300	324	396	595			65	280				
MPV10D391KNK	250	320	351	429	650			70	260				
MPV10D431KNK	275	350	387	473	710			80	230				
MPV10D471KNK	300	385	423	517	775			85	210				
MPV10D511KNK	320	415	459	561	845			90	200				
MPV10D561KNK	350	460	504	616	925			92	180				
MPV10D621KNK	385	505	558	682	1025			95	160				
MPV10D681KNK	420	560	612	748	1120			98	150				
MPV10D751KNK	460	615	675	825	1240			100	130				
MPV10D820KNK	50	65	74	90	135			14	1200				
MPV10D821KNK	510	670	738	902	1355			110	120				
MPV10D911KNK	550	745	819	1001	1500			130	110				

• : Approved ○ : Unauthorized

Performance Curve

Max. Peak Current Derating Curves

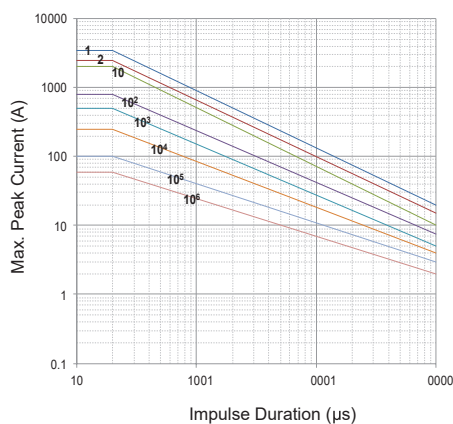

MP011853



Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO

Standard MOV Varistor

Round, 10mm

multicompPRO

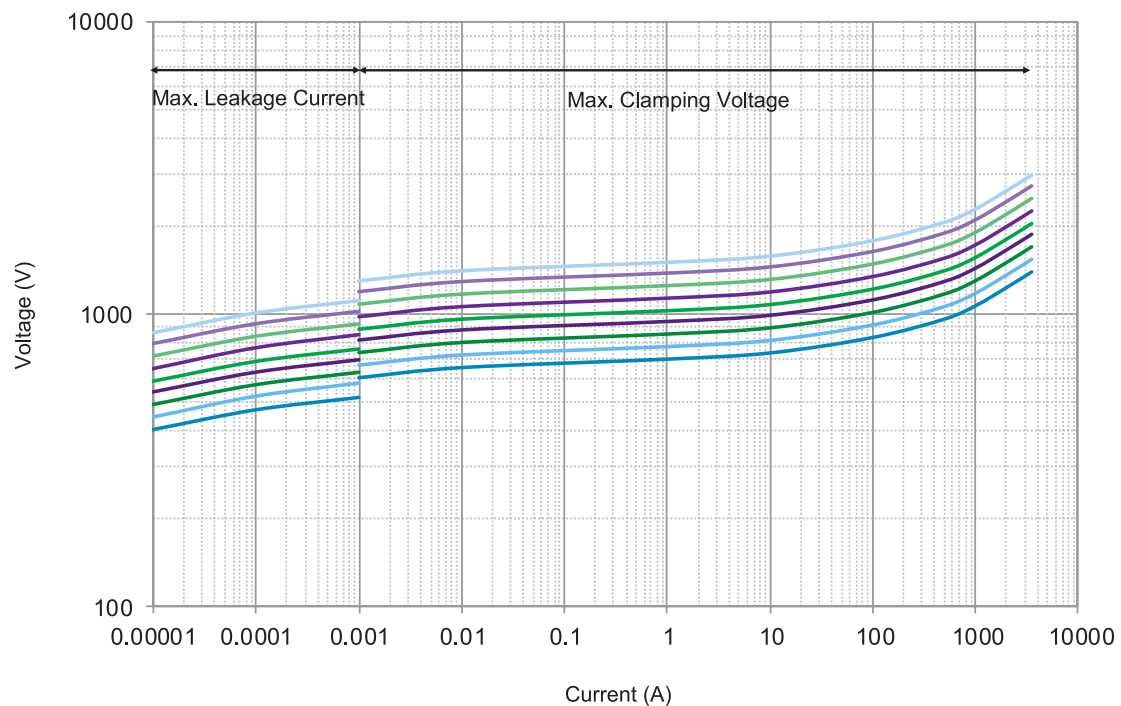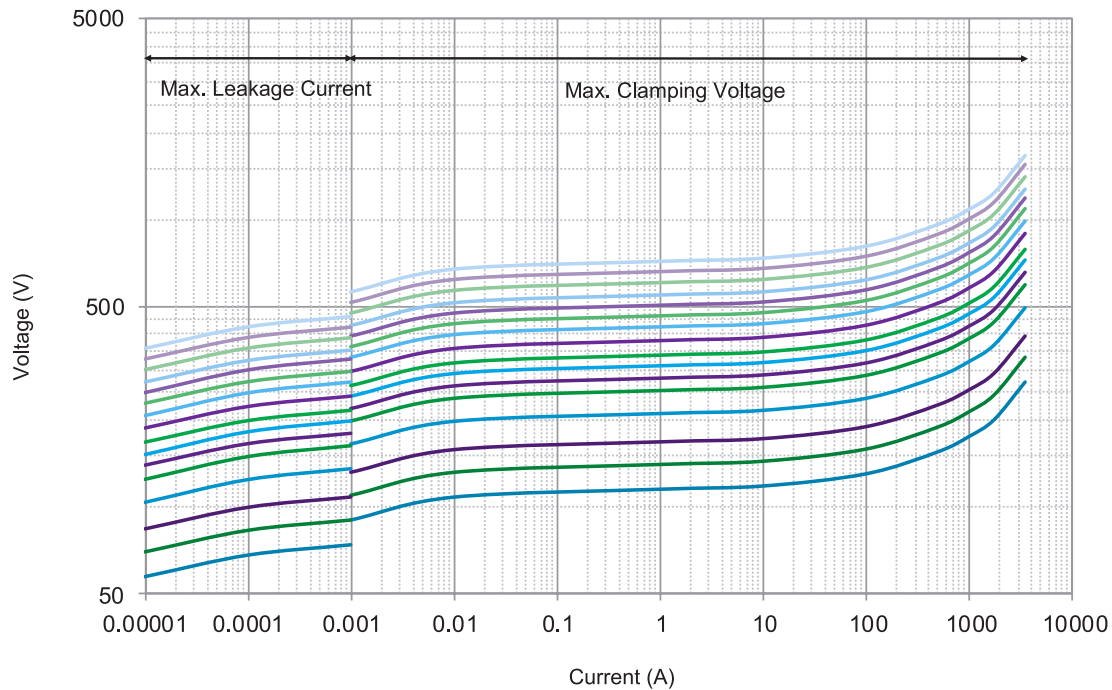

multicompPRO

Standard MOV Varistor

Round, 10mm

multicompPRO

Part Number Table

Description	Part Number
Varistor, 100V	MPV10D101KNK
Varistor, 120V	MPV10D121KNK
Varistor, 180V	MPV10D181KNK
Varistor, 200V	MPV10D201KNK
Varistor, 240V	MPV10D241KNK
Varistor, 270V	MPV10D271KNK
Varistor, 360V	MPV10D361KNK
Varistor, 390V	MPV10D391KNK
Varistor, 430V	MPV10D431KNK
Varistor, 470V	MPV10D471KNK
Varistor, 510V	MPV10D511KNK
Varistor, 560V	MPV10D561KNK
Varistor, 620V	MPV10D621KNK
Varistor, 680V	MPV10D681KNK
Varistor, 750V	MPV10D751KNK
Varistor, 82V	MPV10D820KNK
Varistor, 820V	MPV10D821KNK
Varistor, 910V	MPV10D911KNK

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO