

Electrical / Optical Characteristics at Ta = 25°C





Parameter	Symbol	Min.	TYP PUR/XG	Max.	Unit	Test
Luminous Intensity	IV	30/35	35/45	45/60	mcd	IF = 20mA
Viewing Angle	2θ1/2		50		deg	
Peak Emission Wavelength	λp		587/570		nm	
Dominant Wavelength	λD		590/571		nm	
Spectral Line Half-Width	Δλ		35/30		nm	
Forward Voltage	VF	1.8/1.8	2.1/2	2.6/2.5	V	
Power Dissipation	Pd	-	-	85	mW	
Peak Forward Current (Duty1/10 @ 1KHZ)	IF (Peak)			100	mA	
Recommended Operating Current	IF (Rec)		20		mA	


Absolute Maximum Ratings: (Ta = 25°C)

Reverse Voltage : 5V
 Reverse Current : 10 uA (VR=5V)
 Operating Temperature Range : -40°C to 85°C
 Storage Temperature Range : -40°C to 100°C
 Lead Soldering Temperature Range : 260°C For 5 Seconds
 (1.6 mm (1/16 inch) from body)

Typical Electro-Optical Characteristics Curves



Yellow (GaAsP/GaP λP=587nm)



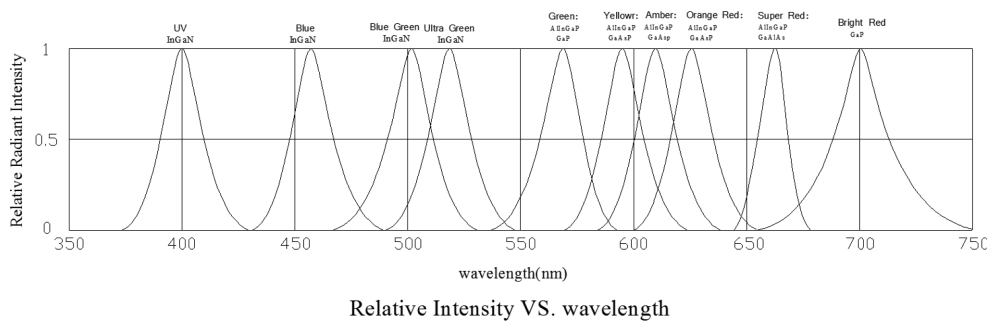

Typical Electro-Optical Characteristics Curves

Green (AlInGaP $\lambda_P=570\text{nm}$)

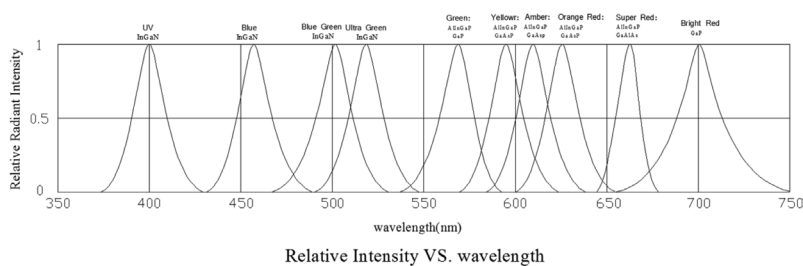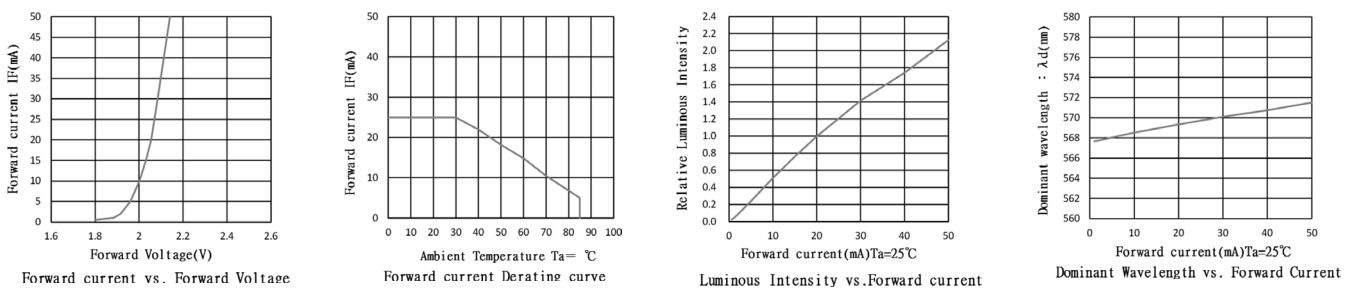



Soldering Iron

Temperature at tip of iron : 350°C Max.


Soldering Time: 3 sec. \pm 1 sec. (one time only)

If temperature is higher, time should be shorter


Soldering heat (DIP)

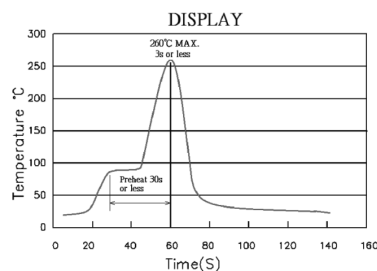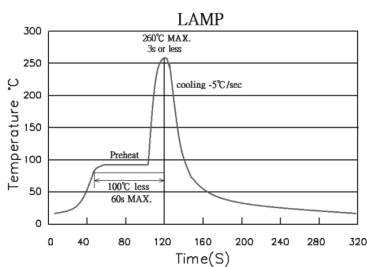

Reflow Temp./Time(SMD)

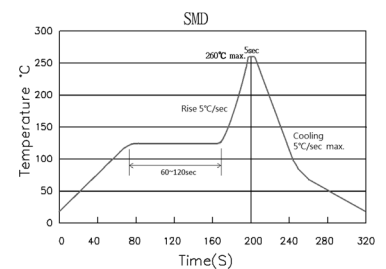

Diagram

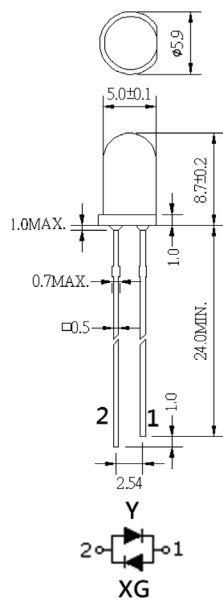

Part Number Table

Description	Part Number
Multicolor LED, Bipolar, Yellow and Green, 5mm	L056YXGW

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro