
МацогУ Mallory Sonalert Products, Inc.				Part #: JTC028-RY-CSL		
Sales Outline Drawing				Revision	evisic A	
Specifications:						
Stack Number:	1	2				
LED Color:	RED	YELLOW				
LED Operation:	Continuous	Continuous				
Connection Wires:	Red and Brown	Yellow and Brown				
LED Current Draw:	<50 mA	<60 mA				
Rated Voltage:	24 VAC/DC					
Operating Voltage:	20-28 VAC/DC					
Sound Level Category:	Loud	Loud	Loud		Loud	
Mode of Operation:	Continuous	Medium Pulse (5PPS)	Double Pulse (0.5F	PPS)	Continuous for 5 sec then 0.1s beep until reset	
Connection:	-	Black and Gray Wires;	Black and Gray Wires;		Black and Gray wires; Orange	
		Orange wire connected	Purple wire connect	ed to	and Purple wires connected to	
		to Green/Yellow wire	Green/Yellow wire		Green/Yellow wire	
Sound Current Draw:	40mA Max.	40mA Max.	40mA Max.	40mA Max.		
Loudness @ 1m:	80-85 dB(A) Typ.					
Frequency:	2000 ± 500 Hz					
Total Max Current:	<150mA with all LED's and sound unit working					
Operating Temperature:	-25° ~ +60°C					
Lens Color:	Transparent - matching LED stack color					
Material:	Lexan CFR7431					
Mounting Method:	Stainless Steel Pole					
Weight Typical (g):	685					
NEMA 12:	Approved					
Options:	Please contact factory.					

Dimensions: Inches (mm) CUL Recognized CE Certified

ROHS Compliant

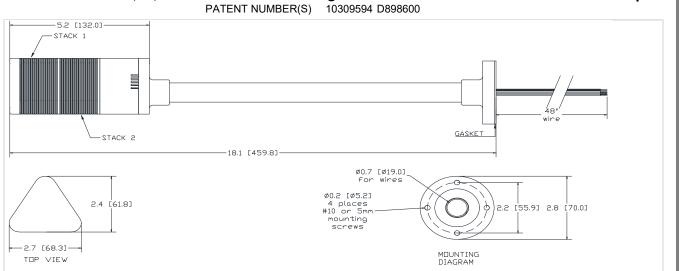

LED OPERATION: CONNECT STACK COLOR WIRE TO POWER AND BROWN WIRE TO POWER.

SOUND OPERATION: CONNECT GRAY AND BLACK WIRES TO POWER FOR CONTINUOUS SOUND.

FOR MEDIUM PULSE, CONNECT GRAY & BLACK TO POWER AND ORANGE WIRE TO GREEN/YELLOW WIRE. FOR DOUBLE PULSE, CONNECT GRAY & BLACK TO POWER AND PURPLE WIRE TO GREEN/YELLOW WIRE. FOR CONT/BEEP, CONNECT GRAY & BLACK TO POWER AND ORANGE & PURPLE TO GREEN/YELLOW WIRE.