

Thermal Link Fuses

DC Alloy

multicompPRO

**RoHS
Compliant**



Description

DC Alloy Thermal-Link is defined as a non-resettable protective device functioning one time only. It is widely used in electrical equipment and electric vehicle. Normally, thermal element is jointed to the two electrode leads. Under abnormal conditions, when the temp. reaches to the fusing temp. of Thermal-Link, the thermal element melts to disconnect the circuit completely and quickly retracts to the two electrode lead ends with the aid of the flux

Approvals

UL60691
TUV EN 60691

Features

- 0 to 450V DC / 0 to 600V AC Operating Voltage
- High Accuracy of Functioning Temp.
- Ceramic Case
- Non-Resettable


Applications

- Battery Cooling Systems
- Precharged Resistors
- Automotive Air-Conditioners
- Heaters

Customization

- Rated Functioning Temp.
- The Shape of Electrode Leads

Structure Diagram

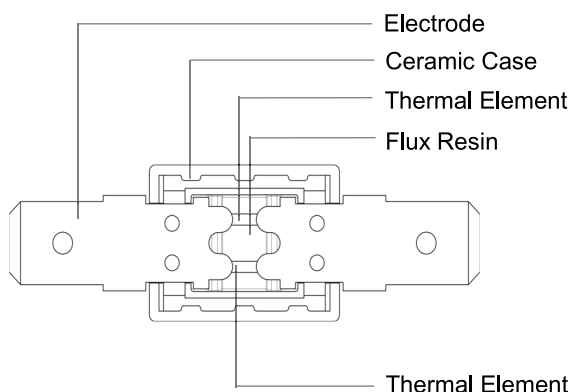

Thermal Link Fuses


DC Alloy

multicompPRO

Glossary

Item	Description
TCO	Thermal-Link A non-resettable device incorporating a thermal element which will open a circuit once only when exposed for a sufficient length of time to a temp. in excess of that for which it has been designed.
ATCO	Alloy Thermal-Link Alloy type Thermal-Link, Alloy is thermal element.
DC-ATCO	DC-Alloy Thermal-Link Direct Current Alloy Thermal-Link.
T_r	Rated Functioning Temp. The temperature of the Thermal-Link which causes it to change the state of conductivity with a detection current up to 10 mA as the only load. Tolerance: T _r 0 / -10°C (GB 9816, EN 60691, K60691). Tolerance: T _r ± 7°C (J60691).
Fusing Temp.	Fusing Temp. The temperature of the Thermal-Link which causes it to change its state of conductivity is measured with silicone oil bath in which the temperature is increased at the rate of 0.5 °C to 1 °C / minute, with a detection current up to 10 mA as the only load
T_h	Holding Temp. The Maximum temperature at which a Thermal-Link will not change its state of conductivity when conducting rated current for 168 hours.
T_m	Maximum Temp. Limit The temperature of the Thermal-Link stated by the manufacturer, up to which the mechanical and electrical properties of the Thermal-Link having changed its state of conductivity, will not be impaired for a given time.
I_{min}	Minimum Breaking Current The minimum current that Fuse requires after the Alloy of Thermal-Link opens in the circuit.
I_r	Rated Current The current used to classify a Thermal-Link, which is the maximum current that Thermal-Link allows to carry and is able to cut off the circuit safely.
U_r	Rated Voltage The voltage used to classify a Thermal-Link, which is the maximum voltage that Thermal-link allows to carry and is able to cut off the circuit safely.

Diagram

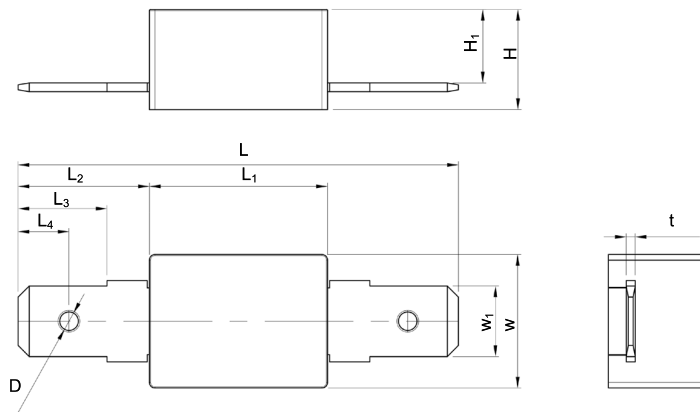

Dimensions : Millimetres

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO

Thermal Link Fuses

DC Alloy

multicompPRO

L	L1	L2	L3	L4	W	W1	H	H1	t	D
39.5 ±2	16 ±1	11.75 ±0.3	7.95 ±0.3	4.55 ±0.2	12 ±1	6.35 ±0.2	9 ^{+0.5} _{-0.0}	6 ⁺¹ ₋₀	0.8 ±0.05	1.65 ±0.2


Specification Table

For Automotive Application: Battery Cooling System, Pre-charged Resistor, Automotive Air Conditioning

Part Number	T _f	Fusing Temp.	T _h	T _m	I _{min}	I _r	U _r
	(°C)	(°C)	(°C)	(°C)	(A)	(A)	(V)
MPATCO-TG102C-HQZ	102	97 ±5	65	250	0	15	DC 450
MPATCO-TG115C-HQZ	115	110 ±5	72			20	DC 400
MPATCO-TG115C-JPZ			70				DC 450
MPATCO-TG125C-HQZ	125	120 ±5	85			15	DC 450
MPATCO-TG125C-JPZ			85			20	DC 400
MPATCO-TG136C-HQZ	136	131 ±5	90			15	DC 450
MPATCO-TG136C-JPZ			90			20	DC 400
MPATCO-TG150C-HQZ	150	145 ± 5	100			15	DC 450
MPATCO-TG86C-HQZ	86	81 ±5	43				DC 450
MPATCO-TG86C-HSZ			43				DC 600

Temp.-Time Curve

The functioning temperature time curve of Alloy Thermal-Link in different Temp. oil bath.

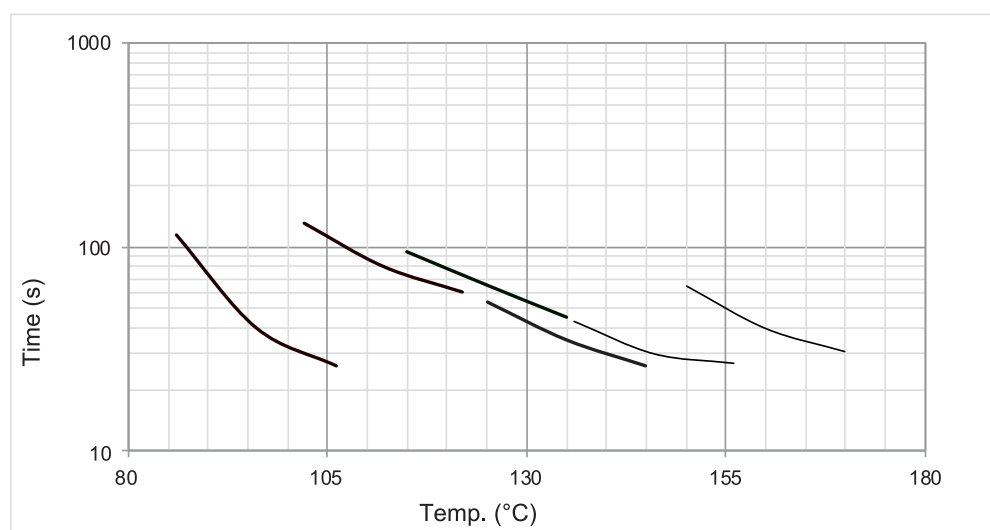


Thermal Link Fuses

DC Alloy

multicompPRO

Current-Time Curve

This is an illustrated curve, describing the opening time at Multi-times rated current in the condition of the room Temp. 25°C.

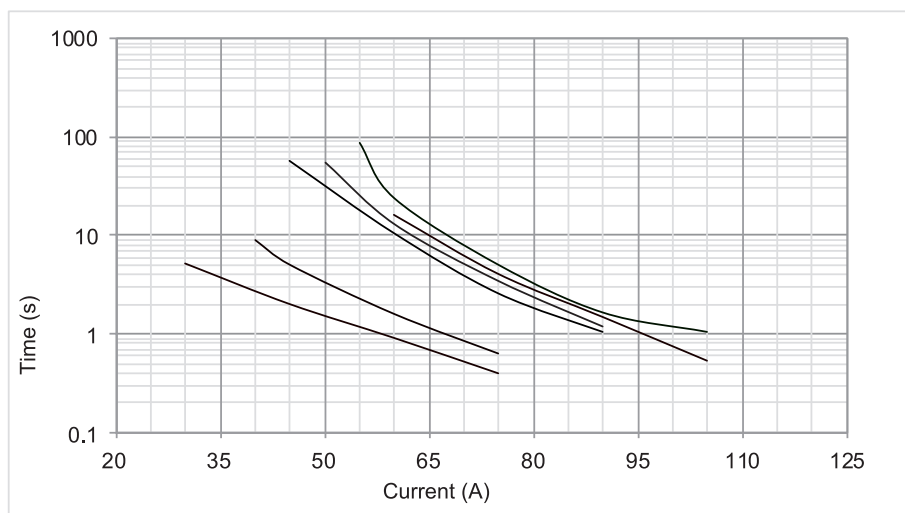

Part Number Table

Description	Part Number
Direct Current Alloy Thermal-Link , 15A, 450V DC	MPATCO-TG102C-HQZ
Direct Current Alloy Thermal-Link , 15A, 450V DC	MPATCO-TG115C-HQZ
Direct Current Alloy Thermal-Link , 20A, 400V DC	MPATCO-TG115C-JPZ
Direct Current Alloy Thermal-Link , 15A, 450V DC	MPATCO-TG125C-HQZ
Direct Current Alloy Thermal-Link , 20A, 400V DC	MPATCO-TG125C-JPZ
Direct Current Alloy Thermal-Link , 15A, 450V DC	MPATCO-TG136C-HQZ
Direct Current Alloy Thermal-Link , 20A, 400V DC	MPATCO-TG136C-JPZ
Direct Current Alloy Thermal-Link , 15A, 450V DC	MPATCO-TG150C-HQZ
Direct Current Alloy Thermal-Link , 15A, 450V DC	MPATCO-TG86C-HQZ
Direct Current Alloy Thermal-Link , 15A, 600V DC	MPATCO-TG86C-HSZ

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO