

## AMP | LEAVYSEAL TE Internal #: 1-2112231-1 Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 46 Position, 4 mm [.157 in] Centerline, Sealable, Black, Wire & Cable, Power, LEAVYSEAL

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > LEAVYSEAL Connector Housings



Connector System: Wire-to-Board, Wire-to-Device

Number of Positions: 46

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4 mm [.157 in ]

Sealable: Yes

All LEAVYSEAL Connector Housings (64)

#### Features

#### Product Type Features

Mixed & Hybrid Connector

Connector Shape	Rectangular	
Connector System	Wire-to-Board, Wire-to-Device	
Connector & Housing Type	Housing for Female Terminals	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Primary Locking Feature	On the Terminal	
Configuration Features		
Number of Positions	46	
Number of Rows	3	
Electrical Characteristics		
Operating Voltage	36 VDC	
Body Features		
Cable Exit Angle	90°	
Primary Product Color	Black	
Connector & Keying Code	A	

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 46 Position, 4 mm [. 157 in] Centerline, Sealable, Black, Wire & Cable, Power, LEAVYSEAL



#### **Contact Features**

Contact Size	1.5K
Contact Type	Receptacle
Mating Tab Width	1.6 mm[.063 in]
Contact Current Rating (Max)	20 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	With
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF20
Centerline (Pitch)	4 mm[.157 in]
Dimensions	
Connector Height	36.4 mm[1.433 in]
Product Width	43.5 mm[1.713 in]
Product Length	104 mm[4.095 in]
Row-to-Row Spacing	6 mm[.236 in]
Usage Conditions	
Operating Temperature (Max)	120 °C[248 °F]
Operating Temperature Range	-30 – 120 °C[-22 – 248 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
IP Rating	IP67
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	159
Packaging Method	Box
Other	

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 46 Position, 4 mm [. 157 in] Centerline, Sealable, Black, Wire & Cable, Power, LEAVYSEAL



Serviceable	Yes
Connector Position Assurance Capable	No
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




Also in the Series | LEAVYSEAL

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 46 Position, 4 mm [. 157 in] Centerline, Sealable, Black, Wire & Cable, Power, LEAVYSEAL





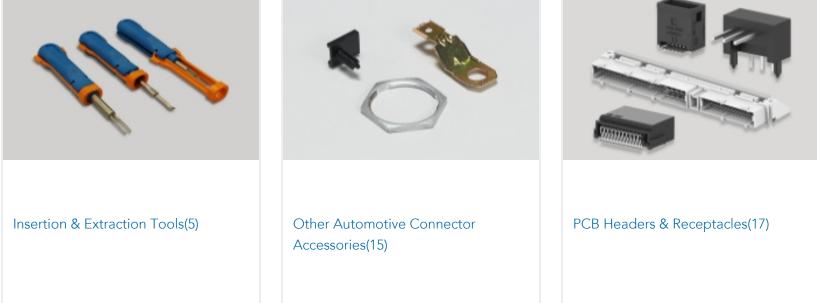

# Customers Also Bought



TE Part #9-1394050-1	TE Part #1554461-2	TE Part #4-968972-1	TE Part #1456987-1
LEAVYSEAL Connector Backshells	33POS,1.0 SERIES,REC HSG ASSY,SLD	MCP2,8 GEH ASSY 12P	2x4 Fem unsealed LP assy Key A
TE Part #1-2331102-1	TE Part #2112046-2	TE Part #2112452-2	TE Part #2359943-1
TAB HEADER 46POS.	COVER,90,FOR 26POS	COVER,FOR 22POS	96POS,MCON-1.2 CB,REC HSG,ASSY



### Documents

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 46 Position, 4 mm [. 157 in] Centerline, Sealable, Black, Wire & Cable, Power, LEAVYSEAL



# Product Drawings

46POS, AMP MCP1.5K, REC HSG, ASSY

English

#### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_1-2112231-1\_B.2d\_dxf.zip

English

**3D PDF** 3D

Customer View Model ENG\_CVM\_CVM\_1-2112231-1\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-2112231-1\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages LEAVYSEAL CONNECTORS

English

ICT Terminals and Connectors Catalogue

English

**Product Specifications** 

#### Application Specification

German