



SD 7.0 Specification

(Fx Premium, 3D TLC)

Version 1.0

Address: 28 Genting Lane, #09-03/04/05 Platinum 28, Singapore 349585

Tel : +65-6493 5035

Fax : +65-6493 5037

Website: <http://www.flexxon.com>

Email: flexxon@flexxon.com

ALL RIGHTS ARE STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSLATED TO ANY OTHER FORMS WITHOUT PERMISSION FROM FLEXXON.

Table of Contents

1.	General Description.....	3
1.1.	Introduction.....	3
1.2.	Product Overview	4
2.	Product Specifications.....	5
2.1.	Performance	5
2.2.	Power	5
2.3.	MTBF.....	5
2.4.	Data Retention.....	5
3.	Environmental Specifications	6
4.	Electrical Specifications	7
4.1.	DC Characteristics	7
4.1.1.	Bus Operation Conditions.....	7
4.1.2.	Bus Operation Conditions for PCIe	8
4.1.3.	Bus Signal Line Load.....	8
4.1.4.	Power Up Time of Host	9
4.1.5.	Power Up Time of Card.....	10
4.2.	AC Characteristic.....	10
4.2.1.	SD Interface timing (Default)	11
4.2.2.	SD Interface Timing (High-Speed Mode).....	12
4.2.3.	SD Interface timing (SDR12, SDR25, SDR50 and SDR104 Modes)	13
4.2.4.	SD Interface timing (DDR50 Mode)	15
5.	Pad Assignment.....	17
5.1.	Pad Assignment and Descriptions.....	17
5.2.	PCIe Bus	18
6.	Registers	19
6.1.	Card Register.....	19
7.	Physical Dimension	20
8.	Ordering Information.....	23

1. GENERAL DESCRIPTION



1.1. Introduction

Fx Premium SD 7.0 card comes with 17-pin interface, designed to operate at PCIe interface with a maximum throughput (logical/ Idea performance) to 985MB/s (Gen3x1 Lane). It can alternate communication protocol between the SD Express mode, SD mode and SPI mode. Backward compatible with UHS-I hosts.

Fx Premium SD 7.0 card is the first SD card implements PCIe/NVMe interface and protocol. It is the slimmest SSD like storage device with maximum speed of 985MB/s. It is designed for those applications that need extreme high performance like burst mode photo shooting, 8K 10K video recording, mobile devices, VR/AR, drones, gaming application, data-intense wireless communication, mobile computing devices, multi-channel IoT devices and automotive storage.

FLEXXON CONFIDENTIAL

1.2. Product Overview

- ❖ **Flash**
 - 3D TLC
- ❖ **Capacity**
 - 128GB up to 256GB
- ❖ **Support SD SPI mode**
- ❖ **Non-Copyrights Protection Mechanism**
- ❖ **Card removal during read operation will never harm the content**
- ❖ **Password Protection of cards (optional)**
- ❖ **Designed for read intensive and write intensive cards**
- ❖ **Write Protect feature using mechanical switch**
- ❖ **Built-in write protection features (permanent and temporary) (SD mode only)**
- ❖ **Write Protect feature using mechanical switch (Full SD Card only)**
- ❖ **Operation voltage range:**
 - VDD1: 2.7V~3.6V, VDD2: 1.70V~1.95V
- ❖ **Temperature Range**
 - Operation: -25°C ~ 85°C
 - Storage: -40°C ~ 85°C
- ❖ **RoHS Compliant**
- ❖ **Bus Speed Mode (use PCIe Differential Interface Lines)**
 - PCIe with Gen 3 x 1 Lan – Up to 985MB/s
 - Gen3 x1 bus, two differential I/O (1 RX/ 1TX) of 8Gbps transfer for each direction
(~1.5% overhead due to 128/120 encoding)
- ❖ **Bus Speed Mode (use 4 parallel data lines)**
 - UHS-I mode
 - SDR12: SDR up to 25MHz, 1.8V signaling
 - SDR25: SDR up to 50MHz, 1.8V signaling
 - SDR50: 1.8V signaling, frequency up to 100MHz, up to 50 MB/sec
 - SDR104: 1.8V signaling, frequency up to 208MHz, up to 104 MB/sec
 - DDR50: 1.8V signaling, frequency up to 50MHz, sampled on both clock edges, up to 50 MB/sec

2. PRODUCT SPECIFICATIONS



2.1. Performance

Table 2-1 Performance of SD (Fx Premium)

Capacity	Sequential (Burst Mode)		Sequential (Sustained Mode)	
	Read (MB/s)	Write (MB/s)	Read (MB/s)	Write (MB/s)
128GB	810	500	650	60
256GB	810	700	650	60

NOTES:

1. The performance is obtained from CrystalDiskMark
2. Samples are made of 3D TLC Flash.
3. Performance may vary from flash configuration and platform.
4. The PCIe performance was measured by direct connecting to mother board reader
5. The Burst mode size is the 1/8 capacity.

2.2. Power

Table 2-2 Maximum Power Consumption of SD (Fx Premium)

Capacity	Read (mA)	Write (mA)	Standby (mA)
128GB	400	400	1
256GB	400	400	1

NOTES:

1. Power consumption may vary from flash configuration and platform.

2.3. MTBF

MTBF, an acronym for Mean Time Between Failures, is a measure of a device's reliability. Its value represents the average time between a repair and the next failure. The higher the MTBF value, the higher the reliability of the device. The predicted result of FLEXXON's SD Express Series SD is more than 3,000,000 hours.

2.4. Data Retention

- 10 years if > 90% life remaining (@25C)
- 1 year if < 10% life remaining (@25C)

3. ENVIRONMENTAL SPECIFICATIONS



Test Items	Test Conditions
Storage Temperature	-40°C ~ 85°C
Operating Temperature	-25°C ~ 85°C
Storage Humidity	40°C, 93% RH
Operating Humidity	25°C, 95% RH
Shock	500G, Half Sin Pulse Duration 1ms
Vibration	80Hz ~ 2000Hz/20G, 20Hz ~ 80Hz/1.52mm, 3 axis/30min
Drop	150cm free fall, 6 face of each unit
Bending	≥ 10N, Hold 1 min/5 times
Torque	0.15N-m or +/-2.5 deg, Hold 30 seconds/5 times
Salt Spray	Concentration: 3% NaCl, Temperature: 35°C, 24hours
Waterproof	Water temperature: 25°C Water depth: The lowest point of unit is locating 1000mm below surface. Storage for 30 mins
X-Ray	0.1 Gy of medium-energy radiation (70 keV to 140 keV, cumulative dose per year) to both sides of the card Storage for 30 mins
Durability	10,000 times
ESD	Contact: +/- 4KV each item 25 times Air: +/- 8KV 10 times

4. ELECTRICAL SPECIFICATIONS



4.1. DC Characteristics

4.1.1. Bus Operation Conditions

Table 4-1 Threshold Level for High Voltage Range

Parameter	Symbol	Min.	Max	Unit	Condition
Supply Voltage	V_{DD}	2.7	3.6	V	
Output High Voltage	V_{OH}	$0.75 \cdot V_{DD}$		V	$I_{OH} = -2mA$ V_{DD} Min
Output Low Voltage	V_{OL}		$0.125 \cdot V_{DD}$	V	$I_{OL} = 2mA$ V_{DD} Min
Input High Voltage	V_{IH}	$0.625 \cdot V_{DD}$	$V_{DD} + 0.3$	V	
Input Low Voltage	V_{IL}	$V_{SS} - 0.3$	$0.25 \cdot V_{DD}$	V	
Power Up Time			250	ms	From 0V to V_{DD} min

Table 4-2 Peak Voltage and Leakage Current

Parameter	Symbol	Min	Max.	Unit	Remarks
Peak voltage on all lines		-0.3	$V_{DD} + 0.3$	V	
All Inputs					
Input Leakage Current		-10	10	μA	
All Outputs					
Output Leakage Current		-10	10	μA	

Table 4-3 Threshold Level for 1.8V Signaling

Parameter	Symbol	Min.	Max	Unit	Condition
Supply Voltage	V_{DD}	2.7	3.6	V	
Regulator Voltage	V_{DDIO}	1.7	1.95	V	Generated by V_{DD}
Output High Voltage	V_{OH}	1.4	-	V	$I_{OH} = -2mA$
Output Low Voltage	V_{OL}	-	0.45	V	$I_{OL} = 2mA$
Input High Voltage	V_{IH}	1.27	2.00	V	
Input Low Voltage	V_{IL}	$V_{SS} - 0.3$	0.58	V	

Table 4-4 Input Leakage Current for 1.8V Signaling


Parameter	Symbol	Min	Max.	Unit	Remarks
Input Leakage Current		-2	2	μA	DAT3 pull-up is disconnected.

4.1.2. Bus Operation Conditions for PCIe

Table 4-5 Bus Operation Conditions of VDD3

Parameter	Symbol	Min	Max.	Unit	Remarks
Supply Voltage	V_{DD2}	1.14	1.3	V	-
Capacitance connected to V_{DD2}	C_{C2}	-	2	μF	-
Host capacitance recommended for V_{DD3}	C_{h3}	22	-	μF	-

4.1.3. Bus Signal Line Load

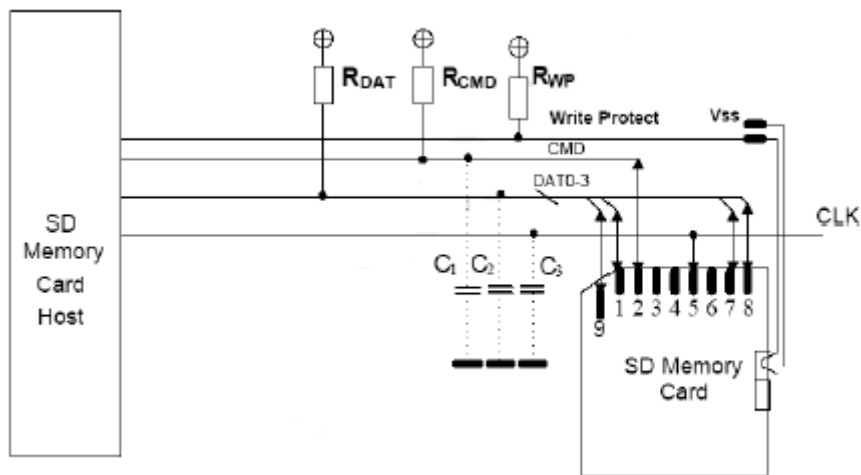


Bus Operation Conditions – Signal Line's Load

$$\text{Total Bus Capacitance} = C_{\text{HOST}} + C_{\text{BUS}} + N C_{\text{CARD}}$$

Parameter	symbol	Min	Max	Unit	Remark
Pull-up resistance	R_{CMD} R_{DAT}	10	100	$k\Omega$	to prevent bus floating
Total bus capacitance for each signal line	C_L		40	pF	1 card $C_{\text{HOST}} + C_{\text{BUS}}$ shall not exceed 30 pF
Card Capacitance for each signal pin	C_{CARD}		10	pF	
Maximum signal line inductance			16	nH	
Pull-up resistance inside card (pin1)	R_{DAT3}	10	90	$k\Omega$	May be used for card detection
Capacity Connected to Power Line	C_C		5	μF	To prevent inrush current

4.1.4. Power Up Time of Host

Host needs to keep power line level less than 0.5V and more than 1ms before power ramp up.

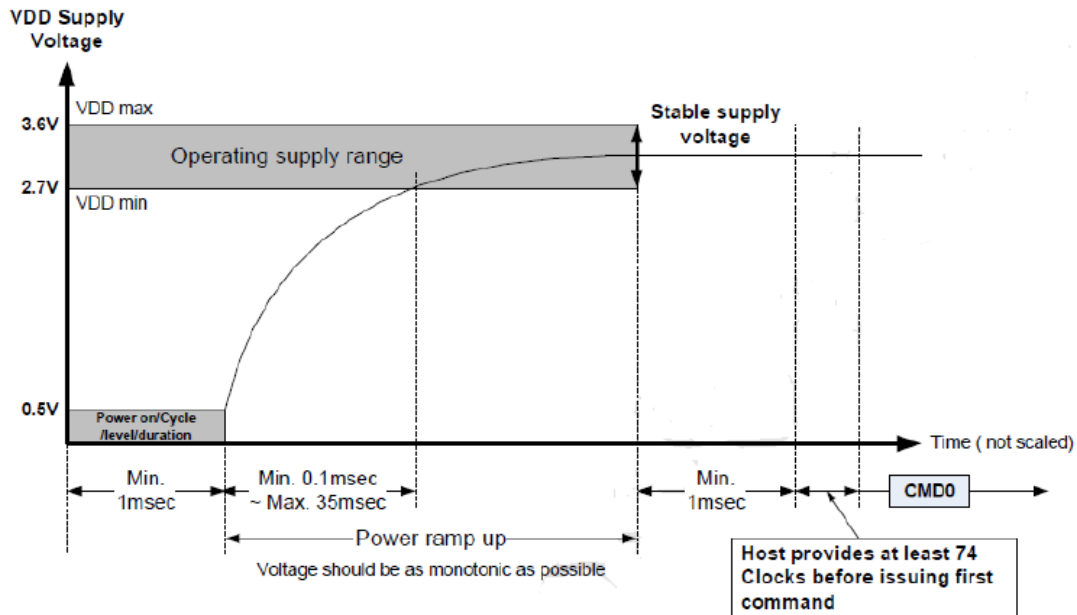

Power On or Power Cycle

Followings are requirements for Power on and Power cycle to assure a reliable SD Card hard reset.

- (1) Voltage level shall be below 0.5V
- (2) Duration shall be at least 1ms.

Power Supply Ramp Up

The power ramp up time is defined from 0.5V threshold level up to the operating supply voltage which is stable between VDD (min.) and VDD (max.) and host can supply SDCLK.

Followings are recommendation of Power ramp up:

- (1) Voltage of power ramp up should be monotonic as much as possible.
- (2) The minimum ramp up time should be 0.1ms.
- (3) The maximum ramp up time should be 35ms for 2.7-3.6V power supply.
- (4) Host shall wait until VDD is stable.
- (5) After 1ms VDD stable time, host provides at least 74 clocks before issuing the first command.


Power Down and Power Cycle

- When the host shuts down the power, the card VDD shall be lowered to less than 0.5Volt for a minimum period of 1ms. During power down, DAT, CMD, and CLK should be disconnected or driven to logical 0 by the host to avoid a situation that the operating current is drawn through the signal lines.
- If the host needs to change the operating voltage, a power cycle is required. Power cycle means the power is turned off and supplied again. Power cycle is also needed for accessing cards that are already in *Inactive State*. To create a power cycle the host shall follow the power down description before power up the card (i.e. the card VDD shall be once lowered to less than 0.5Volt for a minimum period of 1ms).


4.1.5. Power Up Time of Card

A device shall be ready to accept the first command within 1ms from detecting VDD min.


Device may use up to 74 clocks for preparation before receiving the first command.

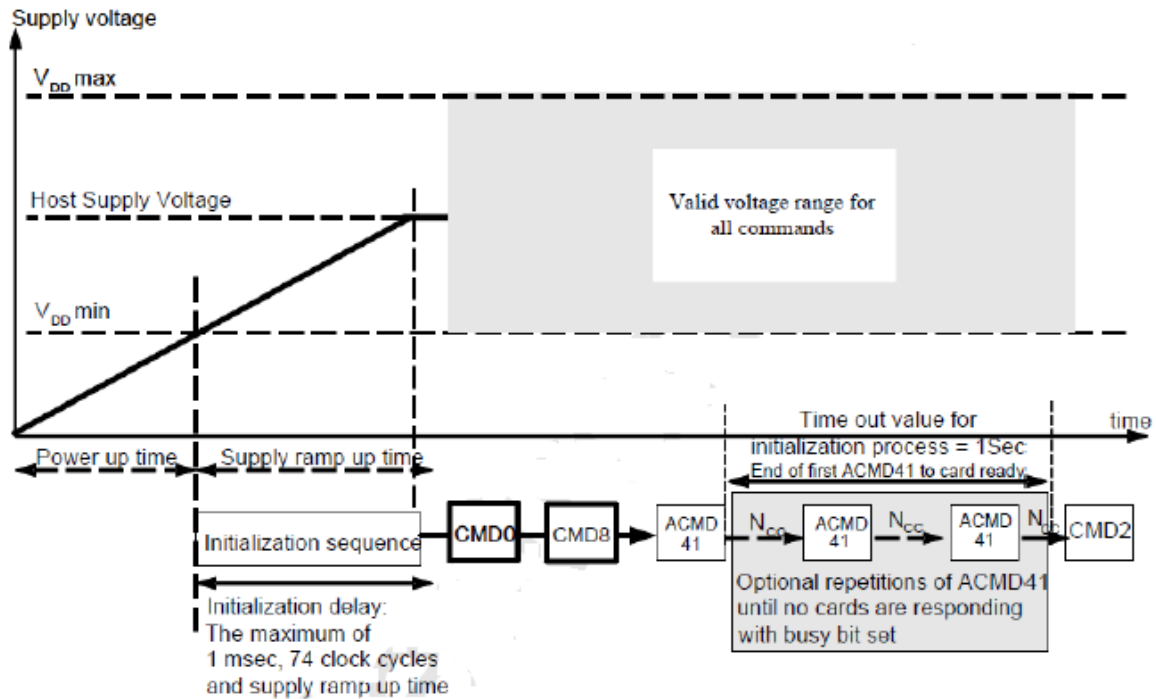


4.2. AC Characteristic

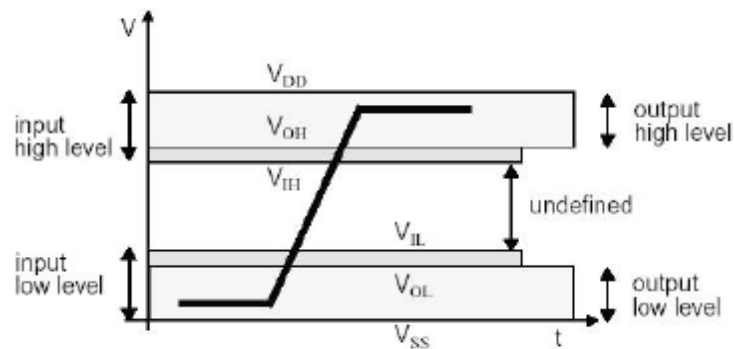

4.2.1. SD Interface timing (Default)

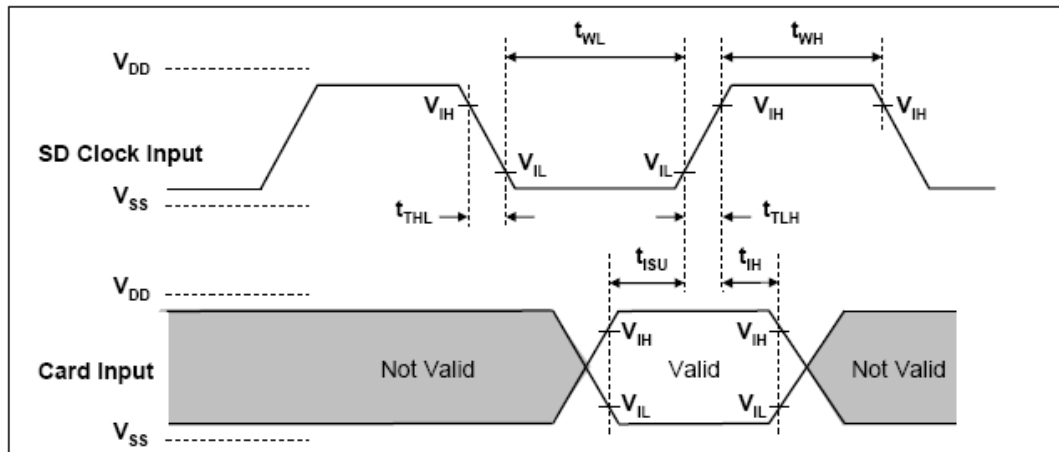

Card Input Timing (Default Speed Card)

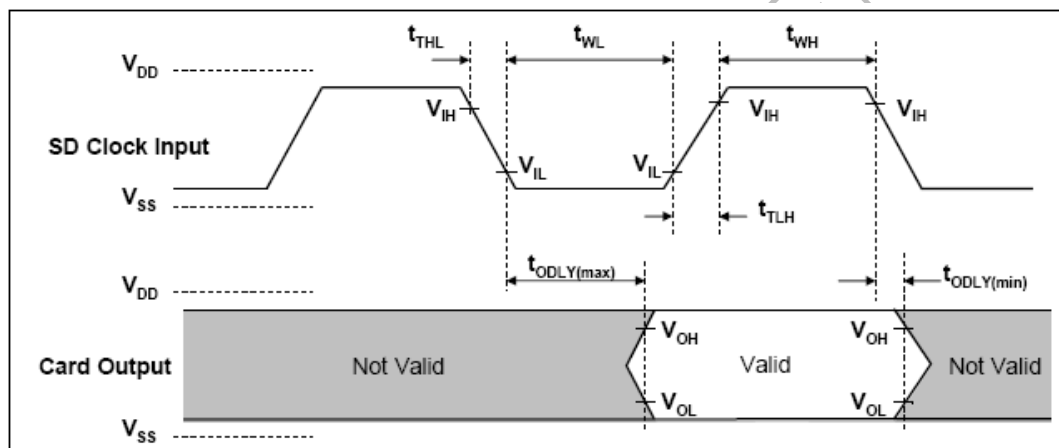



Card Output Timing (Default Speed Mode)

Parameter	Symbol	Min	Max	Unit	Remark
Clock CLK (All values are referred to min(V_{IH}) and max(V_{IL}))					
Clock frequency Data Transfer Mode	f _{PP}	0	25	MHz	C _{card} ≤ 10 pF (1 card)
Clock frequency Identification Mode	f _{OD}	0 ₍₁₎ /100	400	KHz	C _{card} ≤ 10 pF (1 card)
Clock low time	t _{WL}	10		ns	C _{card} ≤ 10 pF (1 card)
Clock high time	t _{WH}	10		ns	C _{card} ≤ 10 pF (1 card)
Clock rise time	t _{TLH}		10	ns	C _{card} ≤ 10 pF (1 card)
Clock fall time	t _{THL}		10	ns	C _{card} ≤ 10 pF (1 card)
Inputs CMD, DAT (referenced to CLK)					
Input set-up time	t _{ISU}	5		ns	C _{card} ≤ 10 pF (1 card)

Input hold time	t_{IH}	5		ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Outputs CMD, DAT (referenced to CLK)					
Output Delay time during Data Transfer Mode	t_{ODLY}	0	14	ns	$C_L \leq 40 \text{ pF}$ (1 card)
Output Delay time during Identification Mode	t_{ODLY}	0	50	ns	$C_L \leq 40 \text{ pF}$ (1 card)

(1) 0Hz means to stop the clock. The given minimum frequency range is for cases where continues clock is required.

4.2.2.SD Interface Timing (High-Speed Mode)

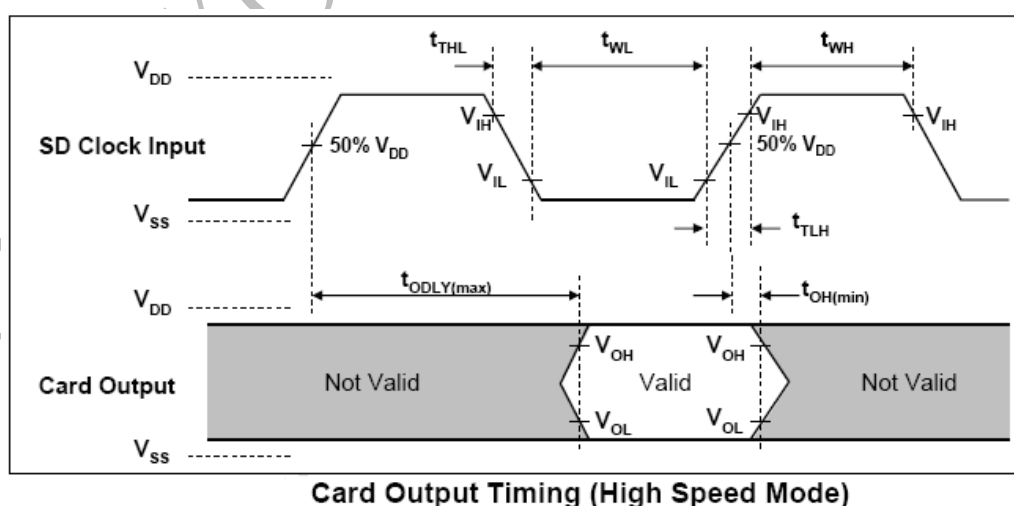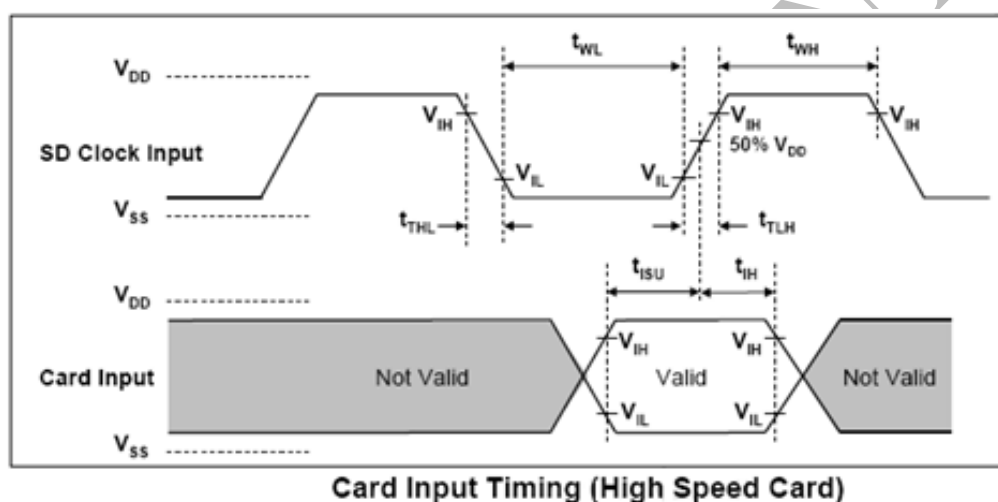


Parameter	Symbol	Min	Max	Unit	Remark
Clock CLK (All values are referred to min(V_{IH}) and max(V_{IL}))					
Clock frequency Data Transfer Mode	f_{PP}	0	50	MHz	$C_{card} \leq 10 \text{ pF}$ (1 card)
Clock low time	t_{WL}	7		ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Clock high time	t_{WH}	7		ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Clock rise time	t_{TLH}		3	ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Clock fall time	t_{THL}		3	ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Inputs CMD, DAT (referenced to CLK)					
Input set-up time	t_{ISU}	6		ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Input hold time	t_{IH}	2		ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Outputs CMD, DAT (referenced to CLK)					
Output Delay time during Data Transfer Mode	t_{ODLY}		14	ns	$C_L \leq 40 \text{ pF}$ (1 card)
Output Hold time	T_{OH}	2.5		ns	$C_L \leq 15 \text{ pF}$ (1 card)
Total System capacitance of each line ¹	C_L		40	pF	$C_L \leq 15 \text{ pF}$ (1 card)

(1) In order to satisfy severe timing, the host shall drive only one card.

4.2.3. SD Interface timing (SDR12, SDR25, SDR50 and SDR104 Modes)

Input:

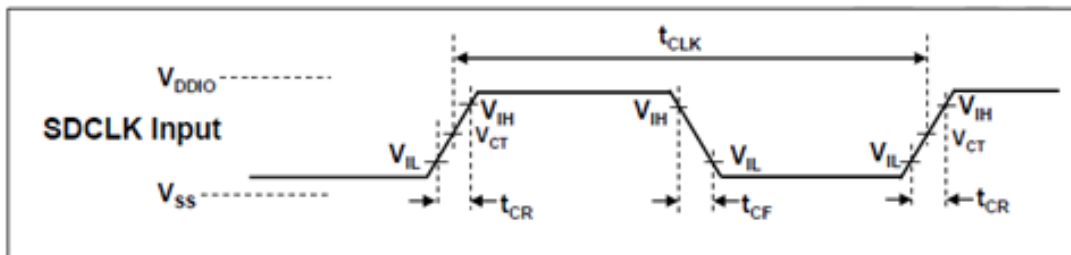


Clock Signal Timing

Symbol	Min	Max	Unit	Remark
t_{CLK}	4.80	-	ns	208MHz (Max.), Between rising edge, $V_{CT} = 0.975V$
t_{CR}, t_{CF}	-	$0.2 * t_{CLK}$	ns	$t_{CR}, t_{CF} < 0.96ns$ (max.) at 208MHz, $C_{CARD} = 10pF$ $t_{CR}, t_{CF} < 2.00ns$ (max.) at 100MHz, $C_{CARD} = 10pF$ The absolute maximum value of t_{CR}, t_{CF} is 10ns regardless of clock frequency
Clock Duty	30	70	%	

Clock Signal Timing


SDR12, SDR25, SDR50 and SDR104 Input Timing:

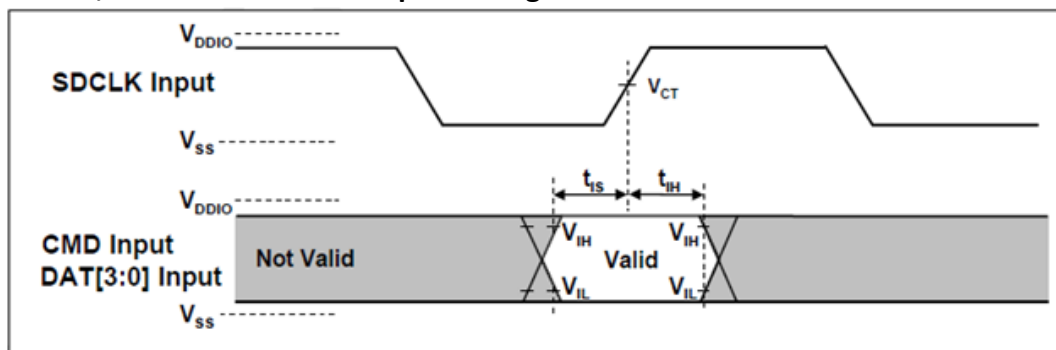

Card Input Timing

Symbol	Min	Max	Unit	SDR104 Mode
t_{IS}	1.40	-	ns	$C_{CARD} = 10pF, V_{CT} = 0.975V$
t_{IH}	0.8	-	ns	$C_{CARD} = 5pF, V_{CT} = 0.975V$
Symbol	Min	Max	Unit	SDR50 Mode
t_{IS}	3.00	-	ns	$C_{CARD} = 10pF, V_{CT} = 0.975V$
t_{IH}	0.8	-	ns	$C_{CARD} = 5pF, V_{CT} = 0.975V$


Output (SDR12, SDR25, SDR50):

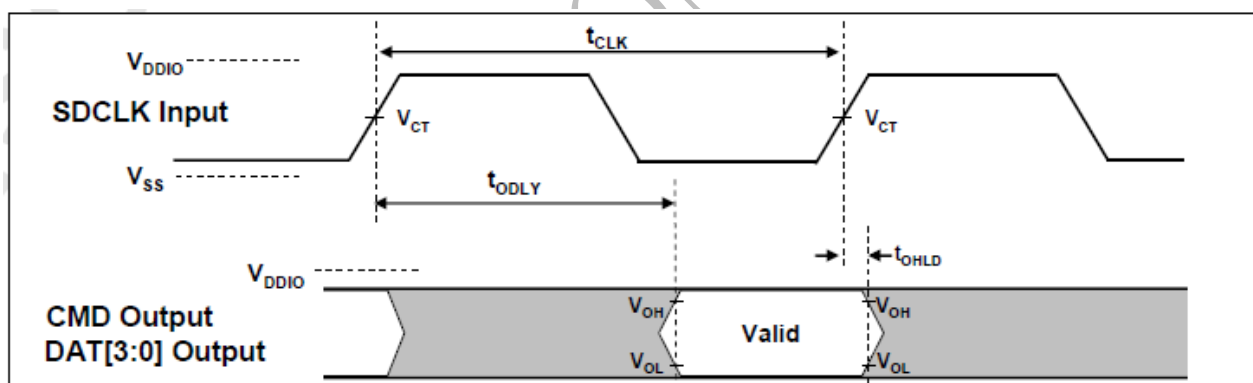

Output Timing of Fixed Data Window


Symbol	Min	Max	Unit	Remark
t_{ODLY}	-	7.5	ns	$t_{CLK} \geq 10.0ns, C_L = 30pF$, using driver Type B, for SDR50
t_{ODLY}	-	14	ns	$t_{CLK} \geq 20.0ns, C_L = 40pF$, using driver Type B, for SDR25 and SDR12,
T_{OH}	1.5	-	ns	Hold time at the t_{ODLY} (min.), $C_L = 15pF$

Output (SDR104 Mode):

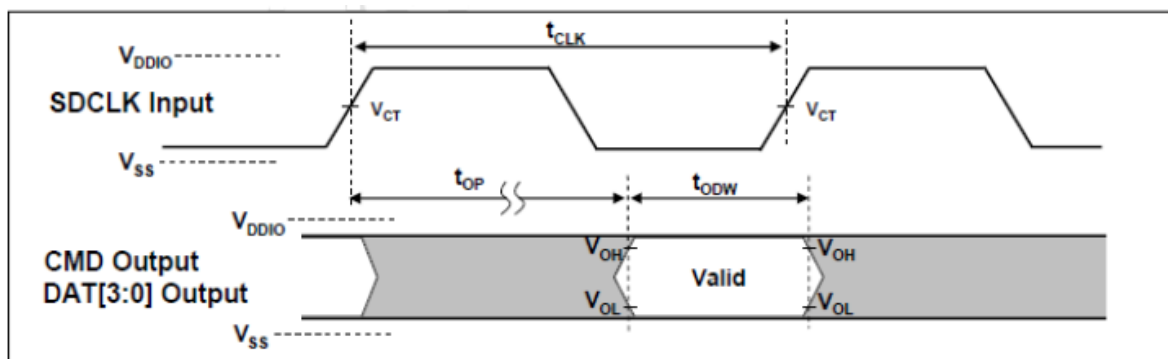


Symbol	Min	Max	Unit	Remark
t_{OP}	0	2	UI	Card Output Phase
Δt_{OP}	-350	+1550	ps	Delay variable due to temperature change after tuning
t_{ODW}	0.60	-	UI	$t_{ODW} = 2.88\text{ns}$ at 208MHz

4.2.4. SD Interface timing (DDR50 Mode)

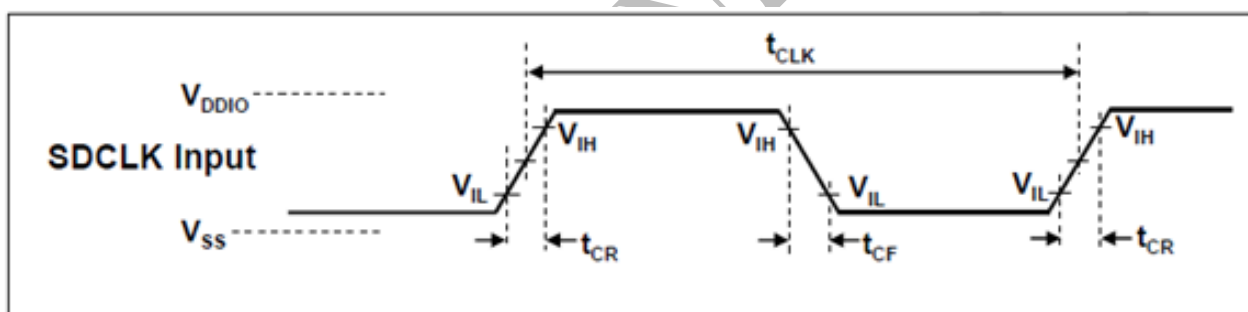

Clock Signal Timing

Symbol	Min	Max	Unit	Remark
t_{CLK}	20	-	ns	50MHz (Max.), Between rising edge
t_{CR}, t_{CF}	-	$0.2 * t_{CLK}$	ns	$t_{CR}, t_{CF} < 4.00\text{ns}$ (max.) at 50MHz, $C_{CARD}=10\text{pF}$
Clock Duty	45	55	%	

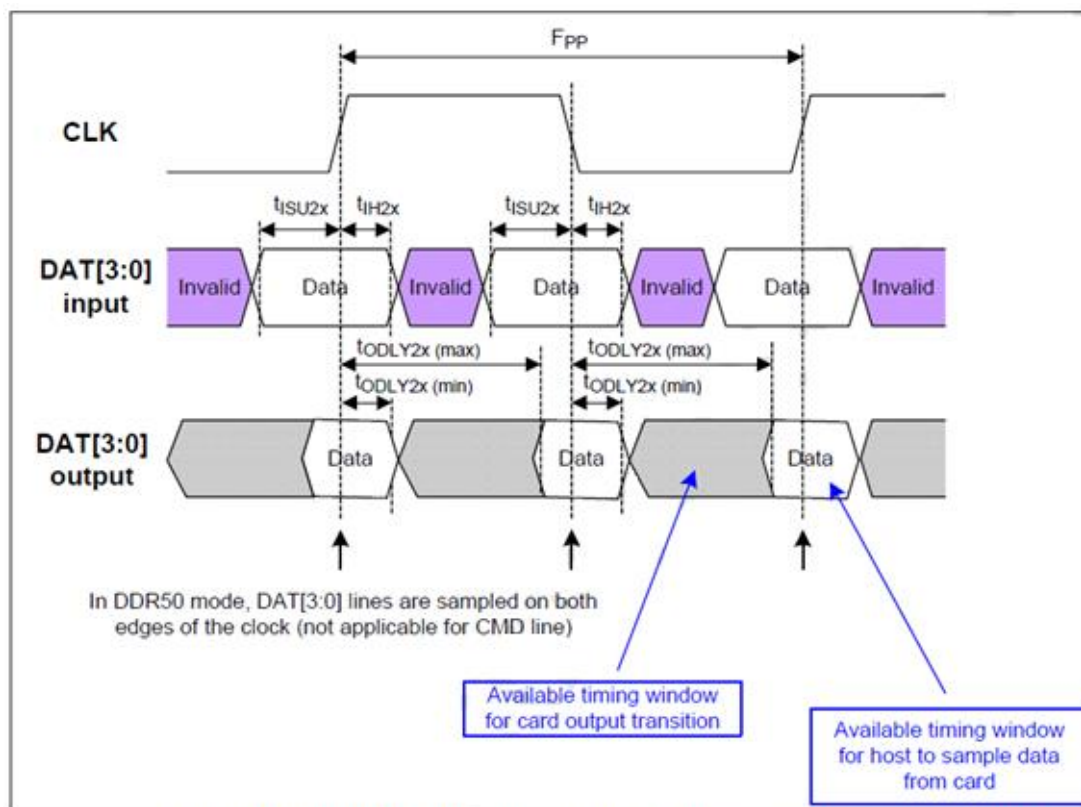

Timing Diagram DAT Inputs/Outputs Referenced to CLK in DDR50 Mode

Bus Timings – Parameters Values (DDR50 Mode)

Parameter	Symbol	Min	Max	Unit	Remark
Input CMD (referenced to CLK rising edge)					
Input set-up time	t_{ISU}	3	-	ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Input hold time	t_{IH}	0.8	-	ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Output CMD (referenced to CLK rising edge)					
Output Delay time during Data Transfer Mode	t_{ODLY}		13.7	ns	$C_L \leq 30 \text{ pF}$ (1 card)
Output Hold time	T_{OH}	1.5	-	ns	$C_L \geq 15 \text{ pF}$ (1 card)
Inputs DAT (referenced to CLK rising and falling edges)					
Input set-up time	t_{ISU2x}	3	-	ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Input hold time	t_{IH2x}	0.8	-	ns	$C_{card} \leq 10 \text{ pF}$ (1 card)
Outputs DAT (referenced to CLK rising and falling edges)					
Output Delay time during Data Transfer Mode	t_{ODLY2x}	-	7.0	ns	$C_L \leq 25 \text{ pF}$ (1 card)
Output Hold time	T_{OH2x}	1.5	-	ns	$C_L \geq 15 \text{ pF}$ (1 card)

5. PAD ASSIGNMENT



5.1. Pad Assignment and Descriptions

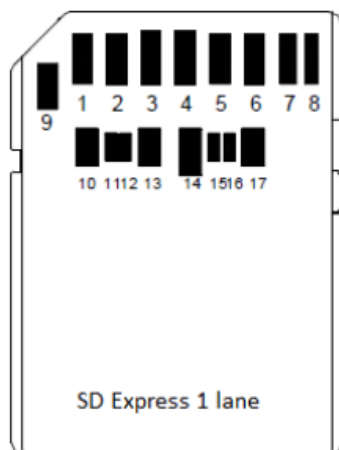


Table 5-1 1-Lane SD Express Interface Memory Card Pad Assignment

pin	SD Mode			PCIe Mode		
	Name	Type ¹	Description	Name	Type	Description
1	CD/DAT3 ²	I/O/PP ³	Card Detect/ Data Line[bit3]	PERST#	I	PE-Reset is a functional reset
2	CMD	PP	Command/Response	-	-	Not Used ⁽⁴⁾
3	V _{SS1}	S	Supply voltage ground	V _{SS1}	S	Supply voltage ground
4	V _{DD}	S	Supply voltage	V _{DD1}	S	Supply voltage (3.3V)
5	CLK	I	Clock	-	-	Not Used ⁽⁴⁾
6	V _{SS2}	S	Supply voltage ground	V _{SS2}	S	Supply voltage ground
7	DAT0	I/O/PP	Data Line[bit0]	RCLK+	IDS	PCIe Ref Clock
8	DAT1	I/O/PP	Data Line[bit1]	RCLK-	IDS	PCIe Ref Clock
9	DAT2	I/O/PP	Data Line[bit2]	CLKREQ#	I/O/OD	Reference clock request signal. Also used by L1 PM sub-states
10	-	-	Not Used	V _{SS3}	S	Supply voltage ground
11	-	-	Not Used	PCIe_Tx+	IDS	-
12	-	-	Not Used	PCIe_Tx-	IDS	-
13	-	-	Not Used	V _{SS4}	S	Supply voltage ground
14	-	-	Not Used	V _{DD2}	S	Supply voltage (1.8V)
15	-	-	Not Used	PCIe_Rx-	ODS	-
16	-	-	Not Used	PCIe_Rx+	ODS	-
17	-	-	Not Used	V _{SS5}	S	Supply voltage ground

- (1) S: power supply, I: input; O: output using push-pull drivers; PP: I/O using push-pull drivers; OD: I/O using Open Drain drivers; IDS: Input Differential Signal; ODS: Output Differential Signal.
- (2) The extended DAT lines (DAT1-DAT3) are input on power up. They start to operate as DAT lines after SET_BUS_WIDTH command. The Host shall keep its own DAT1-DAT3 lines in input mode as well while they are not used. It is defined so in order to keep compatibility to MultiMedia Cards.
- (3) At power up, this line has a 50KOhm pull up enabled in the card. This resistor serves two functions: Card detection and Mode Selection. For Mode Selection, the host can drive the line high or let it be pulled high to select SD mode. If the host wants to select SPI mode, it should drive the line low. For Card detection, the host detects that the line is pulled high. This pull-up should be disconnected by the user during regular data transfer with SET_CLR_CARD_DETECT (ACMD42) command.
- (4) Pin2 and Pin5 shall not be kept open by host in PCIe Mode.

5.2. PCIe Bus

Refer to PCI Express standard defined by the PCI-SIG. The command layer used by the PCIe interface is NM Express (NVMe) and standard defined by the NVM Express.

6. REGISTERS




6.1. Card Register

Name	Width	Description
CID	128bit	Card identification number; card individual number for identification.
RCA ¹	16bit	Relative card address; local system address of a card, dynamically suggested by the card and approved by the host during initialization.
DSR	16bit	Driver Stage Register; to configure the card's output drivers.
CSD	128bit	Card Specific Data; Information about the card operation conditions.
SCR	64bit	SD Configuration Register; Information about the SD Memory Card's Special Features capabilities
OCR	32bit	Operation conditions register.
SSR	512bit	SD Status; Information about the card proprietary features.
CSR	32bit	Card Status; Information about the card status.

(1) RCA register is not used (or available) in SPI mode.

7. PHYSICAL DIMENSION

Dimension: 32mm(L) x 24mm(W) x 2.1mm(H)

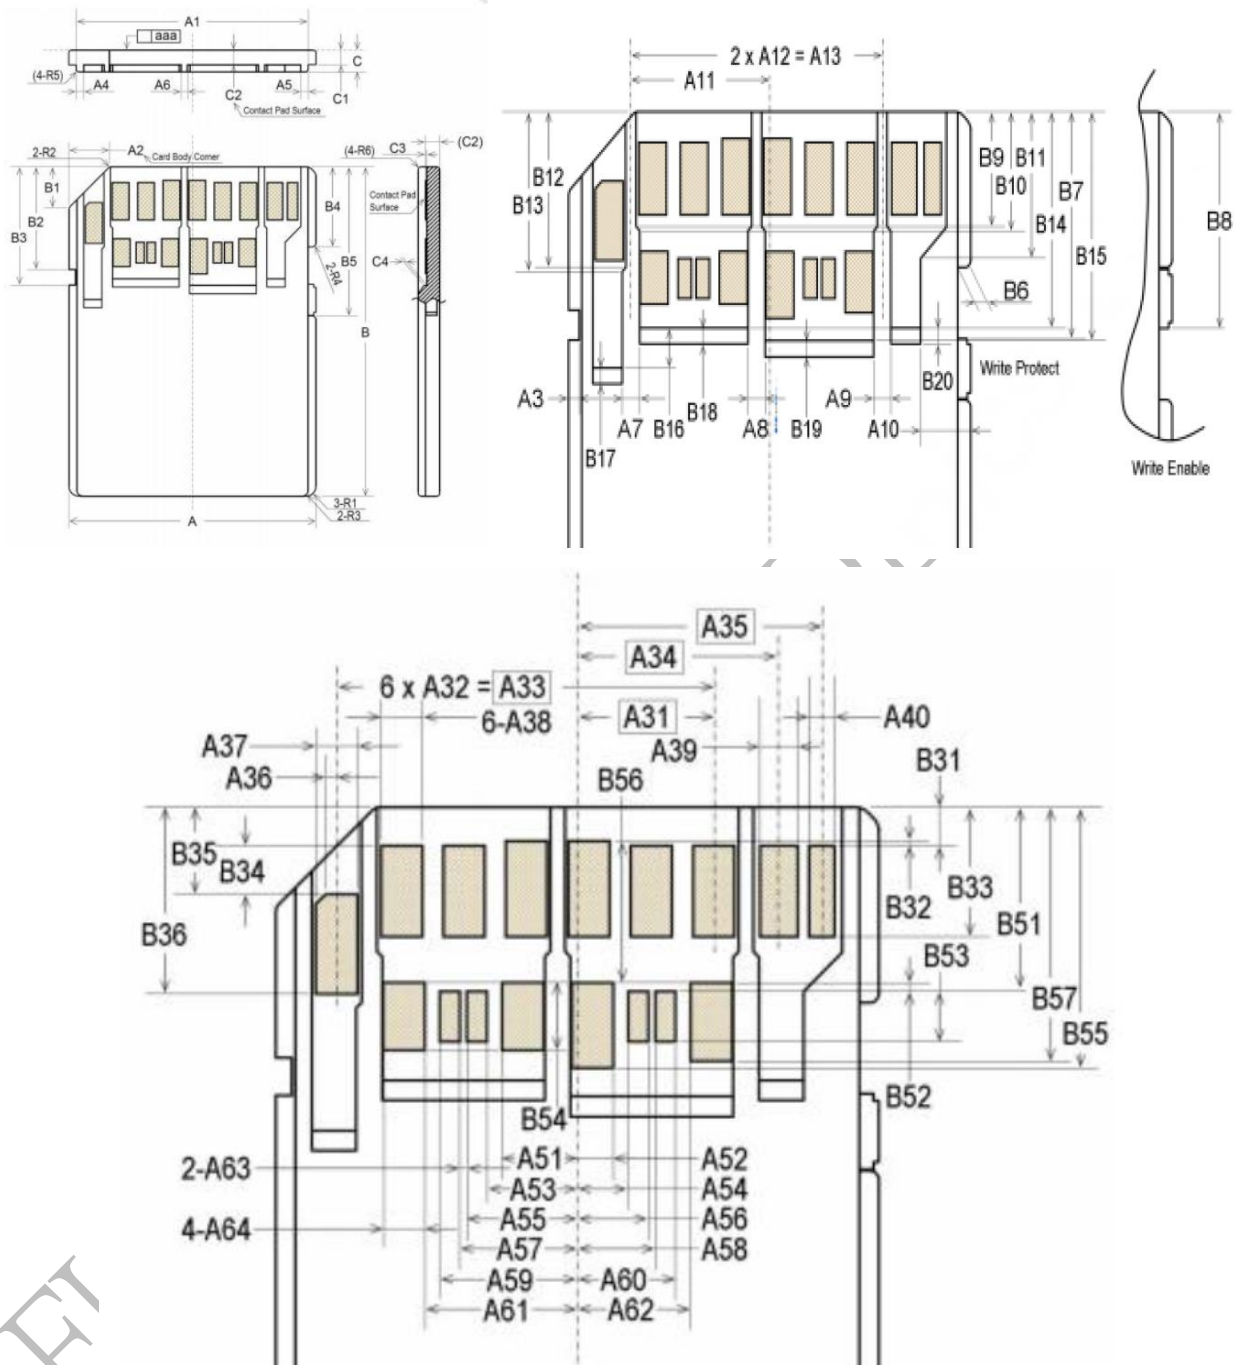

COMMON DIMENSIONS				NOTE
SYMBOL	MIN	NOM	MAX	
A	23.9	24.0	24.1	
A1	22.4	22.5	22.5	
A2	3.85	4.00	4.15	
A3	0.60	0.75	0.90	
A4	0.55	0.70	0.85	
A5	0.55	0.70	0.85	
A6	0.45	0.60	0.75	
A7	0.90	1.05	1.20	
A8	0.90	1.05	1.20	
A9	0.90	1.05	1.20	
A10	2.85	3.00	3.15	
A11	7.975	8.125	8.275	
A12	-	7.50	-	
A13	14.85	15.00	15.15	
A31	-	5.625	-	BASIC
A32	-	2.5	-	
A33	-	15.00	-	BASIC
A34	-	8.05	-	BASIC
A35	-	9.75	-	BASIC
A36	0.25	-	-	
A37	1.40	-	-	
A38	1.40	-	-	
A39	1.10	-	-	
A40	0.90	-	-	
A51	2.675	2.825	2.975	
A52	1.425	1.575	1.725	
A53	3.325	3.475	3.625	
A54	2.075	2.225	2.375	
A55	4.125	4.275	4.425	
A56	2.875	3.025	3.175	
A57	4.325	4.475	4.625	
A58	3.075	3.225	3.375	
A59	5.125	5.275	5.425	
A60	3.875	4.025	4.175	
A61	5.775	5.925	6.075	
A62	4.525	4.675	4.825	
A63	0.20	-	-	*8
A64	1.65	-	1.85	

1. Dimensions are in millimeters.
2. VDD2 pad must not be connected with the contact pins for xD of a combo connector.
3. Whichever of VDD1 and VDD2 may be connected first.
4. However, the legacy signal pins should be connected after VDD1.
5. The UHS-II signal pins should be connected after VDD2.
6. When a card is pushed in front of the lock position, the signal and GND contact pins are allowed to disconnect once.
7. Also refer to detailed description of Standard Size SD Card Mechanical Specification Version 3.00 for the legacy shape portion.
8. This is a double dimension. It shall satisfy this rule, after satisfying other rules.

	COMMON DIMENSIONS			
SYMBOL	MIN	NOM	MAX	NOTE
B	31.90	32.00	32.10	
B1	3.85	4.00	4.15	
B2	9.85	10.00	10.15	
B3	11.35	11.50	11.65	
B4	7.65	7.80	7.95	
B5	14.35	14.50	14.65	
B6	0.60	0.75	0.90	
B7	11.30	11.45	11.60	
B8	10.70	10.85	11.00	
B9	5.65	5.80	5.95	
B10	5.875	-	-	
B11	7.20	7.35	7.50	
B12	7.65	7.80	7.95	
B13	7.875	-	-	
B14	10.75	10.90	11.05	
B15	11.40	11.55	11.70	
B16	1.85	2.00	2.15	
B17	0.65	0.80	0.95	
B18	0.65	0.80	0.95	
B19	0.65	0.80	0.95	
B20	0.65	0.80	0.95	
B31	-	-	1.60	
B32	0.20	-	-	
B33	5.00	5.15	5.30	
B34	2.20	2.30	2.40	
B35	-	-	4.00	
B36	7.00	7.15	7.30	
B51	7.20	7.35	7.50	
B52	0.275	0.35	0.425	
B53	1.925	2.00	2.075	
B54	2.625	2.70	2.775	
B55	10.25	10.40	10.55	
B56	5.65	-	-	*8
B57	9.55	10.40	10.55	
C	1.95	2.10	2.25	
C1	1.25	1.40	1.55	
C2	1.30	1.40	1.60	
C3	0.00	-	-	
C4	-	-	0.30	

	COMMON DIMENSIONS			
SYMBOL	MIN	NOM	MAX	NOTE
R1	0.90	1.00	1.10	
R2	0.40	0.50	0.60	
R3	0.35	0.50	0.65	
R4	0.15	0.3	0.45	
R5	0.15	0.3	0.45	
R6	0.15	0.3	0.45	
D1	1.50	-	-	
D2	1.50	-	-	
D3	3.4	-	-	
aaa	-	-	0.20	

8. ORDERING INFORMATION



Capacity	MPN
128GB	FDMS128GBC-5700
256GB	FDMS256GBC-5700

FLEXXON CONFIDENTIAL

Revision History

Revision	Release Date	Description
1.0	2024/12	First release

FLEXXON CONFIDENTIAL