


Terminal Block

5.08mm Pitch

multicompPRO

**RoHS
Compliant**

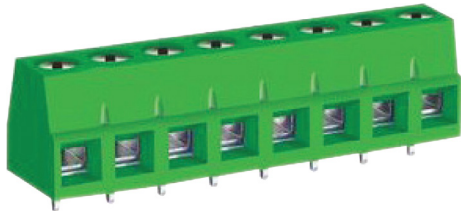


Specifications

Current Rating	: 16Amp 300V (UG B/D)
Insulation withstands Volt	: AC1600V 1 minute
Insulation Resistance	: >2000MΩ DC500V
Operation Temperature	: -40°C to +105°C
Wire Strip length	: 6 ~ 7mm
Wire Range	: 12 ~ 26 AWG
Screw Torque	: 5 ~ 7 lb-inch

Note: The all technical data in accordance to UL/CUL

Diagram

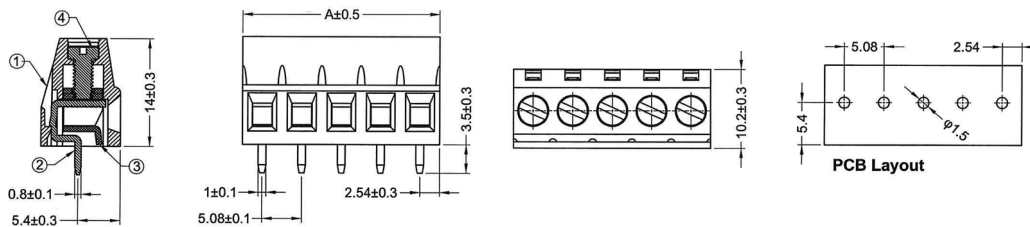

No.	Material		Plating/Finish	Remark
1	Insulating Body	Polyamide 66 (UL94V-0)	-	Green
2	Terminal	Brass	Tin Plated	
3	Cage Clamp	Steel	Ni Plated	
4	Screw	Steel	Ni Plated	

Part Number Table

Description	“A” Dimensions		Part Number
	mm	Inches	
Terminal Block PCB 5.08mm Screw 02 Way	10.2	0.4	MC000034
Terminal Block PCB 5.08mm Screw 03 Way	15.3	0.6	MC000035
Terminal Block PCB 5.08mm Screw 04 Way	20.3	0.8	MC000036
Terminal Block PCB 5.08mm Screw 05 Way	25.4	1	MC000037
Terminal Block PCB 5.08mm Screw 06 Way	30.5	1.2	MC000038
Terminal Block PCB 5.08mm Screw 08 Way	40.6	1.6	MC000039
Terminal Block PCB 5.08mm Screw 10 Way	50.8	2	MC000040
Terminal Block PCB 5.08mm Screw 12 Way	60.96	2.4	MC000041

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO