



Image for illustration only



Features:

- 40W Small Compact Size 61.1 x 45.6 x 23.5mm
- Wide AC & DC Input 90V to 305VAC (47~440Hz)
- Temperature Range -40°C to +85°C
- EMC Compliant without external components
- Over-voltage Category **OVC IV** (Meets EN62368)
- Output Range: 5V - 48VDC
- Low Standby Power <0.1W
- Fully Isolated Pri - Sec >5700Vrms
- Insulation: Class II
- Materials: UL94-V0
- Meet: IEC/EN/UL62368, EN61558, EN60332-1, IEC61010-1:2020
- 3 Year Warranty



Description

VTX-214-040-3## is a compact AC-DC power converter. It features a wide AC input 90V to 305Vac and a DC input voltage 120 to 430VDC. The converters have been designed with low power consumption, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets safety standards IEC/EN/UL62368, EN60335, EN61558, EN62477 standards.

The converters are widely used in industrial Control, Monitoring, power, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in this Datasheet or contact our Technical team for further support.

Selection Guide						
Part Number	Power Rating Watts	Output Voltage (VDC)	Output Current (mA)	Ambient Temp. (°C)	Efficiency Typical	Input Range
VTX-214-040-305	35	5	7000	50°C (85°C @ 25%)	90%	90 - 305VAC (120 - 430VDC)
VTX-214-040-312	40	12	3333			
VTX-214-040-315	40	15	2666			
VTX-214-040-324	40	24	1666			
VTX-214-040-348	40	48	833			
Note: Other output voltages are available upon request.						

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com

Input Specification						
Item	Conditions	Min	Typical	Max	Unit	
Input Voltage	AC Input	90	-	305	VAC	
	DC Input	120	-	430	VDC	
Input Frequency		47	-	440	Hz	
Input Current	115VAC	-	-	1	A	
	230VAC	-	-	0.5		
Inrush Curent	115VAC	-	-	60		
	230VAC	-	-	100		
Leakage Current	277VAC / 50Hz	0.2mA RMS Max				
External Input Fuse		2Amp Slow Blow Fuse				

Output Specification					
Item	Conditions	Min	Typical	Max	Unit
Output Voltage	Output	-	+/-2	-	%
Line Regulation	Full Load	-	+/-0.5	-	
Load Regulation	0% - 100% Load	-	+/-1	-	
Ripple / Noise	20MHz Bandwidth (Peak to Peak Value)	-	150	400	mV
Stand by Power	230VAC	-	0.15	0.2	W
Temp. Coefficient		-	+/-0.05	-	%/°C
Short Circuit Protection		Hiccup, Continuous, Self-recovery			
Over Current Protection		>150% Load Self-recovery			
Over Voltage Category	OVC	IV			
Over Voltage Protection	Output: 5V	<7.5VDC (Output Voltage Clamp)			
	Output: 12V/15V	<20VDC (Output Voltage Clamp)			
	Output: 24V	<30VDC (Output Voltage Clamp)			
Minimum Load		0	-	-	%
Hold-up Time	115VAC Input	-	10	-	mS
	230VAC Input	-	30	-	

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

General Specification					
Item	Conditions	Min	Typical	Max	Unit
Dielectric Strength	Input to Output (1Min, 5mA)	5700	-	-	VAC
Insulation Resistance	Input to Output (500VDC)	100			M.Ohm
Operating Temperture		-40	-	+85	°C
Storage Temperture		-40	-	+85	
Storage Humidity		-	-	+95	%RH
Soldering Temperature	Wave Soldering	260 +/-5°C			
	Manual Soldering	360 +/-5°C			
Switching Frequency		-	TBA	-	KHz
Altitude		-	-	5000	m
Safety Class		CLASS II			
MTBF		>500KHrs @ 25°C (MIL-HDBK-217F)			
Safety Approvals		IEC/EN/UL62368-1, EN61558, EN60335-1, EN62477-1, IEC61010-1			
Dimensions		64.10 x 45.6 x 23.5mm			
Weight		120 g			

EMC Specification - IN PROGRESS		
Emissions	CE /RE	CISPR32 / EN55032 CLASS B EN55014-1
Immunity	ESD	IEC/EN 61000-4-2 Contact +/-6KV EN55014-2
	RS	IEC/EN 61000-4-3 10V/m EN55014-2
	EFT	IEC/EN 61000-4-4
	SURGE	IEC/EN 61000-4-5, EN55014-2 (Line to Line +/-2KV / Line to PE +/-4KV)
	CS	IEC/EN 61000-4-6 10V/r.m.s. EN55014-2
	Voltage Variation	IEC/EN 61000-4-11, EN55014-2


Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com

Application Schematic for EMC


Typical Application

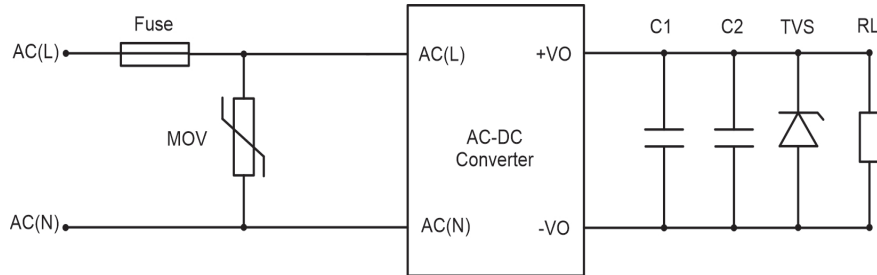


Part Number	C1	C2	TVS	Fuse	MOV	Capacitance Load Max
VTX-214-040-305	1uF/50V	220uF/16V	SMBJ7.0A	2Amp/300V Slow Blow	S14K350	8000 uF
VTX-214-040-312		100uF/25V	SMBJ20A			6000 uF
VTX-214-040-315		100uF/25V	SMBJ20A			5000 uF
VTX-214-040-324		100uF/35V	SMBJ30A			1200 uF
VTX-214-040-348		100uF/60V				820 uF
Note: For additional filtering requirements, contact technical support						

Derating Graphs

Temperature Derating Graph

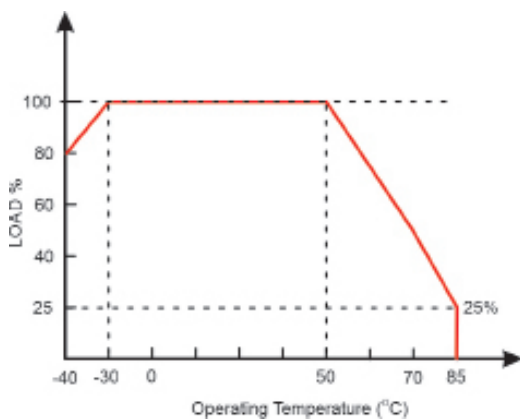

Input Voltage Derating Graph

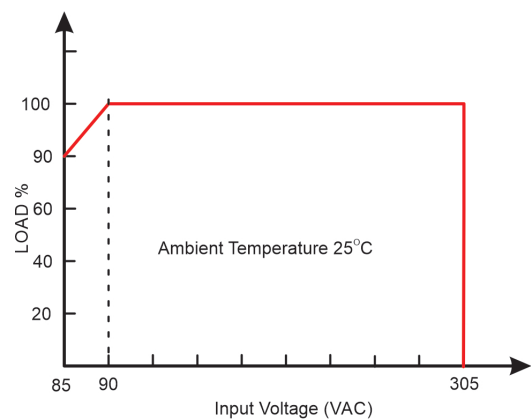


Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com

Dimensions

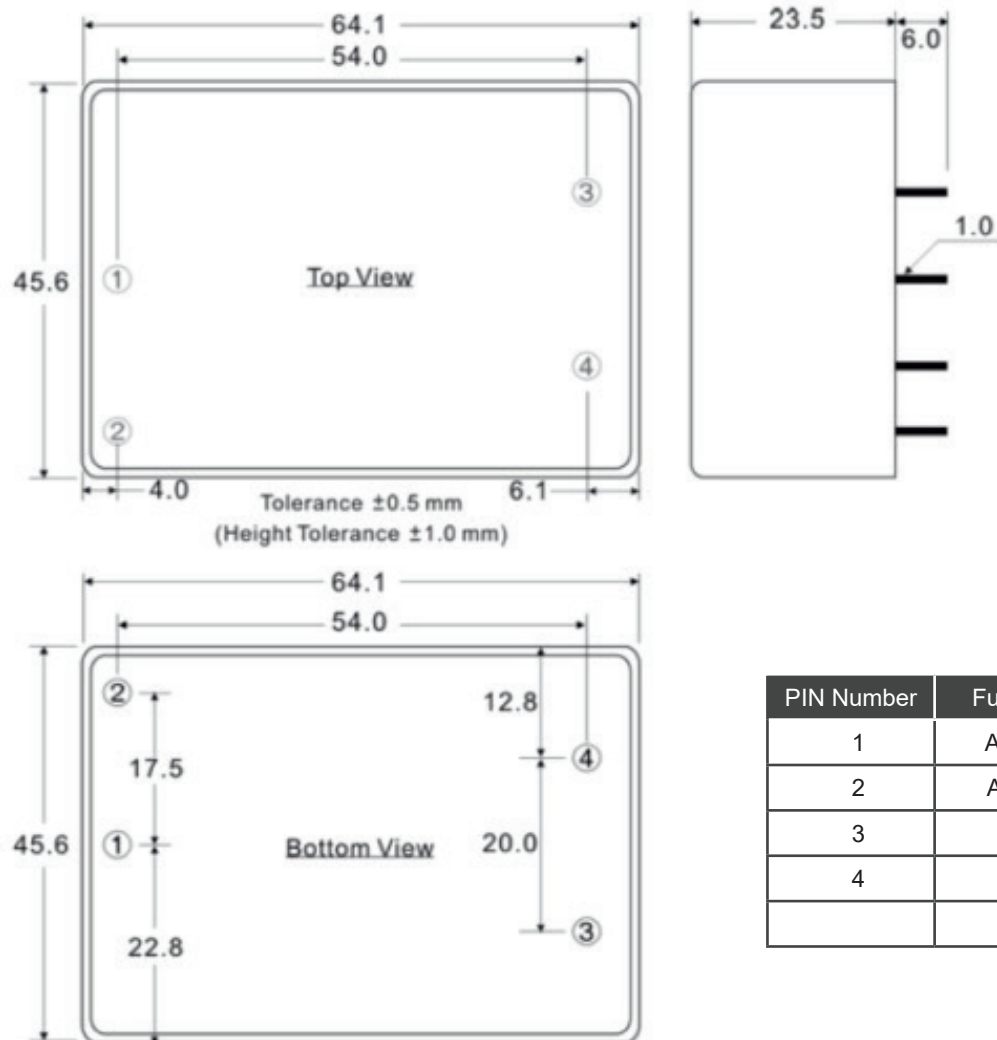

Please contact Vigortronix for any enquiries. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.

Vigortronix, 16 De Havilland Way, Witney, Oxfordshire, OX29 0YG, UK
Tel. +44 (0)1993 777570 Web. www.vigortronix.com, E-mail: sales@vigortronix.com
Vigortronix is a trading name of Vigortronix Limited

Vigortronix.com