Fast-Acting SMD Fuse 1206





Agency Approvals

Agency	Ampere Rating
Recognized Component for Canada and US	10A to 20A

RoHS Compliant

Interrupting Rating

10A to 20A: 100 amperes at 63V DC 250 amperes at 24V DC

Application

Widely used in all kinds of battery packs

Specifications

Material

Body : Ceramic

Termination : Silver(Ag) / Nickel(Ni) / Tin(Sn)

Fuse Element : Silver(Ag)

Operating Temperature : -55°C to +125°C

UL Approved


Electrical Characteristics

	Opening Time			
Ampere Rating	1 In	3.5 ln		
	Min.	Max.		
10A to 20A	4 hr	5 sec		

Part Number	Marking	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ω)	Nominal Melting I ² t (A ² sec.)
MP005483	10	10	24	0.0054	14
MP005484	12	12		0.004	19
MP005485	15	15		0.0033	33
MP005486	20	20		0.002	56

^{*}Measured at ≤10% of rated current at 25°C

Mechanical Diagram



Dimensions : Millimetres

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro




^{*}Melting I2t at 1000% of current rating

^{*}Surface Mount Fuse is a small device designed for secondary protection of circuits used in space constrained applications.


Fast-Acting SMD Fuse 1206



Clear Time Curve

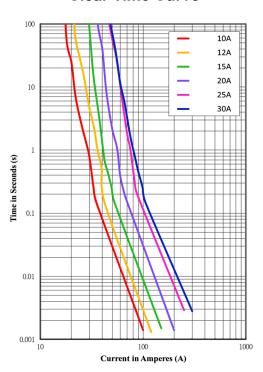

Average I²t VS. t Curve

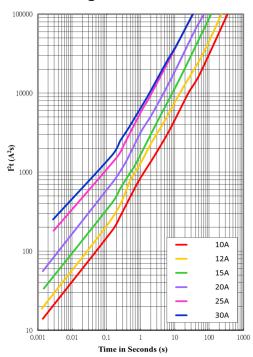

Part Number Table

Description	Part Number	
Fast-Acting SMD Fuse, 10A, 24V, 1206	MP005483	
Fast-Acting SMD Fuse, 12A, 24V, 1206	MP005484	
Fast-Acting SMD Fuse, 15A, 24V, 1206	MP005485	
Fast-Acting SMD Fuse, 20A, 24V, 1206	MP005486	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

