


SIPMOS[®] Small-Signal-Transistor
Features

- P-Channel
- Enhancement mode
- Logic level
- Avalanche rated
- dv/dt rated
- Pb-free lead plating; RoHS compliant

Product Summary

V_{DS}	-60	V
$R_{DS(on),max}$	0.3	Ω
I_D	-1.9	A

PG-SOT-223



Type	Package	Tape and Reel Information	Marking
BSP 171 P	PG-SOT-223	L6327	171P


Maximum ratings, at $T_j=25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
			steady state	
Continuous drain current	I_D	$T_A=25\text{ °C}^{1)}$	-1.9	A
		$T_A=70\text{ °C}^{1)}$	-1.5	
		$T_A=25\text{ °C}$	-7.6	
Pulsed drain current	$I_{D,pulse}$	$T_A=25\text{ °C}$	-7.6	
Avalanche energy, single pulse	E_{AS}	$I_D=-1.9\text{ A}, R_{GS}=25\ \Omega$	70	mJ
Reverse diode dv/dt	dv/dt	$I_D=-1.9\text{ A}, V_{DS}=-48\text{ V}, di/dt=-200\text{ A}/\mu\text{s}, T_{j,max}=150\text{ °C}$	-6	kV/ μs
Gate source voltage	V_{GS}		± 20	V
Power dissipation	P_{tot}	$T_A=25\text{ °C}^{1)}$	1.8	W
Operating and storage temperature	T_j, T_{stg}		-55 ... 150	$^{\circ}\text{C}$
IEC climatic category; DIN IEC 68-1			55/150/56	

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Thermal characteristics

Thermal resistance, junction - soldering point	R_{thJS}		-	-	25	K/W
Thermal resistance, junction - ambient	R_{thJA}	minimal footprint, steady state	-	-	110	
		6 cm ² cooling area ¹⁾ , steady state	-	-	70	

Electrical characteristics, at $T_j=25\text{ }^\circ\text{C}$, unless otherwise specified
Static characteristics

Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0\text{ V}$, $I_D=-250\text{ }\mu\text{A}$	-60	-	-	V
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$, $I_D=-460\text{ }\mu\text{A}$	-1	-1.5	-2	
Zero gate voltage drain current	I_{DSS}	$V_{DS}=-60\text{ V}$, $V_{GS}=0\text{ V}$, $T_j=25\text{ }^\circ\text{C}$	-	-0.1	-1	μA
		$V_{DS}=-60\text{ V}$, $V_{GS}=0\text{ V}$, $T_j=125\text{ }^\circ\text{C}$	-	-10	-100	
Gate-source leakage current	I_{GSS}	$V_{GS}=-20\text{ V}$, $V_{DS}=0\text{ V}$	-	-10	-100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS}=-4.5\text{ V}$, $I_D=-1.5\text{ A}$	-	0.3	0.45	Ω
		$V_{GS}=-10\text{ V}$, $I_D=-1.9\text{ A}$	-	0.21	0.3	
Transconductance	g_{fs}	$ V_{DS} >2 I_D R_{DS(on)max}$, $I_D=-1.5\text{ A}$	1.4	2.7	-	S

¹⁾ Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical in still air.

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic characteristics

Input capacitance	C_{iss}	$V_{GS}=0\text{ V}$, $V_{DS}=-25\text{ V}$, $f=1\text{ MHz}$	-	365	460	pF
Output capacitance	C_{oss}		-	105	135	
Reverse transfer capacitance	C_{rss}		-	40	55	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=-25\text{ V}$, $V_{GS}=-10\text{ V}$, $I_D=-1.9\text{ A}$, $R_G=6\ \Omega$	-	6	8	ns
Rise time	t_r		-	25	33	
Turn-off delay time	$t_{d(off)}$		-	208	276	
Fall time	t_f		-	87	130	

Gate Charge Characteristics²⁾

Gate to source charge	Q_{gs}	$V_{DD}=-48\text{ V}$, $I_D=1.9\text{ A}$, $V_{GS}=0\text{ to }-10\text{ V}$	-	-1.2	-1.6	nC
Gate to drain charge	Q_{gd}		-	-5	-7	
Gate charge total	Q_g		-	-13	-20	
Gate plateau voltage	$V_{plateau}$		-	-3	-	V
Output charge	Q_{oss}	$V_{DD}=-15\text{ V}$, $V_{GS}=0\text{ V}$	-	-5	-7	


Reverse Diode

Diode continuous forward current	I_S	$T_A=25\text{ }^\circ\text{C}$	-	-	-1.9	A
Diode pulse current	$I_{S,pulse}$		-	-	-7.6	
Diode forward voltage	V_{SD}	$V_{GS}=0\text{ V}$, $I_F=1.9\text{ A}$, $T_J=25\text{ }^\circ\text{C}$	-	-0.84	-1.1	V
Reverse recovery time	t_{rr}	$V_R=-30\text{ V}$, $I_F= I_S $, $di_F/dt=100\text{ A}/\mu\text{s}$	-	80	120	ns
Reverse recovery charge	Q_{rr}		-	-125	-190	

²⁾ See figure 16 for gate charge parameter definition


1 Power dissipation

$P_{tot}=f(T_A)$

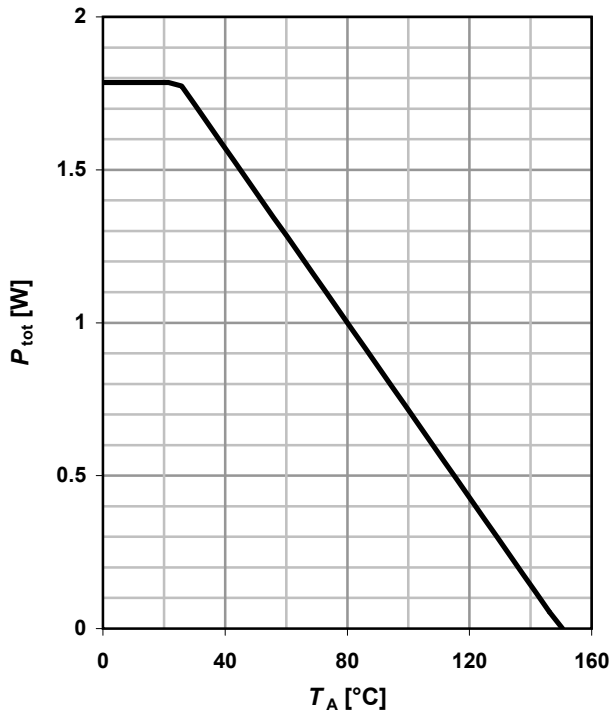

2 Drain current


$I_D=f(T_A); |V_{GS}| \geq 10 \text{ V}$

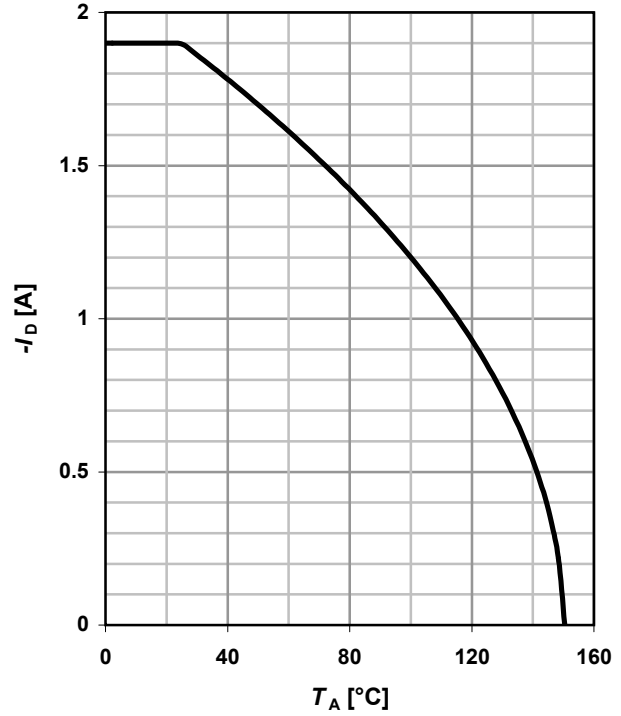

3 Safe operating area

$I_D=f(V_{DS}); T_A=25 \text{ }^\circ\text{C}^1); D=0$


parameter: t_p

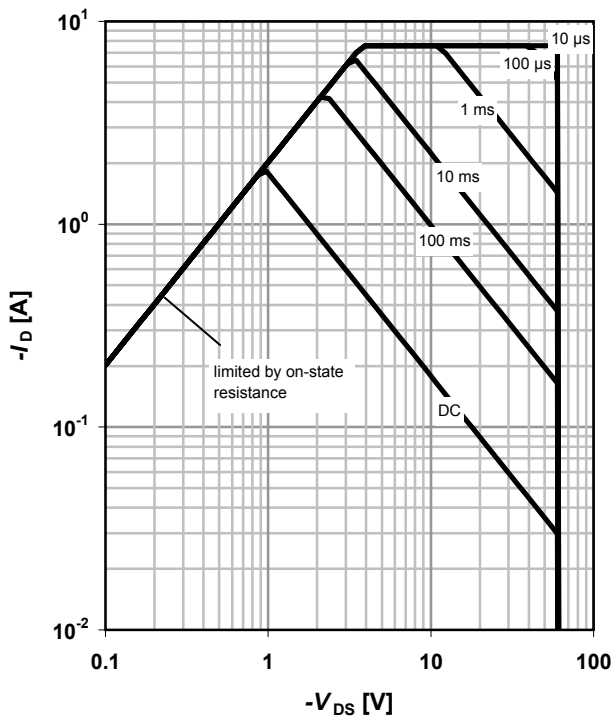

4 Max. transient thermal impedance

$Z_{thJA}=f(t_p)$


parameter: $D=t_p/T$

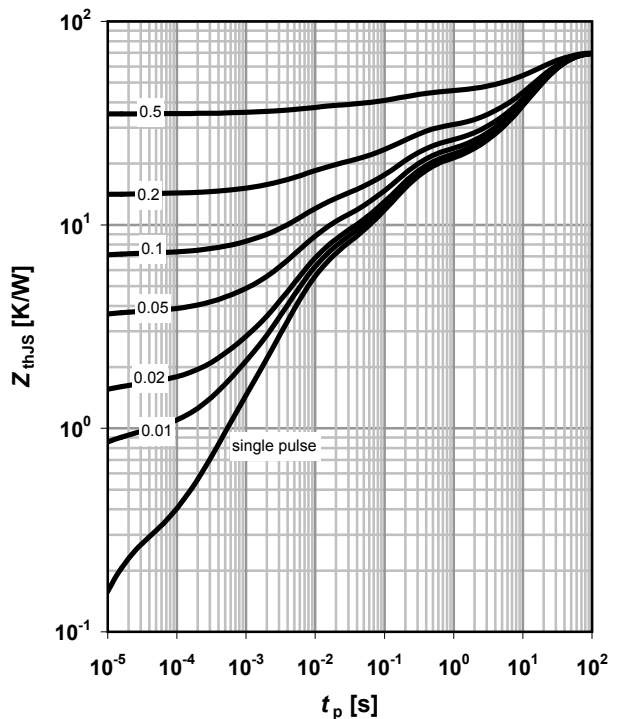

5 Typ. output characteristics

$I_D=f(V_{DS}); T_j=25\text{ }^\circ\text{C}$


parameter: V_{GS}

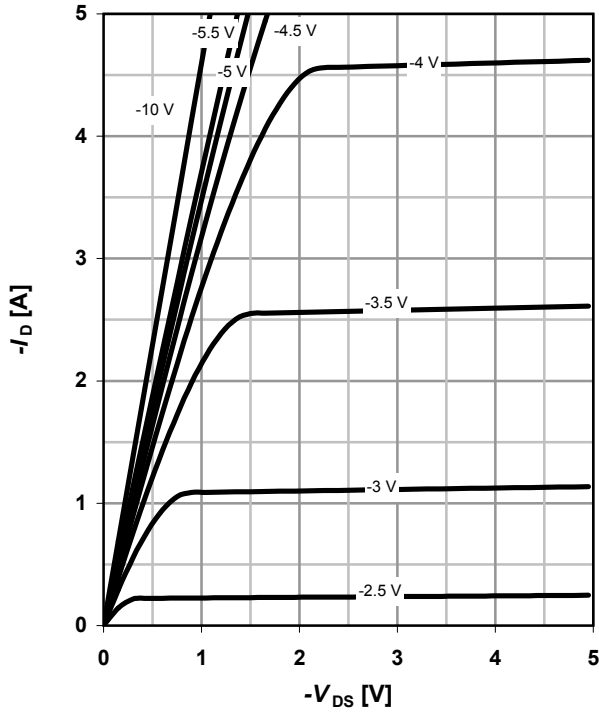

6 Typ. drain-source on resistance

$R_{DS(on)}=f(I_D); T_j=25\text{ }^\circ\text{C}$


parameter: V_{GS}

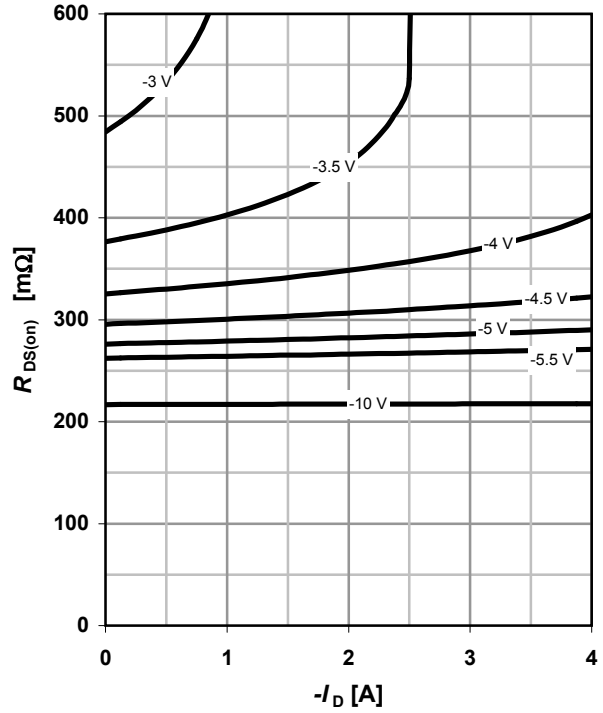

7 Typ. transfer characteristics


$I_D=f(V_{GS}); |V_{DS}|>2|I_D|R_{DS(on)max}$

parameter: T_j

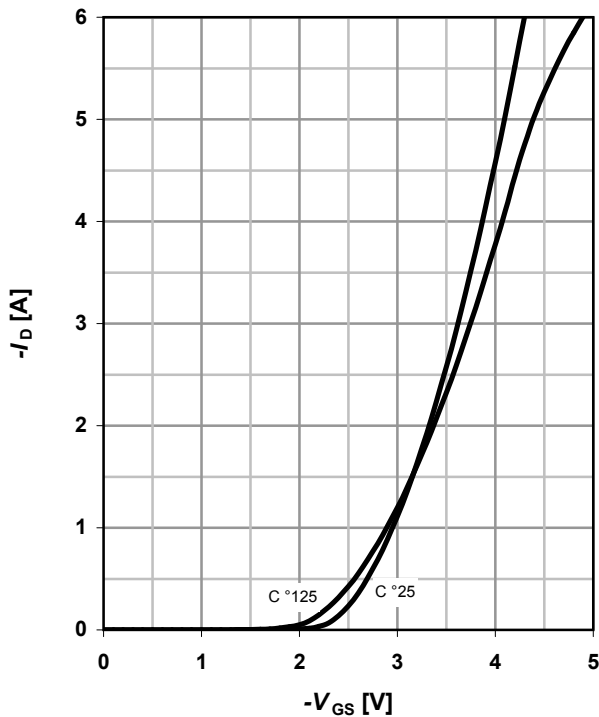


8 Typ. forward transconductance

$g_{fs}=f(I_D); T_j=25\text{ }^\circ\text{C}$

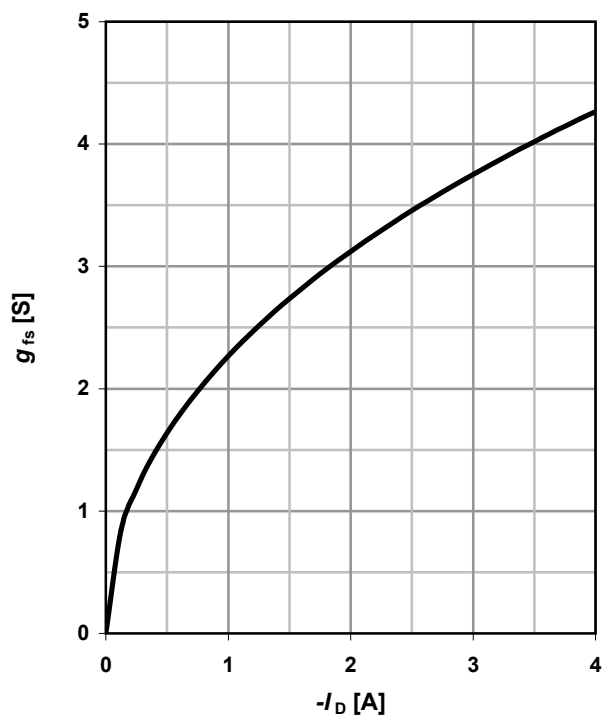


9 Drain-source on-state resistance

$R_{DS(on)}=f(T_j); I_D=-1.9\text{ A}; V_{GS}=-10\text{ V}$

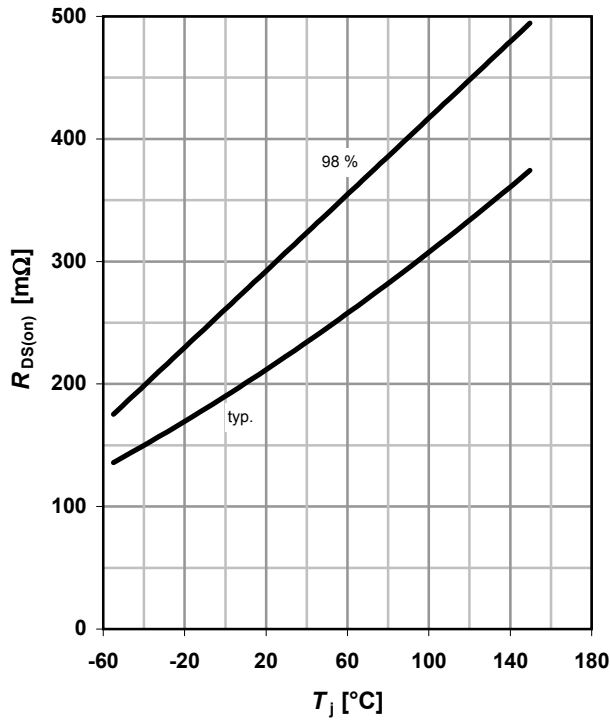


10 Typ. gate threshold voltage

$V_{GS(th)}=f(T_j); V_{GS}=V_{DS}; I_D=-460\ \mu\text{A}$

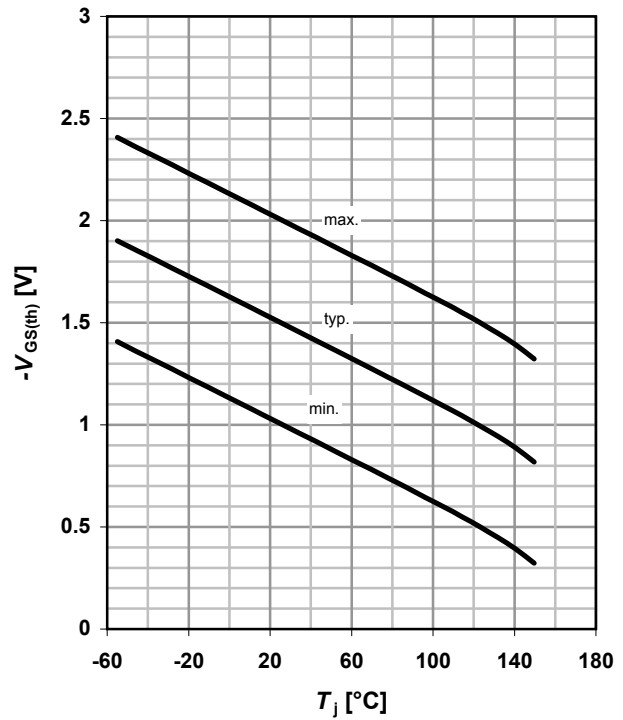

11 Typ. capacitances


$C=f(V_{DS}); V_{GS}=0\text{ V}; f=1\text{ MHz}$

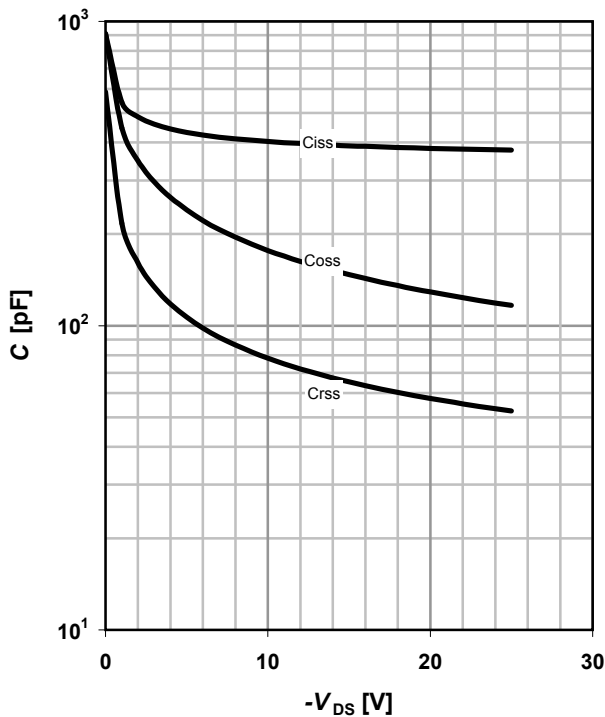

12 Forward characteristics of reverse diode

$I_F=f(V_{SD})$


parameter: T_j

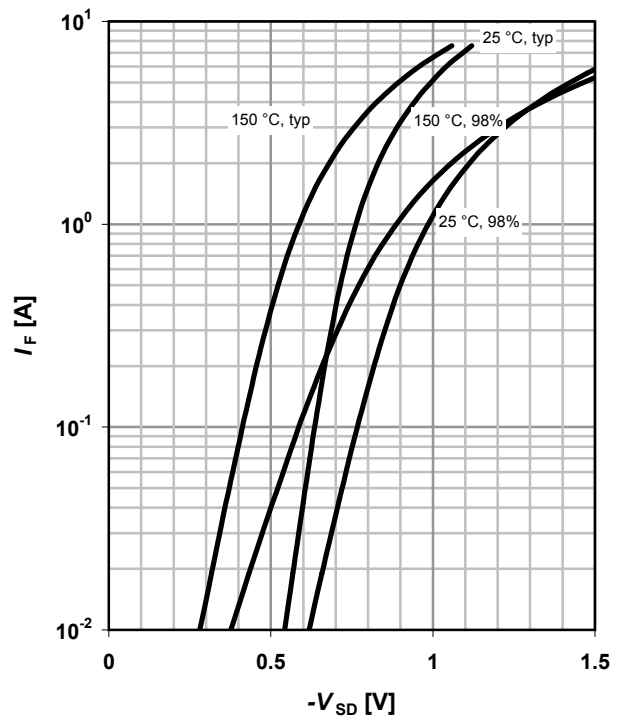

13 Avalanche characteristics

$I_{AS}=f(t_{AV}); R_{GS}=25 \Omega$


parameter: $T_{j(\text{start})}$

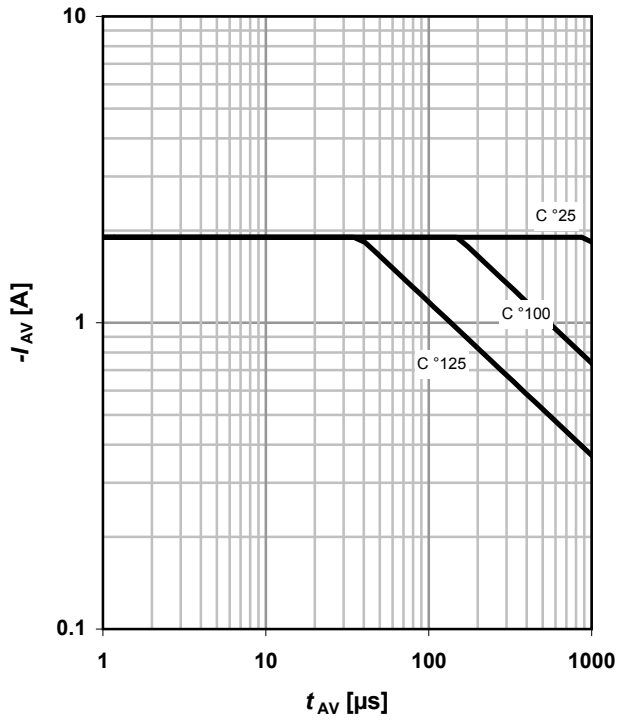

14 Typ. gate charge


$V_{GS}=f(Q_{\text{gate}}); I_D=-1.9 \text{ A pulsed}$

parameter: V_{DD}

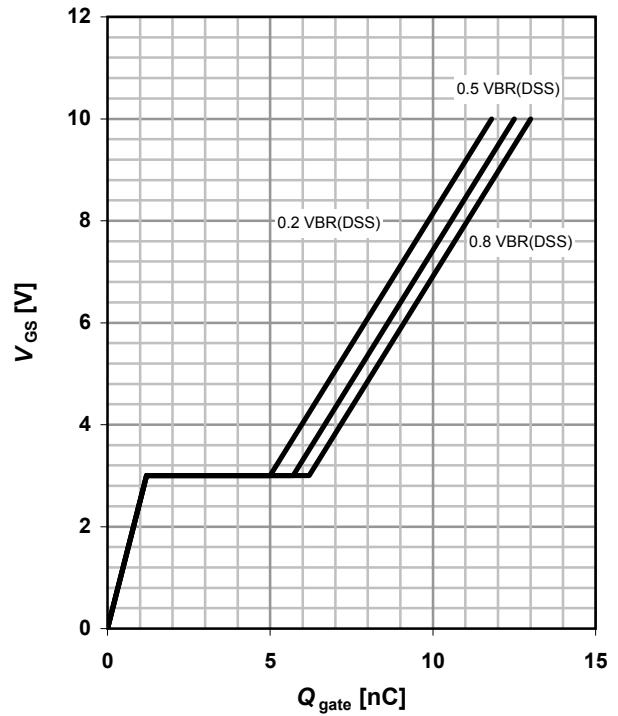


15 Drain-source breakdown voltage

$V_{BR(DSS)}=f(T_j); I_D=-1 \text{ mA}$

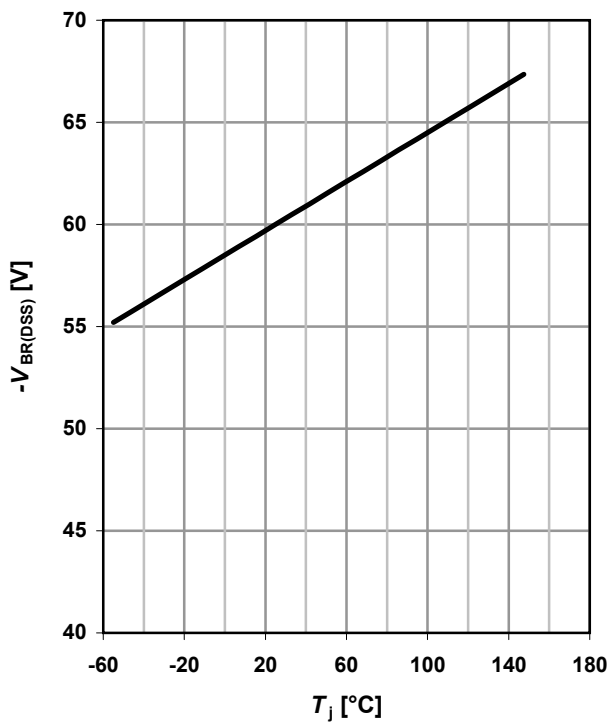


16 Gate charge waveforms

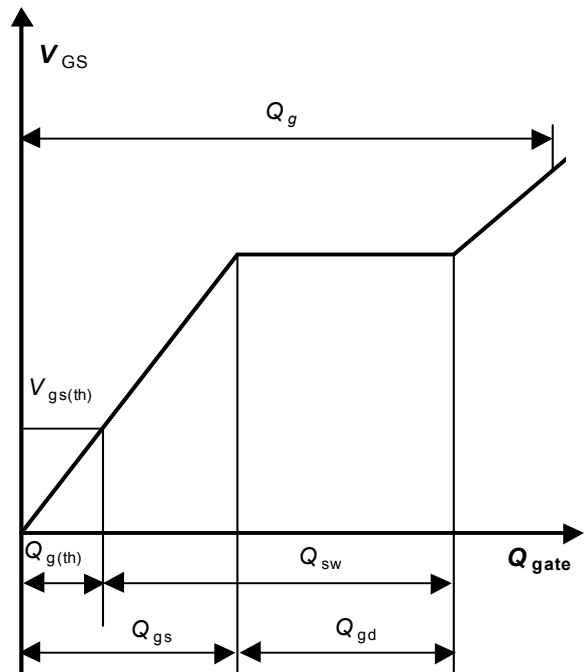


Package Outline

SOT-223: Outline

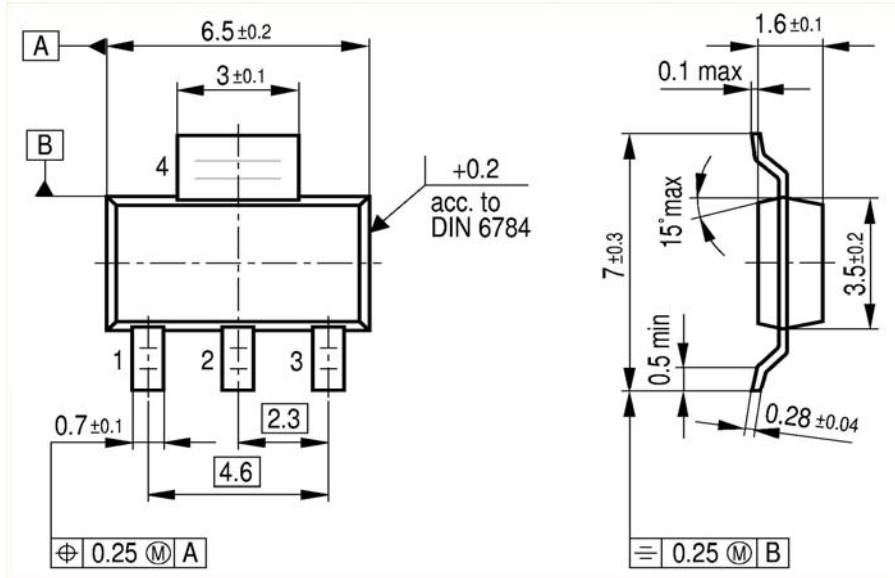


Footprint

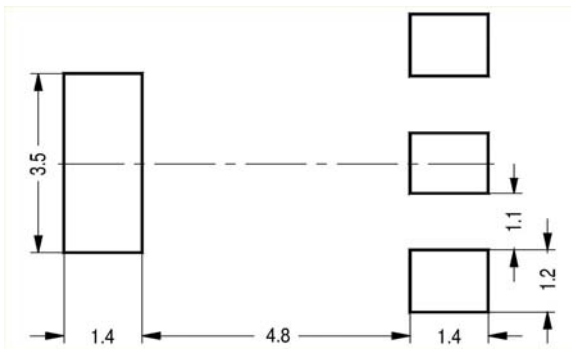

Packaging

Tape

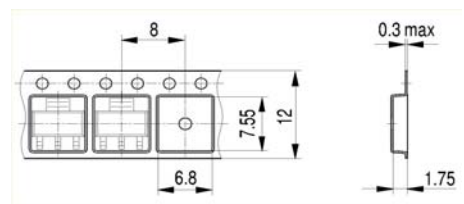

Dimensions in mm

Published by
Infineon Technologies AG
Bereich Kommunikation
St.-Martin-Straße 53
D-81541 München
© Infineon Technologies AG 1999
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices, please contact your nearest Infineon Technologies office in Germany or our Infineon Technologies representatives worldwide (see address list).

Warnings

Due to technical requirements, components may contain dangerous substances.
For information on the types in question, please contact your nearest Infineon Technologies office.

Infineon Technologies' components may only be used in life-support devices or systems with the expressed written approval of Infineon Technologies if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.