

		P F	ROPRIETARY ITEM - EXCEPT FOR US	ES EXPRESSLY ISCLOSED	C O I	UNICIOD WIDE	DATE	DRAWN	CHKD	SCALE	DRAWING NUME	BER
5	<u>oucn</u>		ROPRIETARY ITEM - EXCEPT FOR US RANTED IN WRITING INFORMATION D REON IS CONFIDENTIAL AND ALL R NO OTHERWISE ARE RESERVED BY SO	IGHTS PATENT JTHCO, INC.	COI	NNECTOR WIRE	IIDEC2006	GGG		2:1	J-EM-10-4	10
REV		DRAWN/CHK[PART NUMBER	MATERIAL	FINISH					MILLIMET	ERS
Α	IIDEC2006	GGG/MJS	PRN: P2006-1802	EM-10-40	SEE NOTES							
	+											
											\$ —	ΛЗ
											$\oplus \leftarrow \rightarrow$	PAPER
											THIRD ANGLE PROJECTION	SIZE




HIROSE ELECTRIC CO. LTD. CONNECTOR SOCKET 4POS 2MM DUAL CRIMP P/N DFII-4DS-2C 2. TERMINALS: HIROSE ELECTRIC CO. LTD. CRIMP SOCKET CONTACTS P/N DFII SERIES CONTACTS, TIN PLATED. 3. WIRE: 24 AWG STRANDED TINNED COPPER CONDUCTOR FLAMMABILITY: PASSES ULVW-I FLAME TEST OPERATING TEMPERATURE: -40 TO +80C PER UL 1571 OPERATING TEMPERATURE: -40 TO +8 PVC INSULATION, COLORS: RED, BLACK, WHITE, BLUE 4. CONNECTOR PINNOUT: PIN 1: WHITE PIN 2: RED PIN 3: BLUE PIN 4: BLUE PIN 4: BLACK PIN 3: BLUE PIN 4: BLACK 5. EACH WIRE END/COLOR SHALL HAVE THE FOLLOWING MARKERS: WHITE: 'IN' RED: '+ 12 V' BLUE: 'OUT' BLACK: 'GND' 6. WIRE ENDS ARE STRIPED AND TINNED THIS END. 7. MATERIALS COMPLY WITH ROHS DIRECTIVE.

NOTES: I. HOUSING:

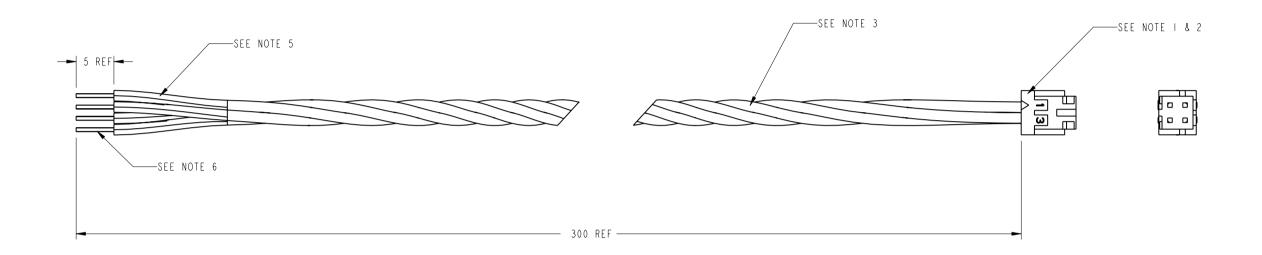





SCALE 5.000

SCALE 5.000