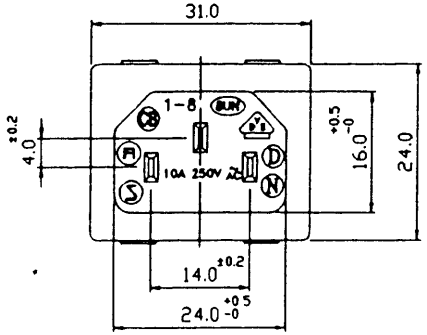

THICKNESS:
0.8~1.2(X=20.3)
1.3~2.0(X=20.5)



PANEL CUT-OUT

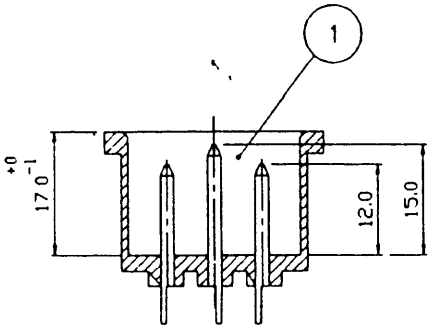





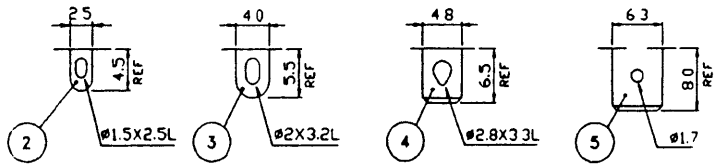

ALTERNATE TERMINAL

A: MATERIAL:
1.HOUSING: THERMOPLASTIC
2.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:
1.RATING: 15A 250V ~ NORTH AMERICA
10A 250V ~ EUROPE
2.INSULATION RESISTANCE: OVER 100MΩ 500VDC
3.DIELECTRIC STRENGTH: 2000V AC ONE MINUTE

C: APPROVALS:
UL,CSA,VDE,SEV,SEMKO,DEMKO,NEMKO,SETI & CB

D: ORDERING OPTION GUIDE:

ORDER#	ITEM REQ.	TERMINAL DIFFERENCE	CODE
0182-PS	① + ②	2.5mm/SOLDER TABS	-S
0182-PN	① + ③	4.0mm/SOLDER TABS	-N
0182-PQ	① + ④	4.8mm/.187" QD/SOLDER TABS	-Q
0182-PW	① + ⑤	6.3mm/.250" FAST-ON TABS	-W

E: SPECIFICATION:

ITEM	PART NO.	PART NAME	Q'TY	SPECIFICATION	MATERIAL	REMARKS
⑤	T-0182	TERMINAL	1SET	6.3X0.8T	COPPER ALLOY	TIN-PLATED
④	T-0182	TERMINAL	1SET	4.8X0.8T	COPPER ALLOY	TIN-PLATED
③	T-0182	TERMINAL	1SET	4.0X0.8T	COPPER ALLOY	TIN-PLATED
②	T-0182	TERMINAL	1SET	2.5X0.8T	COPPER ALLOY	TIN-PLATED
①	H-0182	HOUSING	1	SNAP-IN TYPE	THERMOPLASTIC	

724-865-0182-W

名稱	AC INLET 3P PUSH-IN MOUNTING			比例	1/1
材質	PA66	單位	M/M	第三角	
圖號	0182	核對		DIMENSION	ANGULAR
編號	LSA4	設計	K.D.WU 10-10 '94	0-6 ±0.1 6-30 ±0.2 30-120 ±0.3	±0.5°