
multicomp	PART NO.		REVISIONS								
		ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
		-	А	RELEASED	Jagan	14/10/09	Sridhar	14/10/09	Farnell	28/10/09	

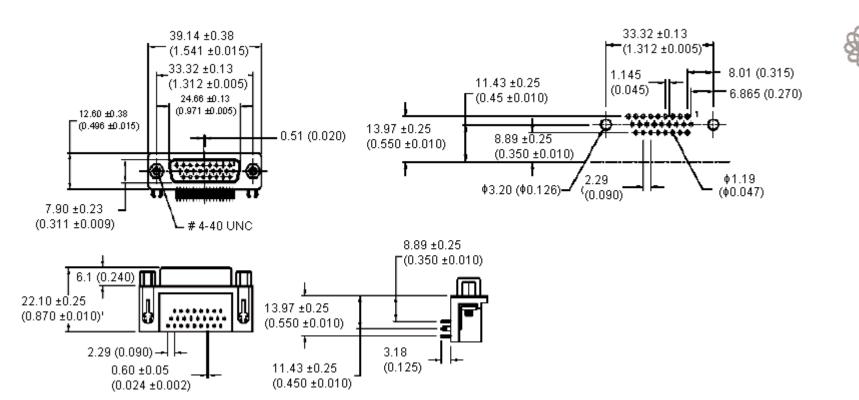

Dimensions : Millimetres (Inches)

RoHS

Compliant

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with-	UNLESS OTHERWISE	Jagan	14/10/09	D Su	ub Socket - HD, P	CB, RA, 26 Ways	
out notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this	SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	CHECKED BY:	DATE:	SIZE DWG NO.		ELECTRONIC FILE	REV
data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or		Sridhar	14/10/09	Δ	M10002419	1564253-DWG	A
childed Elability for loop of daring formally formation and formation		APPROVED BY:	DATE:				<u> </u>
		Farnell	28/10/09	SCALE: NTS	U.O.M.: mm (Inches)	SHEET: 1 O	0F 2

multicomp	PART NO.		REVISIONS								
		ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
•	SPC15293	-	Α	RELEASED	Jagan	14/10/09	Sridhar	14/10/09	Farnell	28/10/09	

Specifications:

•	
Shell	: Steel, nickel-plated over copper.
Insulator	: PBT + 30% fibre glass, black colour.
Contact	: Copper alloy, gold-plated on contact area tin-plated on dip solder tail.
Rivet	: Metal, nickel-plated.
Board-lock	: Brass, tin-plated.
Jack-screw	: Brass, nickel-plated.
Current rating	: 2 amperes.
Minimum insulation resistance	: 5000MΩ at 500V dc.
Minimum dielectric withstanding voltage	: 1000V ac for 1 minute.
Maximum contact resistance	: 20mΩ.
Working temperature	: -55°C to +105°C.

Part Number Table

Description	Part Number
Socket, D, High Density, PCB 26 Way	SPC15293

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with-	UNLESS OTHERWISE	Jagan	14/10/09	D) Sub Socket - HD, PC	CB, RA, 26 WAYS	
believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or	SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	CHECKED BY:	DATE:	SIZE DWG NO.		ELECTRONIC FILE	REV
		Sridhar	14/10/09	Δ	M10002419	1564251-DWG	A
		APPROVED BY:	DATE:				
		Farnell	28/10/09	SCALE: NTS	U.O.M.: mm (Inches)	SHEET: 2 OI	F 2