
EK-23132-000

SHT I.I

NOTE

I. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED  $TO \pm 0.17 [.007].$ 

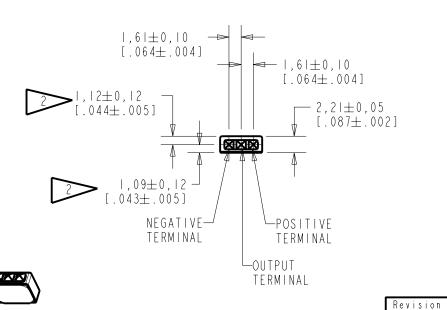

 $\emptyset$  0,51 $\pm$ 0,05

 $1,78\pm0,02$  $[.070\pm.001]$ (2 PLS.)

 $[.020 \pm .002]$ 

(6 PLS.)

 $3,99\pm0,02$  $[.157\pm.001]$ 

 $.02\pm0.02$ 

 $[.040\pm.001]$ 

(2 PLS.)

 $-5,56\pm0,02$ 

 $[.219 \pm .001]$ 

0.64 [.025] MAXIMUM SOLDER BUILDUP

Implementation Date

C.O. #

NOMINAL WEIGHT .13 GRAM

DIMENSIONS IN MILLIMETERS [INCHES]


**KNOWLES ELECTRONICS** ITASCA, ILLINOIS U.S.A.

| A                    | M10101029 | 2 - 28 - 06 | Release      | d              | Α               |
|----------------------|-----------|-------------|--------------|----------------|-----------------|
| SCALE:               | 2:1       |             |              | DR. BY         | DATE            |
| DO NOT SCALE DRAWING |           |             |              |                | 2-28-06<br>DATE |
| TITLE:               | MICF      | ROPHONE     | EK-23132-000 | GJP<br>APP. BY | 3-22-06<br>DATE |
|                      | OUTLI     | NE DRAWING  | SHT I.I      | GJP            | 3-22-06         |

RELEASE LEVEL

REVISION



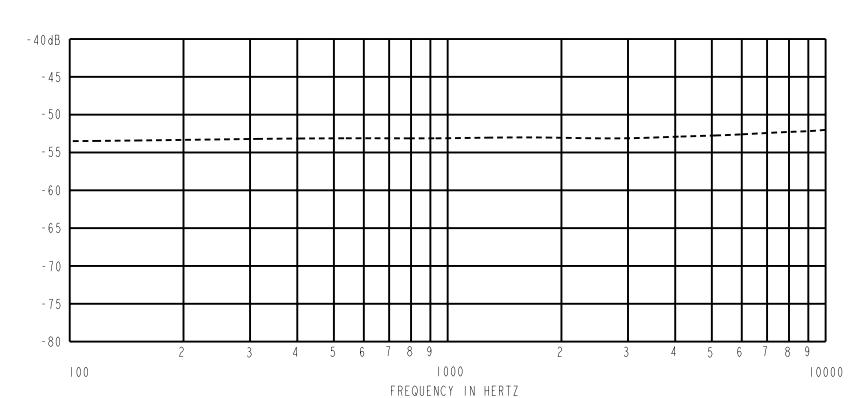

<u>SENSITIVITY</u>

 FREQUENCY
 MIN.
 NOM.
 MAX.

 100
 -- -53.5
 -- 

 1000
 -55.0
 -53.0
 -51.0

 10000
 -- -52.0
 --

DEVICE CONFORMITY

PANGE OF DEVIATION FROM IKHZ

-4.0 +1.0
0.0 0.0
-2.0 +5.0

## NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. OF 1000 Hz.
- 4. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.
- 5. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

| PORT     | DC     | AMPLIFIER     | SENSITIVITY CHANGE<br>ON REDUCING SUPPLY | "A" WEIGHTED NOISE | OUTPUT | IMPEDAN | CE OHMS | CAPA                  | CITANCE =             |                     |
|----------|--------|---------------|--|--------------------|--------|---------|---------|-----------------------|-----------------------|---------------------|
| LOCATION | SUPPLY | CURRENT DRAIN | TO 0.9VDC                                | (I kHz EQUIV. SPL) | MIN.   | NOM.    |         | OUTPUT TO<br>NEGATIVE | OUTPUT TO<br>POSITIVE | POS. TO<br>NEGATIVE |
| KA       | 1.3V   | 50 μA MAX.    | 3 dB MAX.                                | 26.0 dB MAX.       | 2800   | 4400    | 6800    | N/A                   | N/A                   | N / A               |

| Revision | C.O. #    | Implementation Date | RELEASE LEVEL | REVISION |
|----------|-----------|---------------------|---------------|----------|
|          |           |                     |               |          |
|          |           |                     | Released      | ι Δ      |
| А        | M10101029 | 2 - 28 - 06         | 11010000      | / \      |

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION PR. BY CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

TITLE: MICROPHONE EK-23132-000 GJP

PERFORMANCE SPECIFICATION

| ALSO REGULKED FOR | MMM     | 2-28-06 |  |
|-------------------|---------|---------|--|
|                   | CK. BY  | DATE    |  |
| -23132-000        | GJP     | 3-22-06 |  |
| 20102 000         | APP. BY | DATE    |  |
| SHT 2.1           | GJP     | 3-22-06 |  |

DATE