

DC axial fan

Series 7200 N 150 Ø x 55 mm




- **General description:** DC fan with electronically commutated external rotor motor. Commutation electronics completely integrated. Optional Vario-Pro: Highly flexible software configuration for the fan ensures an easily customizable solution to meet the individual requirements of your application.

- **Impeller material:** Fiberglass-reinforced PA plastic

- **Housing material:** Metal

Nominal data		Voltage	Voltage range VDC	Air flow	Speed	Power consumption	Sound level	Sound pressure level	Ambient temperature	L10 service life at 40 °C	L10 service life at max. temp.	Weight
Type	Motor	VDC	VDC	m³/h	1/min	W	Bel	dB(A)	°C	h	h	kg
7214 N	--	24	12 - 30	360	3050	12.0	6.2	50	-25 .. 72	80000	37500	0.725
Subject to modification												


Characteristic: Pressure over air flow

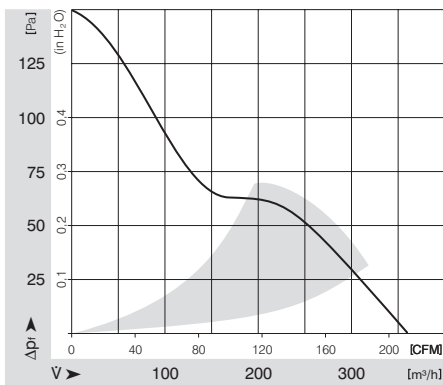

DC axial fan

Series 7200 N 150 Ø x 55 mm

Specific drawing

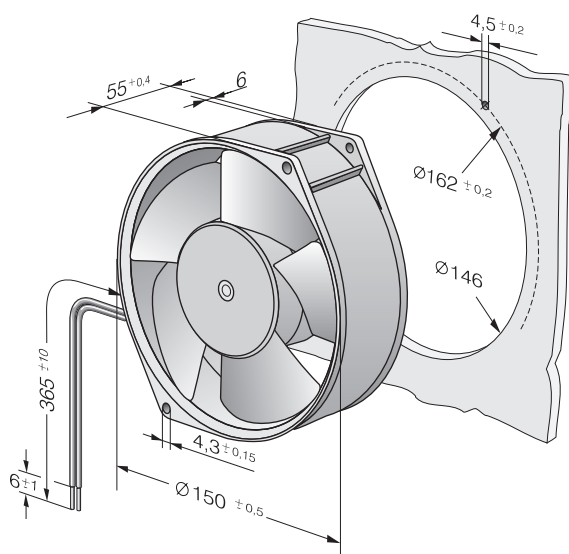

Technical description

- **General description:** DC fan with electronically commutated external rotor motor. Commutation electronics completely integrated. Optional Vario-Pro: Highly flexible software configuration for the fan ensures an easily customizable solution to meet the individual requirements of your application.

- **Housing material:** Metal

- **Direction of rotation:** Left, looking at rotor

- **Electrical connection:** 2 single strands AWG 22, TR 64. Housing with grounding lug for tapping screw M4 x 8 (TORX).

- **Blocking protection:** Electronic blocking protection

- **Option:** Vario-Pro fan, speed signal, alarm signal

- **Impeller material:** Fiberglass-reinforced PA plastic

- **Bearings:** Ball bearings

- **Direction of flow:** Air exhaust over bars

- **Motor protection:** With electronic reverse polarity protection. The fan runs only if the polarity is correct.

- **Approvals:** VDE, CSA, UL, CE

Contact

ebm-papst St. Georgen GmbH & Co. KG

Hermann-Papst-Straße 1

D-78112 St. Georgen

Phone +49 (0) 7724 / 81-0

Fax +49 (0) 7724 / 81-1309

info2@de.ebmpapst.com

www.ebmpapst.com