



Cabinet with glass door



Cabinet with vented door

Door Styles

Glass Doors are manufactured from $\frac{3}{16}$ " (4.7mm) thick tempered smoke gray tinted glass with 16 gauge (1.5mm) ventilated steel side trim.

Acrylic Doors are manufactured from 16 gauge (1.5mm) ventilated steel framework for rigidity with $\frac{3}{16}$ " (4.7mm) thick smoke gray tinted Acrylic panel.

Plain and Vented Steel Doors are manufactured from 16 gauge (1.5mm) steel. Vented doors are perforated and offer a 53% open area.

All doors have quick release hinges, grounding stud and two-point locking mechanisms. The locking rods are operated by a durable swing handle with a common key. If the application requires unique keying, please contact our customer service to discuss your specific needs.

Select door hinge location by facing respective door.

Hinge doors open 180° for maximum access to equipment and are reversible by flipping door (top to bottom) and rotating handle assembly 180°.

Note:

Doors with combination locks can be supplied on special request.



Acrylic door




Solid door



STEP 2 - Select Doors

Part Number for Configured Cabinet

A 47 8 1 A 1 L G V P P B 2 A

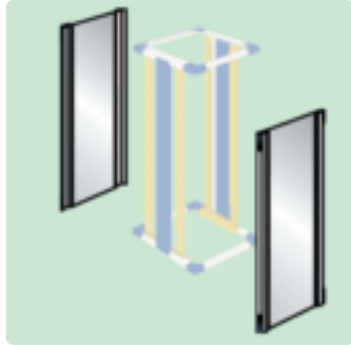

Front Door Options

G = Glass Left Hinge
A = Acrylic Left Hinge
V = Vented Left Hinge
S = Solid Left Hinge

Rear Door Options

H = Glass Right Hinge
B = Acrylic Right Hinge
W = Vented Right Hinge
T = Solid Right Hinge

N = No Door

Doors

Part Number for Doors Only

A GD 47 6 A

Product
A = Access

Door Style / Hinge Location
 GD = Glass Left Hinge
 AD = Acrylic Left Hinge
 VD = Vented Left Hinge
 SD = Solid Left Hinge
 HD = Glass Right Hinge
 BD = Acrylic Right Hinge
 WD = Vented Right Hinge
 TD = Solid Right Hinge

Usable U
 47
 42
 39
 32
 27

Width
 6 = 23⁵/₈" (600mm)
 8 = 31¹/₂" (800mm)

Color Code
 A = Light Gray with Blue Trim
 B = Black with Black Trim

Height Usable EIA Mtg. Units	Width		Part Number See Legend Above to Complete Part Number	Shipping Weight	
	in.	(mm)		lbs.	(kg)
Glass Door	23 ⁵ / ₈	600	A ___ 47 6	27.0	12.4
			A ___ 42 6	24.1	11.1
			A ___ 39 6	20.0	9.2
			A ___ 32 6	13.6	6.3
			A ___ 27 6	7.8	3.6
Acrylic Door	31 ¹ / ₂	800	A ___ 47 8	38.0	17.4
			A ___ 42 8	34.0	15.6
			A ___ 39 8	28.2	12.9
			A ___ 32 8	19.2	8.8
			A ___ 27 8	11.0	5.1

Height Usable EIA Mtg. Units	Width		Part Number See Legend Above to Complete Part Number	Shipping Weight	
	in.	(mm)		lbs.	(kg)
Vented Door	23 ⁵ / ₈	600	A ___ 47 6	41.1	18.9
			A ___ 42 6	41.1	18.9
			A ___ 39 6	34.1	15.6
			A ___ 32 6	23.2	10.7
			A ___ 27 6	13.3	6.1
Solid Door	31 ¹ / ₂	800	A ___ 47 8	58.0	26.6
			A ___ 42 8	51.8	23.8
			A ___ 39 8	43.0	19.7
			A ___ 32 8	29.3	13.4
			A ___ 27 8	16.8	7.7