
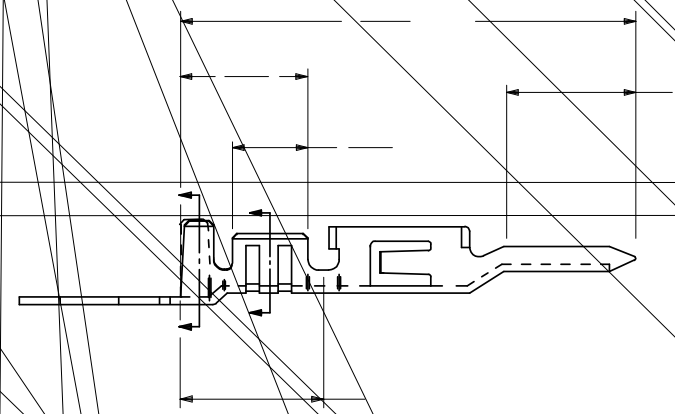


AWG:	MAX. INSULATION
20-24	.073/(1.85)
26-30	.050/(1.27)

43031-0001								
43031-0002								
43031-0003								.082/(2.08)
43031-0004	26-30							.020/(0.51) R. .065/(1.65)
43031-0005	26-30							.020/(0.51) R. .065/(1.65)
43031-0006	26-30							.020/(0.51) R. .065/(1.65)
								.090/(2.29) .100/(2.54) .030/(0.76) R. .075/(1.91) .082/(2.08)
								.090/(2.29) .100/(2.54) .030/(0.76) R. .075/(1.91) .082/(2.08)
								.090/(2.29) .100/(2.54) .030/(0.76) R. .075/(1.91) .082/(2.08)
	26-30							.020/(0.51) R. .065/(1.65)
	26-30							.020/(0.51) R. .065/(1.65)
	26-30							.020/(0.51) R. .065/(1.65)

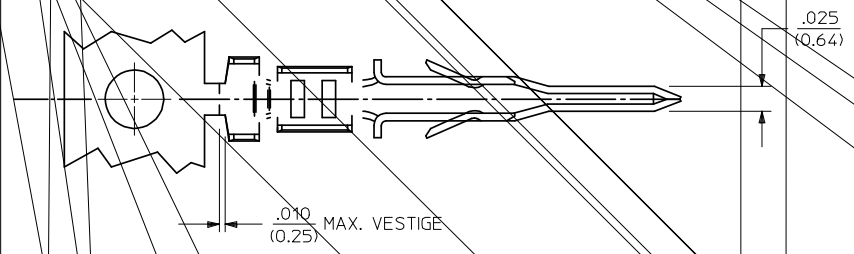

(SEE NOTE 9)

1) MATERIAL : PHOSPHOR BRONZE ALLOY

A = HGT TIN DIP: .000040/(0.00102) MIN.
 B = .000015/(0.00038) MIN. SELECT GOLD
 .000100/(0.00254) MIN. SELECT TIN
 OVER .000050/(0.00127) MIN. NICKEL
 C = .000030/(0.00076) MIN. SELECT GOLD
 .000100/(0.00254) MIN. SELECT TIN
 OVER .000050/(0.00127) MIN. NICKEL

3) PRODUCT SPECIFICATION : PS-43045, PS-43650, PS-44300-001

5) TERMINAL FOR USE IN MICRO FIT PLUG 43020-****, 43640-****, AND 44300-****.
 6) FOR TERMINAL ORIENTATION IN PLUG SEE DRAWING SDA-43020-****
 OR SD-43640-****.