

Approvals

UL Recognized 0.2A to 7A.

Electrical Characteristics:

Rated Current	1 In Minimum	2 In Maximum	3 In Maximum
0.2A to 7A	4 Hour	5 Second	0.2 Second

Environmental Temperature at 25°C

Interrupting Ratings:

50 amperes at 32V ac.

50 amperes at 63V dc.

Environmental Specifications:

Operating Temperature:

-55°C to +125°C.

Thermal Shock:

MIL-STD-202G, Method 213, Condition 1 (100G's peak for 6 milliseconds).


Vibration:

MIL-STD-202G, Method 204, Test Condition C.



Moisture Resistance:

MIL-STD-202G, Method 106, 10 day cycle.

Dimensions

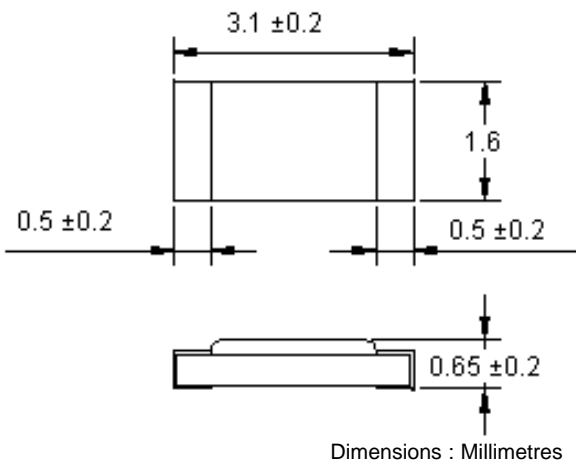

Recommended Land Pattern

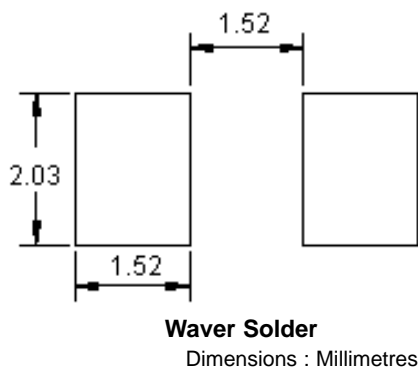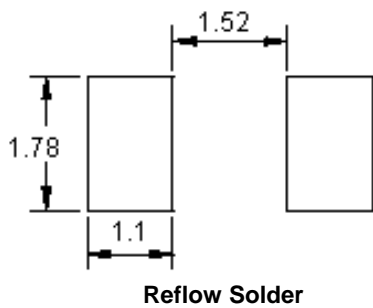



Materials:

Construction body material	: Ceramic.
Termination material	: Copper (Cu), Nickel (Ni), Tin (Sn).
Fuse element	: Copper (Cu), Tin (Sn).

Specification Table:

Description	Marking	Ampere Rating (In)	Voltage Rating (V)	Nominal Resistance Cold Ohms	Nominal Melting I ² t A ² Second	Part Number
Fuse, SMD, 1206, 0.2A	C	200mA	63V	2.300	0.001	MC12CF.200
Fuse, SMD, 1206, 0.25A	D	250mA		1.300	0.005	MC12CF.250
Fuse, SMD, 1206, 0.375A	E	375mA		0.650	0.010	MC12CF.375
Fuse, SMD, 1206, 0.5A	F	500mA		0.440	0.022	MC12CF.500
Fuse, SMD, 1206, 0.75A	G	750mA		0.250	0.036	MC12CF 750
Fuse, SMD, 1206, 1A	H	1A		0.125	0.052	MC12CF 001
Fuse, SMD, 1206, 1.25A	J	1.25A		0.083	0.083	MC12CF 1.25
Fuse, SMD, 1206, 1.5A	K	1.5A		0.051	0.195	MC12CF 1.50
Fuse, SMD, 1206, 1.75A	L	1.75A		0.043	0.263	MC12CF 1.75
Fuse, SMD, 1206, 2A	N	2A		0.036	0.488	MC12CF 002
Fuse, SMD, 1206, 2.5A	O	2.5A		0.027	0.524	MC12CF 2.50
Fuse, SMD, 1206, 3A	P	3A		0.022	0.758	MC12CF 003
Fuse, SMD, 1206, 4A	S	4A		0.015	0.933	MC12CF 004
Fuse, SMD, 1206, 5A	T	5A		0.011	1.032	MC12CF 005
Fuse, SMD, 1206, 7A	U	7A		0.007	2.555	MC12CF 007

Tape and Reel Specifications:

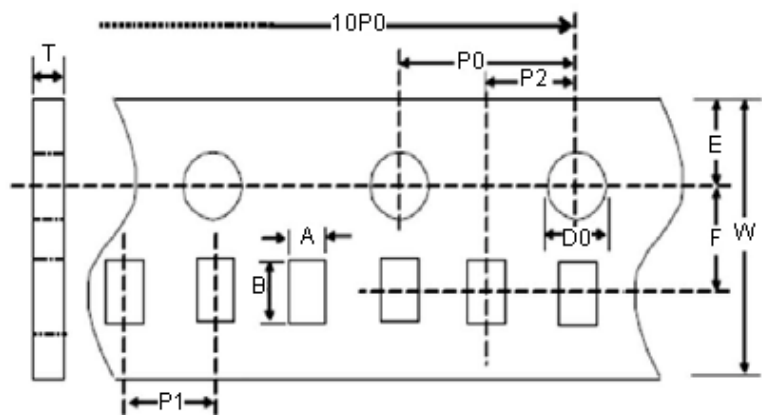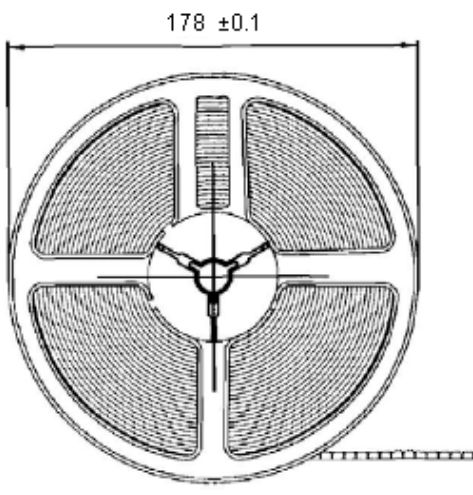

Dimensions : Millimetres

Item	A	B	W	E	F	P ₀	P ₁	P ₂	D ₀	T	10P ₀
Criterion	2.000	3.500	8.000	1.750	3.500	4.000	4.000	2.000	1.550	0.750	40.000
	0.050	0.050	0.100	0.050	0.050	0.100	0.100	0.050	0.050	0.030	0.100
	-0.050	-0.050	-0.100	-0.050	-0.050	-0.100	-0.100	-0.050	-0.050	-0.030	-0.100
Maximum	2.050	3.550	8.100	1.800	3.550	4.100	4.100	2.050	1.600	0.780	40.100
Minimum	1.950	3.450	7.900	1.700	3.450	3.900	3.900	1.950	1.500	0.720	39.900

Tape and Reel Quantity : 5000 pcs/reel.

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2010.