


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

7703-3

REVISIONS

ISSUE	CHANGES
0	ER 35425 KH 04/10/95
1	CN 37238 D KH 02/03/97

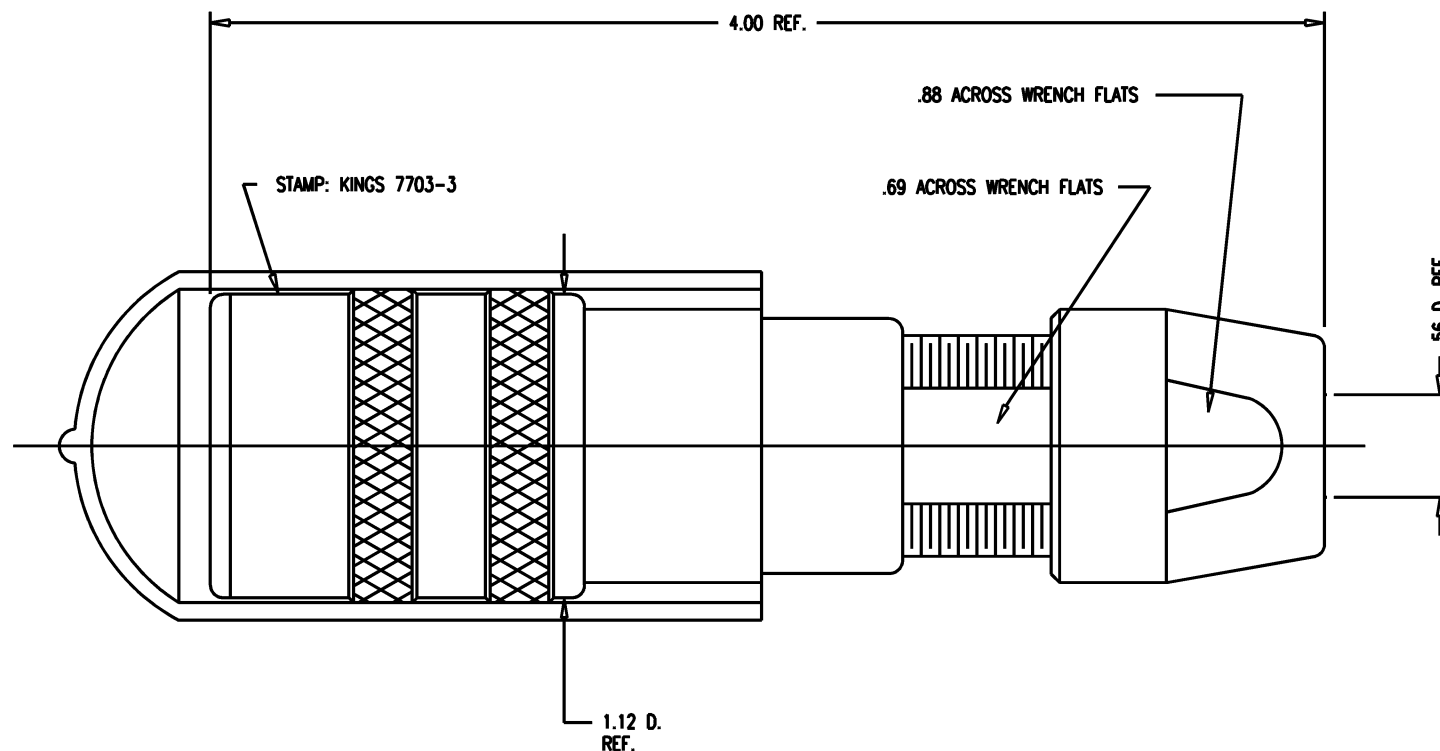

NOTES:

1. FOR USE WITH 740 CABLE GROUP.
2. FOR CABLING INSTRUCTIONS SEE KAI-8010.
3. FOR CABLE TRIMMING USE KTJ-303 AND KTD-303.
4. FOR CRIMPING USE DIE SIZE KTH-2041.
5. MATERIALS:
INSULATORS-TEFLON, ASTM-D-4894
GASKETS-SILICONE RUBBER, ZZ-R-765
CAP-VINYL
K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
CENTER CONTACT
OUTER CONTACT SPRING } BER. COP., ASTM-B-196
INSERT
ALL OTHER METAL PARTS-BRASS, ASTM-B16

6. FINISHES:
CENTER CONTACT } GOLD PLATE PER MIL-G-45204
OUTER CONTACT SPRING }
NUTS }
COLLET } KINGS TARNISH RESISTANT FINISH (TR-5)
BODIES }
ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
7. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC-500 MHZ
VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
INNER GROUND/OUTER GROUND: 500 VRMS

KAM5532

SCALE 2:1

APPROX SURFACE AREA

USED ON

REF: KP-8020-740-400

JK, TRI-LOC,
SERIAL DIGITAL

DRAWN	KH	DATE	04/10/95
DESIGN	DW	DATE	04/11/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

7703-3

GSD