

CHEMTRONICS®

Technical Data Sheet

TDS # 1620

Ultrajet® All-Way Duster

PRODUCT DESCRIPTION

Ultrajet® All-Way Duster is a new innovative all-way spray duster with the biggest blast to clean anything fast. This compressed gas duster can be sprayed right-side up and upside down emitting a high pressure blast that cleans electronics without scratching delicate surfaces.


- Filtered to 0.2 microns
- Biggest air blast of any non-CO₂ duster
- Ultrajet® All-Way sprays any direction, even upside down
- Ozone safe, CFC and HCFC Free
- High pressure for contamination control
- Nonabrasive and residue free
- Excellent material compatibility
- Penetrates hard to reach areas

TYPICAL APPLICATIONS

Ultrajet® All-Way is engineered for all aspects of electronic equipment maintenance and is particularly suited for applications involving:

- Audio/Video Equipment
- Computers and Other Electronic Equipment
- Lab Instruments
- Photo Equipment
- Printed Circuit Boards
- Surface Mount Devices

TYPICAL PRODUCT DATA AND PHYSICAL PROPERTIES

| | |
|---|---|
| Boiling Point | -15.7°F |
| Vapor Density (air=1) @ 77°F | 3.18 |
| Solubility in Water @ 77°F F/1 atm | 0.10% by weight |
| Specific Gravity (water = 1 @77°F) | 1.21 |
| Evaporation Rate (butyl acetate=1) | >1 |
| Appearance | Clear, Colorless Liquified Gas |
| Odor | Slight Ethereal |
| Surface Tension (dynes/cm @77°F) | 7.8 |
| Flash Point (TCC) | None |
| Shelflife | 5 years |
| RoHS/WEEE Status |  |

COMPATIBILITY

Ultrajet® All-Way is generally compatible with most materials used in printed circuit board fabrication, including sensitive plastics and compounds. As with any duster/cleaner, compatibility must be determined on a non-critical area prior to use.

| <u>Material</u> | <u>Compatibility</u> |
|-----------------|----------------------|
| Buna-N | Excellent |
| Graphite | Excellent |
| HDPE | Excellent |
| LDPE | Excellent |
| Lexan™ | Excellent |
| Neoprene | Excellent |
| Cross-Linked PE | Excellent |
| Polyacrylate | Excellent |
| Polystyrene | Excellent |
| PVC | Excellent |
| Silicone Rubber | Excellent |
| Teflon™ | Excellent |
| Viton™ | Excellent |

TECHNICAL & APPLICATION ASSISTANCE

Chemtronics® provides a technical hotline to answer your technical and application related questions. The toll free number is:

1-800-TECH-401.

ENVIRONMENTAL IMPACT DATA

| ENVIRONMENTAL IMPACT DATA | | | |
|---------------------------|------|-----|--------|
| CFC | 0.0% | VOC | 0.0% |
| HCFC | 0.0% | HFC | 100.0% |
| CL Solv. | 0.0% | ODP | 0.0 |

CFC, HCFC, CL. SOLV., VOC, and HFC numbers shown are the content by weight. Ozone depletion potential (ODP) is determined in accordance with the Montreal Protocol and U.S. Clean Air Act of 1990. The ODP of this product is 0.0. It is the sum of the ODP of the substances that may contribute to the depletion of stratospheric ozone, based upon the weight of each substance in the product's formulation.

NOTE:


This information is believed to be accurate. It is intended for professional end users having the skills to evaluate and use the data properly. CHEMTRONICS® does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.

MANUFACTURED BY:

ITW CHEMTRONICS
8125 COBB CENTER DRIVE
KENNESAW, GA 30152
1-770-424-4888

REV. F (06/06)

DISTRIBUTED BY:

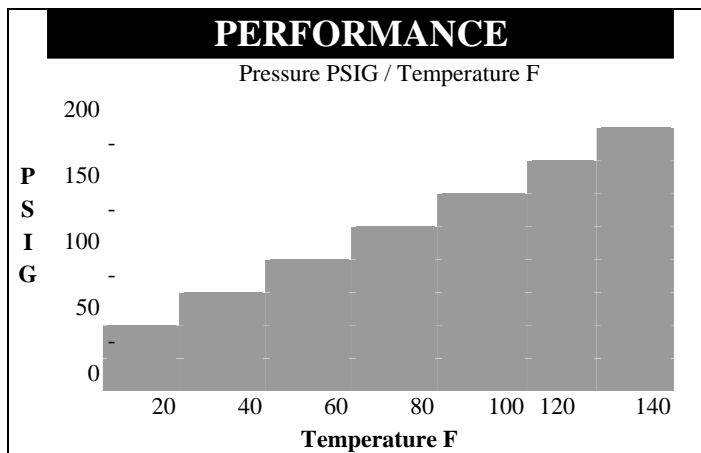

USAGE INSTRUCTIONS

For industrial use only.

Read MSDS carefully prior to use.

No special surface preparation is required prior to using Ultrajet® All-Way. Direct high pressure spray onto the area to be cleaned to remove dust, dirt and other contaminant. For optimum performance and pin point control, use with the attached extension tube.

AVAILABILITY

ES1620 8 oz. Aerosol