

your Position!

A1080-A Full NMEA GPS Modules

Optimized for Indoor and Battery Powered Applications

Developed for indoor use and based on the SiRF Star III low power chip, the A1080-A will benchmark not only sensitivity and power consumption. Being 100% compatible to Tyco Electronics A1037-A GPS module it will guarantee smallest footprint and easy implementation even in handheld devices and other size optimized battery powered applications.

Get your Evaluation Kit and check the outstanding performance of Tyco Electronics' A1080-A!

Bench marking sensitivity ■ -159 dBm tracking

Fastest TTFF (Time To First Fix) ■ < 35 s under cold start condition (typical)

Very small footprint ■ 19 x 16 mm

Ultra-low power consumption ■ Max. 50 mA during acquisition

A-GPS support For fastest start up behavior

SBAS support For most accurate position calculation



Performance

| · orrormanos | |
|-----------------------------------|------------------------|
| Channels | 20 parallel tracking |
| Correlators | 200,000 plus |
| Frequency | L1 – 1575 MHz |
| Sensitivity | |
| Tracking | -159 dBm |
| Acquisition (cold start) | -144 dBm |
| Position Accuracy | < 10 m CEP autonomous |
| | < 5 m CEP SBAS support |
| Time To First Fix | |
| Obscuration recovery ¹ | 1 s |
| Hot start ² | < 2 s |
| Warm start ³ | < 32 s |
| Cold ⁴ | < 35 s |
| | |

Communications

| Standard GPS Software | |
|-----------------------|---------------------------|
| NMEA Message | GGA, GSA, GSV, VTG, |
| Switchable | RMC, GLL |
| Baudrate (in baud) | 4,800 (default) to 38,400 |
| Serial Ports | 3.3 V CMOS compatible |
| Tx0 | NMEA output |
| Rx0 | NMEA input |

Environment

| Temperature | |
|-------------|----------------|
| Operating | -30°C to +85°C |
| Storage | -40°C to +85°C |
| Humidity | Non-condensing |

Power

| Input Voltage | 3.0 to 3.6 VDC |
|-----------------------------------|---------------------------|
| Current Draw | |
| Operation | < 52 mA (typical) |
| Standby | Supercap (for around 36h) |
| Antenna Supply | |
| via VANT | |
| Voltage range | up to 5.2 V |
| Max. allowed current ⁵ | 50 mA |

Mechanicals

| Dimensions | 19 mm x 16.2 mm x 2.0 mm |
|------------|--------------------------|
| | 0.75" x 0.64" x 0.08" |
| Weight | 1 g, < 0.05 oz |

¹⁾ The receiver's calibrated clock is not stopped, thus it knows precise time (to the µs level).

²⁾ The receiver has estimates of time/date/position and valid almanac and ephemeris data.


³⁾ The receiver has estimates of time/date/position and almanac.

⁴⁾ The receiver has no estimate of time/date/position, and no recent almanac

⁵⁾ An external current limiter is suggested to avoid damage in fault conditions.

Positioning Receiver Portfolio

With the mission of supporting our customers to implement GPS functionality into their systems, Tyco Electronics is offering a large product portfolio to cover almost all integration possibilities in an easy way. All GPS products are manufactured in our ISO9001 and TS16949 certified factory inside the EU. Beyond that our modules follow RoHS standard and are 100% electrically and functionally tested prior packaging. This way we constantly guarantee high quality products.

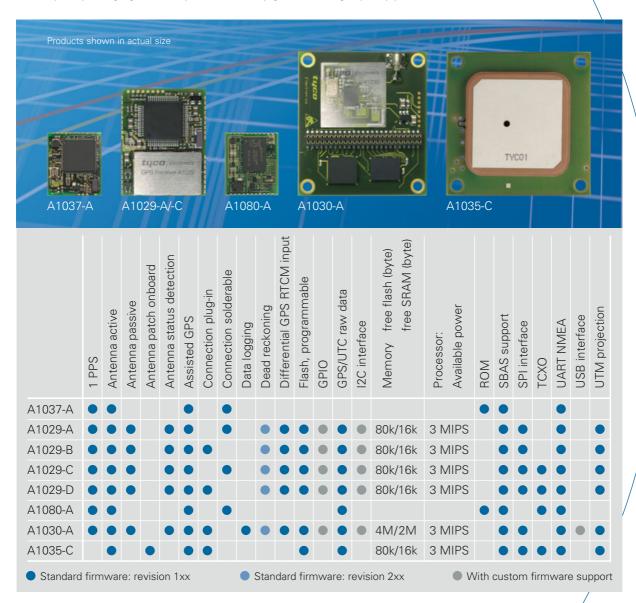

The information provided herein is believed to be reliable at press time. Tyoc Electronics Power Systems assumes no responsibility for inaccuracies or omissions. Tyoc Electronics Power Systems assumes no responsibility for the use of this information, and all such information shall be entirely at the users own risk. Prices and specifications are subject to change without notice. Tyoc Electronics Power Systems does not authorize or warrant any of its products for use in life-support devices and / or systems

Tyco Electronics Power Systems

Finsinger Feld 1 85521 Ottobrunn, Germany Tel.: +49 (0)89 6089-838 Fax: +49 (0)89 6089-835 gps@tycoelectronics.com www.tycoelectronics.com/gps

| Your | Partner |
|------|----------------|
| | |

