


Electronic Terminal Block with DC-DC Converter


1/1

Step Up Converter DC 12 V / DC 24 V

Data sheet

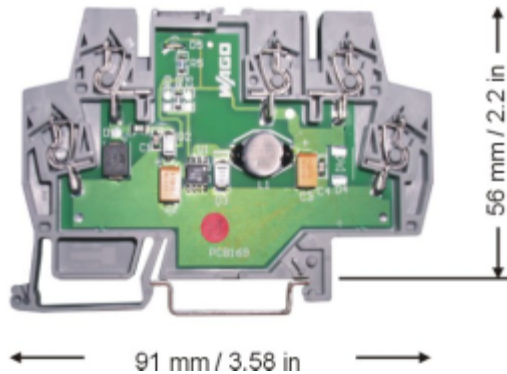

Similar photo

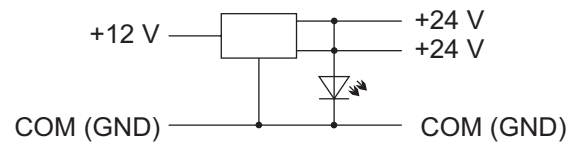

Description	Item-No.	Pack.-unit pcs																																																
DC/DC Converter 12 V / 24 V ; 250 mA	859-804	1																																																
<ul style="list-style-type: none"> End plate 859-525 included and attached. Mounting on DIN 35 rail. <p>Application:</p> <p>When industrial controls that typically require DC 24 V are used in remote locations, often only DC 12 V is available. This module can cost effectively produce DC 24 V at up to 250 mA from a 12 V source. This module has a wide input range to tolerate the variability of DC 12 V sources that may have a battery / charger based source. The converter design is highly efficient to conserve battery power.</p>	<p>Technical Data</p> <table border="1"> <tr><td>Input nominal voltage U_N</td><td>DC 12 V</td></tr> <tr><td>Input voltage range</td><td>DC 8-16 V</td></tr> <tr><td>Output voltage</td><td>DC 24 V</td></tr> <tr><td>Output voltage range</td><td>DC 24 V \pm 1 %</td></tr> <tr><td>Max. output current</td><td>250 mA</td></tr> <tr><td>Max. line regulation</td><td>0.5 % (from DC 8-16 V, full load)</td></tr> <tr><td>Max. load regulation</td><td>0.5 % (no load to full load, DC 12 V in)</td></tr> <tr><td>Efficiency</td><td>83 % <small>typ.</small> (DC 12 V in, full load)</td></tr> <tr><td>Output noise and ripple</td><td>40 mV P-P max (at bandwidth 20 MHz)</td></tr> <tr><td>Switching frequency</td><td>1.2 MHz (nominal)</td></tr> <tr><td>Isolation</td><td>Non-isolated</td></tr> <tr><td>Input polarity protection</td><td>Yes</td></tr> <tr><td>Minimum load requirements</td><td>None</td></tr> <tr><td>Max. Transient recovery time</td><td>50 μs (Recovery time for a step load change of 25 % to 75 % of full load)</td></tr> <tr><td>Max. start-up time</td><td>8 ms (DC 12 V in, full load)</td></tr> <tr><td>Max. hold-up time</td><td>0.5 ms (DC 12 V in, full load)</td></tr> <tr><td>Input protection</td><td>TVS Diode</td></tr> <tr><td>Output short circuit protection</td><td>Fused</td></tr> <tr><td>Temperature coefficient</td><td>100 ppm/$^{\circ}$C</td></tr> <tr><td>Ambient operating temperature</td><td>-25 $^{\circ}$C...+40 $^{\circ}$C</td></tr> <tr><td>Terminal block width</td><td>6 mm / 0.236 in</td></tr> <tr><td>Wire connection</td><td>CAGE CLAMP[®]</td></tr> <tr><td></td><td>0.08-2.5 mm² / AWG 28-14</td></tr> <tr><td>Stripped length</td><td>5-6 mm / 0.22 in</td></tr> </table>	Input nominal voltage U_N	DC 12 V	Input voltage range	DC 8-16 V	Output voltage	DC 24 V	Output voltage range	DC 24 V \pm 1 %	Max. output current	250 mA	Max. line regulation	0.5 % (from DC 8-16 V, full load)	Max. load regulation	0.5 % (no load to full load, DC 12 V in)	Efficiency	83 % <small>typ.</small> (DC 12 V in, full load)	Output noise and ripple	40 mV P-P max (at bandwidth 20 MHz)	Switching frequency	1.2 MHz (nominal)	Isolation	Non-isolated	Input polarity protection	Yes	Minimum load requirements	None	Max. Transient recovery time	50 μ s (Recovery time for a step load change of 25 % to 75 % of full load)	Max. start-up time	8 ms (DC 12 V in, full load)	Max. hold-up time	0.5 ms (DC 12 V in, full load)	Input protection	TVS Diode	Output short circuit protection	Fused	Temperature coefficient	100 ppm/ $^{\circ}$ C	Ambient operating temperature	-25 $^{\circ}$ C...+40 $^{\circ}$ C	Terminal block width	6 mm / 0.236 in	Wire connection	CAGE CLAMP [®]		0.08-2.5 mm ² / AWG 28-14	Stripped length	5-6 mm / 0.22 in	
Input nominal voltage U_N	DC 12 V																																																	
Input voltage range	DC 8-16 V																																																	
Output voltage	DC 24 V																																																	
Output voltage range	DC 24 V \pm 1 %																																																	
Max. output current	250 mA																																																	
Max. line regulation	0.5 % (from DC 8-16 V, full load)																																																	
Max. load regulation	0.5 % (no load to full load, DC 12 V in)																																																	
Efficiency	83 % <small>typ.</small> (DC 12 V in, full load)																																																	
Output noise and ripple	40 mV P-P max (at bandwidth 20 MHz)																																																	
Switching frequency	1.2 MHz (nominal)																																																	
Isolation	Non-isolated																																																	
Input polarity protection	Yes																																																	
Minimum load requirements	None																																																	
Max. Transient recovery time	50 μ s (Recovery time for a step load change of 25 % to 75 % of full load)																																																	
Max. start-up time	8 ms (DC 12 V in, full load)																																																	
Max. hold-up time	0.5 ms (DC 12 V in, full load)																																																	
Input protection	TVS Diode																																																	
Output short circuit protection	Fused																																																	
Temperature coefficient	100 ppm/ $^{\circ}$ C																																																	
Ambient operating temperature	-25 $^{\circ}$ C...+40 $^{\circ}$ C																																																	
Terminal block width	6 mm / 0.236 in																																																	
Wire connection	CAGE CLAMP [®]																																																	
	0.08-2.5 mm ² / AWG 28-14																																																	
Stripped length	5-6 mm / 0.22 in																																																	