

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
26	A	RELEASED	JAP	5/21/96	JC	8/23/96	BB	8/30/96






Electrical Characteristics

Primary
115v $\pm$ 10% REQ:
(50,60)Hz

Secondary
Series 12.6vct @1.0ARMS
Parallel 6.3v @ 2.0ARMS
REGULATION: 16.8% APPROX

Transformer Isolation
Pri/Sec 2500v
Sec/Sec 500v
Wind/Core 2500v

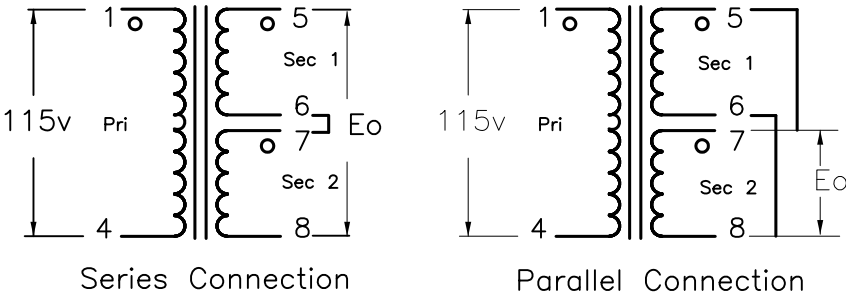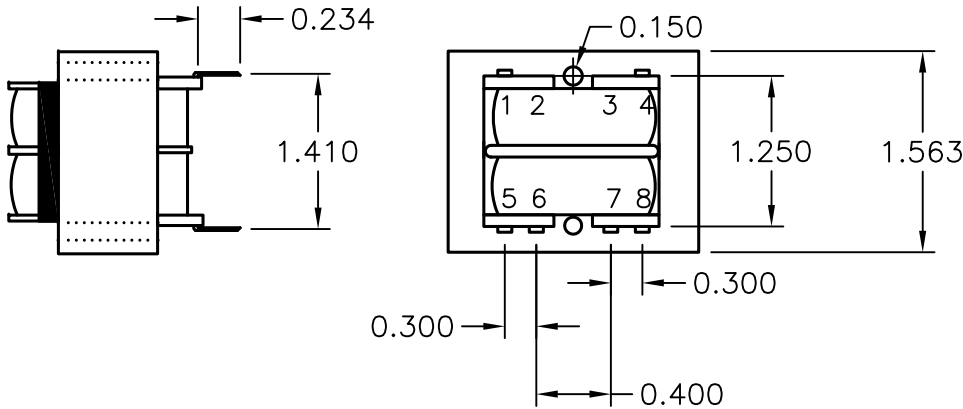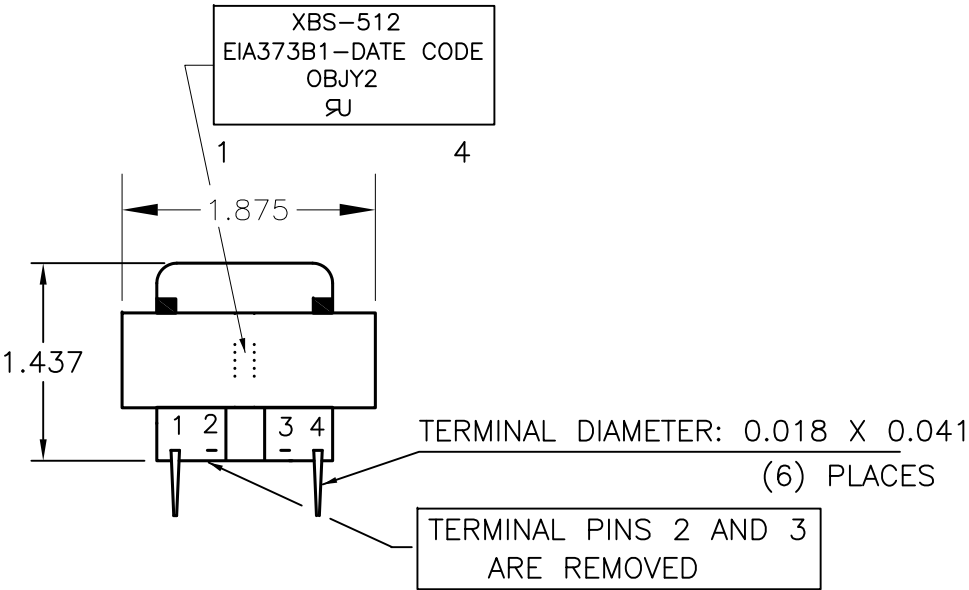

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:		
	JAP	5/21/96	PC Board Transformer		
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE
	JC	8/23/96	A	SPC20958	10M5562.dwg
	APPROVED BY:	DATE:	REV		
	BB	8/30/96	A		
SCALE: NTS		U.O.M.: INCHES [mm]		SHEET: 1 OF 1	