DWG. NO. SD-5275-NA

:MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

注記
NOTE

⚠1 全極数が偶数の場合のみ適用。
TO BE APPLIED ONLY WHEN ALL CKTS. ARE EVEN.

2 ウエハーの反りは、長さ 25.4 に対して0.2最大。
CAMBER MUST BE 0.2 MAX.PER 25.4.

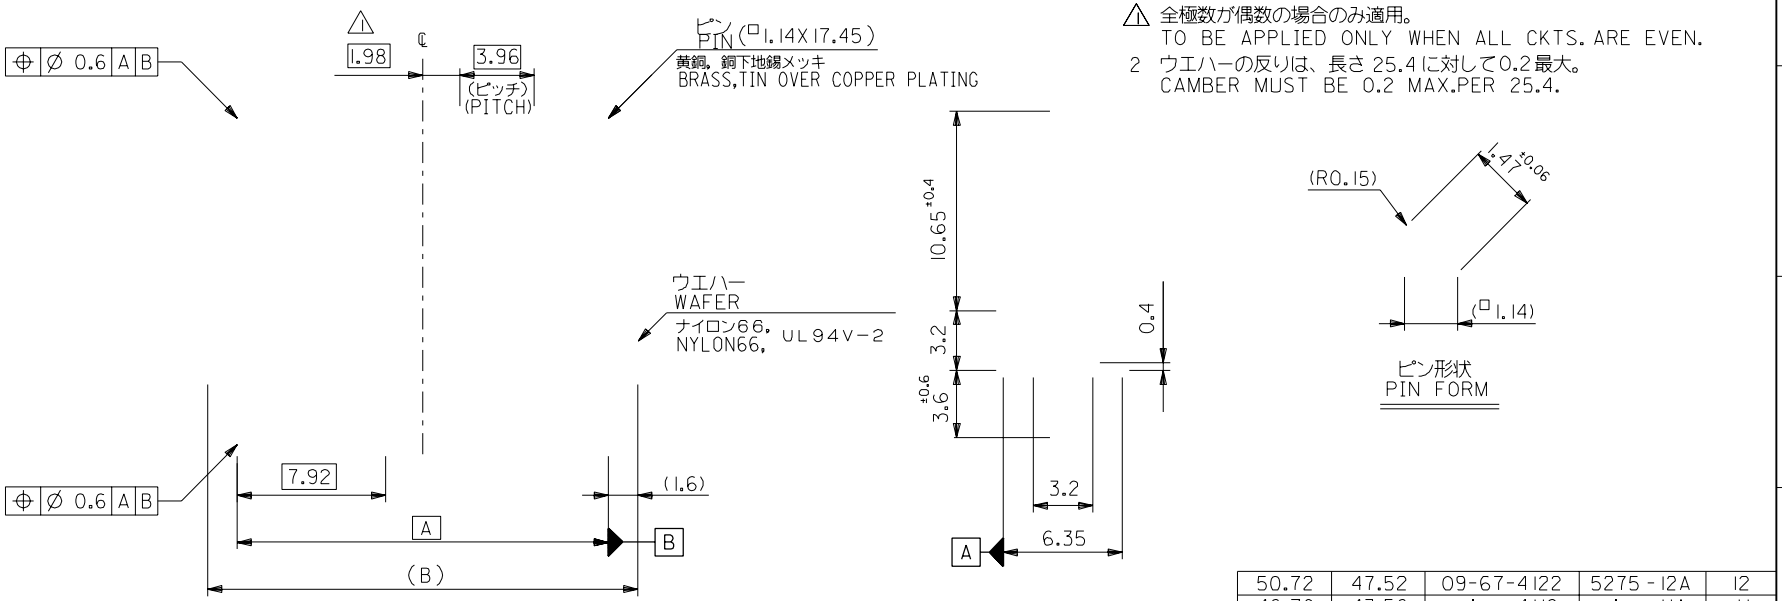

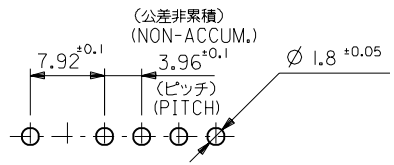

基板取付穴推奨寸法
RECOMMENDED P.C.B.HOLE DIMENSION

B	A	EDP NO.	ENG. NO.	極数 CKT.
50.72	47.52	09-67-4122	5275-12A	12
46.76	43.56	-4112	-11A	11
42.8	39.6	-4102	-10A	10
38.84	35.64	-4092	-09A	9
34.88	31.68	-4082	-08A	8
30.92	27.72	-4072	-07A	7
26.96	23.76	-4062	-06A	6
23	19.8	-4052	-05A	5
19.04	15.84	-4042	-04A	4
15.08	11.88	-4032	-03A	3
11.12	7.92	09-67-4022	5275-02A	2

ANGLE	±3°
30 OVER	±0.3
10 OVER 30 UNDER	±0.25
10 UNDER	±0.2
GENERAL TOLERANCES	

LTR	REVISION RECORD	DR.	CHK.	DATE
C	変更 REVISED (JC60666)	T.Y	S.K	'96/ 3/18
B	変更&再作図 (J40818) REVISED & REDRAWN	T.A	H.H	'94/10/5

MATERIAL 図中参照 SEE DRAWING
FINISH
WIRE RANGE
INS. RANGE
DRAWN BY '94/10/6 T.ASAKAWA
CHK'D BY '96/ 3/19 S.A S.KUNISHI
APP'D BY '96/ 3/19 S.KUNISHI
SCALE

MOLEX-JAPAN CO.,LTD.
REVISE ONLY ON CAD SYSTEM
TITLE
KK 3.96/7.92
WAFER ASS'Y
DWG. NO. SD-5275-NA
REV C

5275.S13

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EN-0IC(032)MXJ-32