

DWG. NO. SD-5197-N

E




D

C

B

A

MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

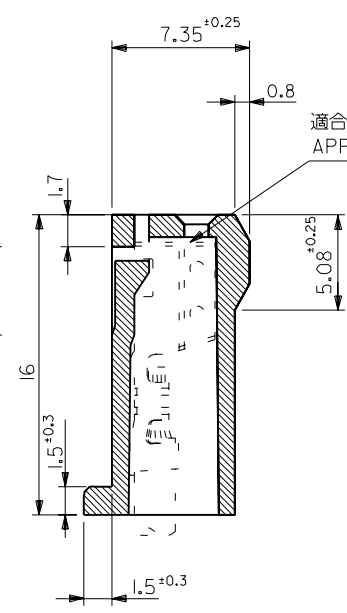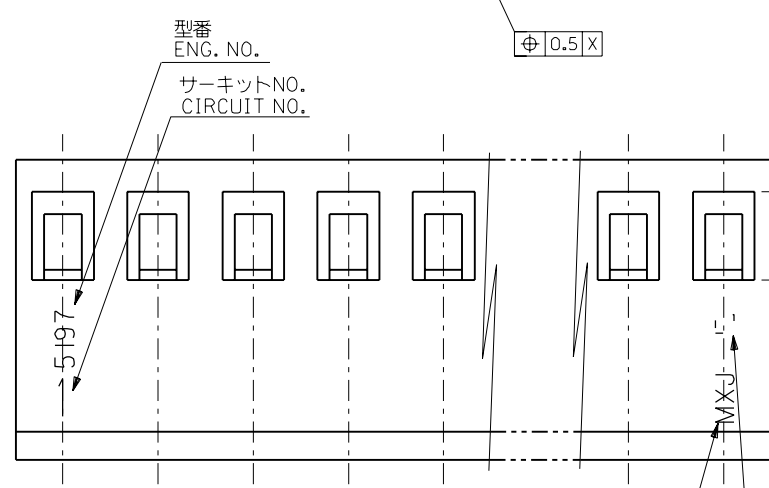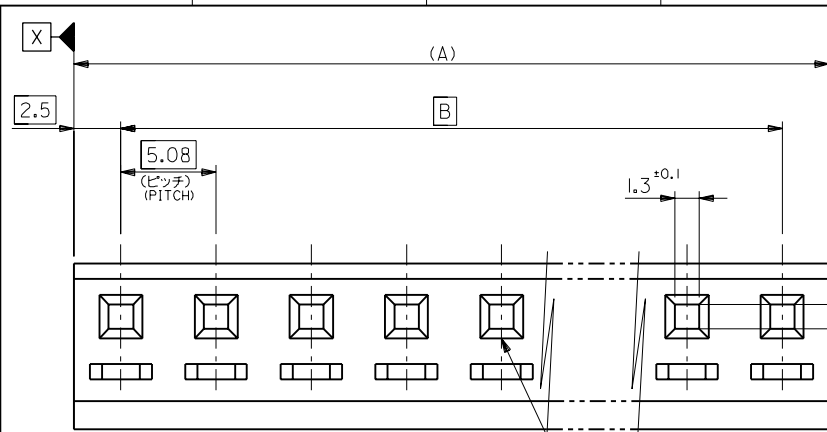

注記  
NOTES

1. 各部の反りは0.5最大。  
CAMBER : 0.5 MAX.
2. サーマイトNO.はNO."1"のみ表示。  
CIRCUIT NO. : 1 ONLY.

⊕ 0.5 X

トレードマーク  
TRADE MARK

キャビティマーク  
CAVITY MARK

40.64	45.64	10-01-3096	5197-09	9
35.56	40.56	-3086	-08	8
30.48	35.48	-3076	-07	7
25.4	30.4	-3066	-06	6
20.32	25.32	-3056	-05	5
15.24	20.24	-3046	-04	4
10.16	15.16	-3036	-03	3
5.08	10.08	10-01-3026	5197-02	2
B	A	EDP. NO.	ENG. NO.	種数 NO. OF CRIS.

材料 MATERIAL	ナイロン66, UL94V-2 NYLON66, UL94V-2	MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社
仕上げ FINISH	—	
適用電線範囲 WIRE RANGE	—	REVISE ONLY ON CAD SYSTEM
被覆外径 INS. RANGE	—	TITLE 名称
DRAWN BY '96/05/24 M.TANAKA REDDRAWN (JC70474) M.F. APP'D BY '96/05/24 M.ENOMOTO		CHK'D BY '96/05/24 M.FUKUSHIMA
DWG. NO. SD-5197-N		REV G

角度 ANGLE	±3°
30以上 OVER	+0.3
10以上 30未満 OVER UNDER	+0.25
10未満 UNDER	+0.2
一般公差 GENERAL TOLERANCES	
記号 LTR	変更内容 REVISION RECORD
DR. / CHK.	日付 DATE