


3.40

3.10

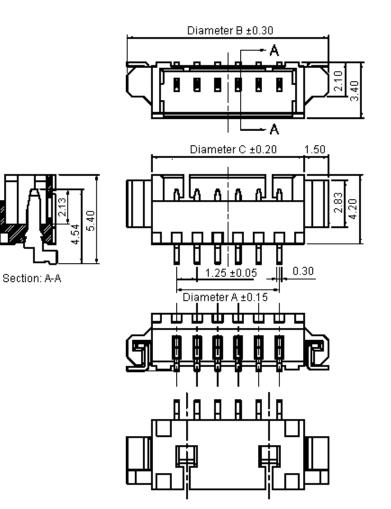

Specifications:

Current rating Voltage rating Maximum contact resistance Minimum insulation resistance Withstanding resistance Operating temperature range **Material and Finish:** Insulator

Contact

Plated

- : 1.0A ac/dc.
- : 125V ac/dc.
- : **20**mΩ.
- : 100MΩ.
- : 250V ac for one minute.
- : -40°C to +85°C.
- : High temperature plastic.
- : Copper alloy.
- : Tin plated.


Dimensions : Millimetres

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability reoluting throw here the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell plc 2008.

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:	DRAW	ING TITLE:								
Veena	01/08/08	Right Angle Header - 4 Way									
CHECKED BY:	DATE:	SIZE	DWG NO.		ELECTRONIC FILE BEV						
Suresh	01/08/08	A	birane.	M10001472		251R-XX-SM1_3_DWG					
APPROVED BY:	DATE:	I									
G.Cook	15/08/08	SCAL	.E: NTS	U.O.M.: mm	SHEET: 1 OF 3						

multicomp	PART NO.		REVISIONS							
	1251R-04-SM1	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		-	А	RELEASED	Veena	01/8/08	Suresh	01/8/08	G. C	15/8/08



PCB Layout

Dimensions : Millimetres


Specification Table

Number of Positions

Number of Positions	Α	В	С	Part Number
4P	3.75	9.75	6.75	1251R-04-SM1

Dimensions : Millimetres

Part Number Explanation:



: 04 = 4 Positions.

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

Information purposes in connection with the products to which it relates to information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with- out notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or ornision from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any relance on the Information or	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:				
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	Veena	01/08/08	Right Angle Header - 4 Way				
		CHECKED BY:	DATE:	SIZE DWG NO.	,	ELECTRONIC FILE	REV	
		Suresh	01/08/08	Δ	M10001472	251R-XX-SM1_3_DWG	A	
		APPROVED BY:	DATE:					
or restrict the Group's liability for death or personal injury resulting from its negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell plc 2008.		G.Cook	15/08/08	SCALE: NTS	U.O.M.: mm	SHEET: 2 OI	F 3	