

# Cree® SMD LED

## Model # LM1-EPG1-01-N2

### Data Sheet

120-degree, 3.2 x 2.7 mm, SMT LED in green color with water-transparent lens

#### Applications

- Indicators
- Illuminations
- LCD Back Lights
- Automobile Applications
- Pure-Green Color Displays

#### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ )

| Items                                  | Symbol     | Absolute Maximum Rating | Unit |
|--|------------|-------------------------|------|
| Forward Current                        | $I_F$      | 25                      | mA   |
| Peak Forward Current <sup>Note 1</sup> | $I_{FP}$   | 100                     | mA   |
| Reverse Voltage                        | $V_R$      | 5                       | V    |
| Power Dissipation                      | $P_D$      | 100                     | mW   |
| Operation Temperature                  | $T_{opr}$  | -40 ~ +100              | °C   |
| Storage Temperature                    | $T_{stg}$  | -40 ~ +100              | °C   |
| Junction Temperature                   | $T_J$      | 110                     | °C   |
| Junction/Ambient <sup>Note 2</sup>     | $R_{THJA}$ | 450                     | °C/W |
| Junction/Solder Point                  | $R_{THJS}$ | 300                     | °C/W |

#### Notes:

1. Pulse width  $\leq 0.1$  msec, duty  $\leq 1/10$ .
2. Rth test condition: mounted on PCB FR4 (pad size  $\geq 16$  mm<sup>2</sup>)

#### Typical Electrical & Optical Characteristics ( $T_A = 25^\circ\text{C}$ )


| Characteristics     | Symbol          | Condition     | Unit          | Minimum | Typical | Maximum |
|---------------------|-----------------|---------------|---------------|---------|---------|---------|
| Forward Voltage     | $V_F$           | $I_F = 20$ mA | V             |         | 3.4     | 4.0     |
| Reverse Current     | $I_R$           | $V_R = 5$ V   | $\mu\text{A}$ |         |         | 10      |
| Luminous Intensity  | $I_V$           | $I_F = 20$ mA | mcd           | 560     | 900     |         |
| Dominant Wavelength | $\lambda_D$     | $I_F = 20$ mA | nm            | 520     | 527     | 540     |
| 50% Power Angle     | $2\theta_{1/2}$ | $I_F = 20$ mA | deg           |         | 120     |         |

## Standard Bins for LM1-EPG1-01-N2 ( $I_f = 20 \text{ mA}$ )

Lamps are sorted to luminous intensity ( $I_v$ ) and dominant wavelength ( $\lambda_d$ ) bins shown.

Orders for LM1-EPG1-01-N2 may be filled with any or all bins contained as below.

All luminous intensity ( $I_v$ ) and dominant wavelength ( $\lambda_d$ ) values shown and specified are at  $I_f = 20 \text{ mA}$ .

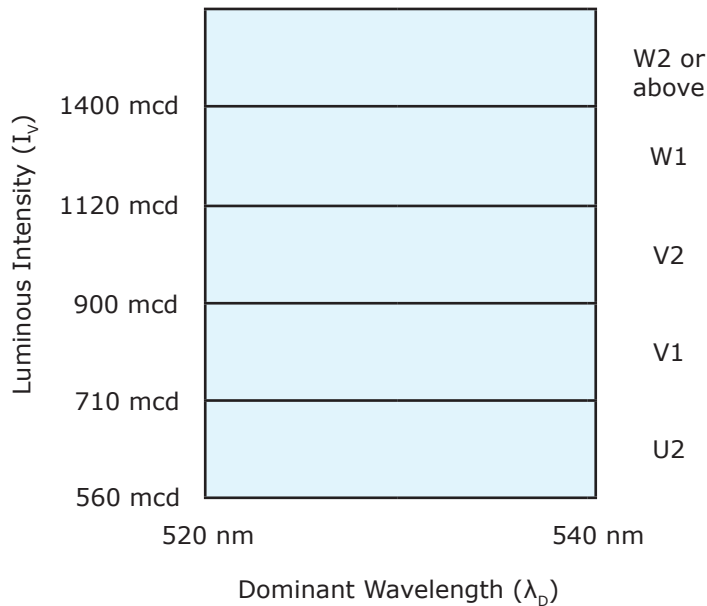

### Important Notes:

1. All ranks will be included per delivery; rank ratio will be based on the dice distribution.
2. Tolerance of measurement of luminous intensity is  $\pm 10\%$ .
3. Tolerance of measurement of the dominant wavelength is  $\pm 1 \text{ nm}$ .
4. Tolerance of measurement of  $V_f$  is  $\pm 0.05 \text{ V}$ .
5. Packaging methods are available for selection; please refer to the "Cree LED Lamp Packaging Standard" document.
6. Please refer to the "Cree LED Lamp Reliability Test Standards" document for reliability test conditions.
7. Please refer to the "Cree LED Lamp Soldering & Handling" document for information about how to use this LED product safely.
8. Do not handle the device by the SMD surface. Care must be taken to avoid damage to the SMD surface or the interior of the device, which can be damaged by excessive force to the SMD surface.

**Graphs**

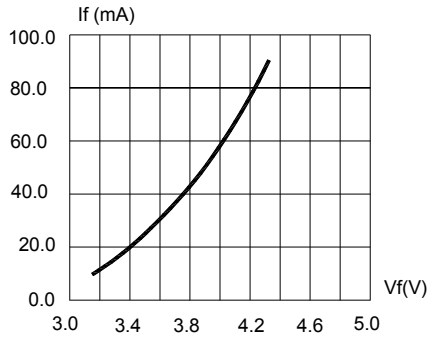


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

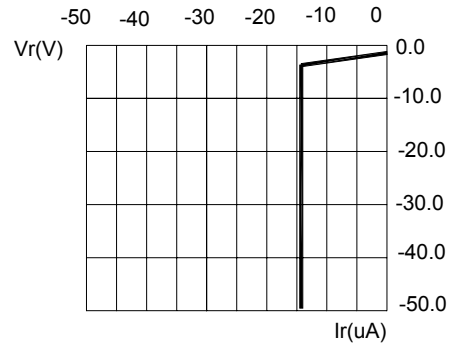


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

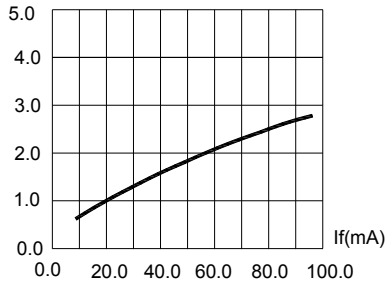


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

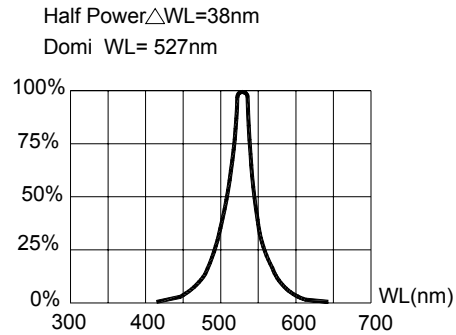


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

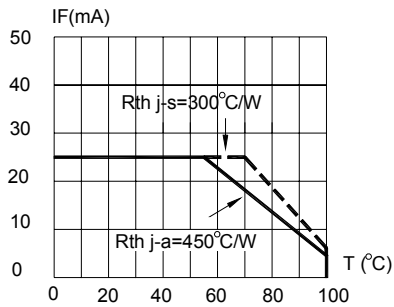


FIG.5 MAXIMUM FORWARD DC CURRENT VS TEMPERATURE. DERATING BASED ON Tjmax=110°C


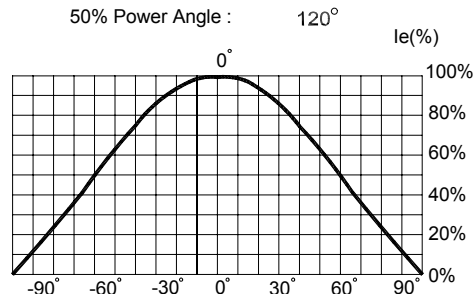


FIG.6 FAR FIELD PATTERN

## Mechanical Dimensions

All dimensions are in mm.

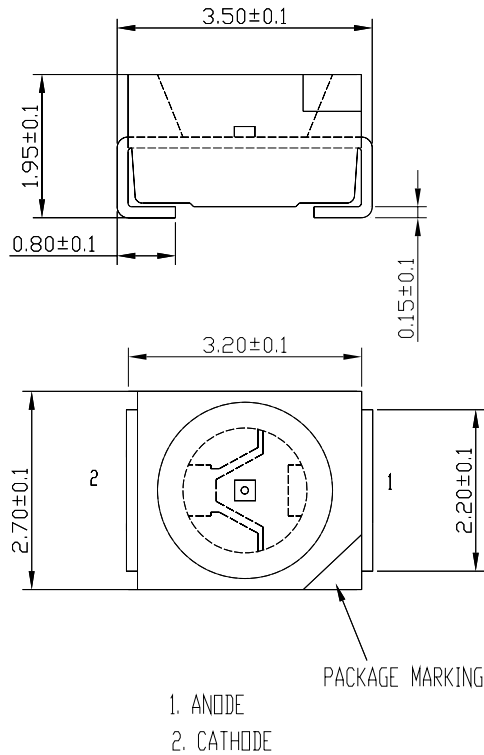

## Notes

### RoHS Compliance

The levels of environmentally sensitive, persistent biologically toxic (PBT), persistent organic pollutants (POP), or otherwise restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS), as amended through April 21, 2006.


### Vision Advisory Claim

Users should be cautioned not to stare at the light of this LED product. The bright light can damage the eye.

## Kit Number System

Cree LED lamps are tested and sorted into performance bins. A bin is specified by ranges of color, forward voltage, and brightness. Sorted LEDs are packaged for shipping in various convenient options. Please refer to the "Cree LED Lamp Packaging Standard" document for more information about shipping and packaging options.

Cree LEDs are sold by order codes in combinations of bins called kits. Order codes are configured in the following manner:

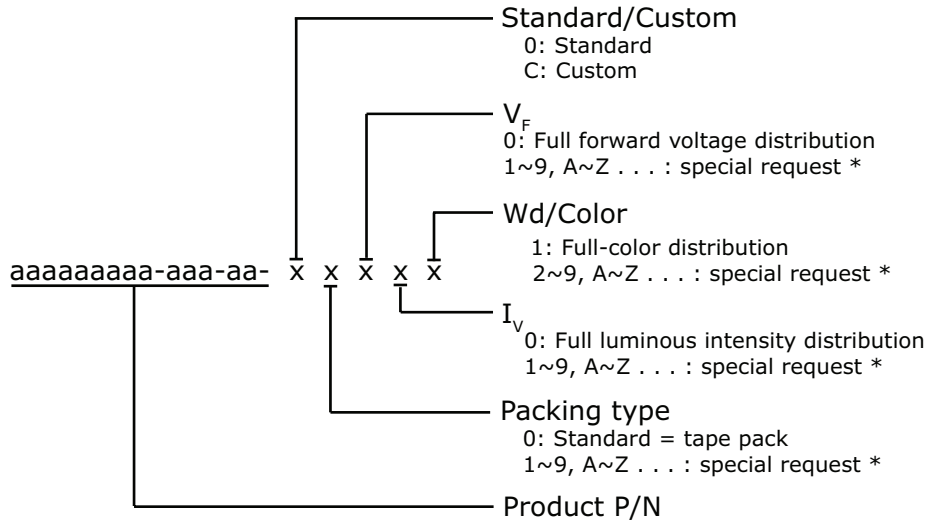

\* Contact your Cree sales representative for ordering information.

## Standard Available Kits\*

| Kit Number           | Description                                      |
|----------------------|--|
| LM1-EPG1-01-N2-00001 | SMD 120 Pure Green 527nm, FULL RANK, Tape & Reel |

\* Please contact your Cree representative about the availability of non-standard kits.