



PHASE ANGLE ELECTRONIC HEAT SWITCH
15A MAXIMUM
WITH RFI SUPPRESSION

QLC/TB-RFI

X10251

INTRODUCTION

These switched phase angle power regulators are robust and compact units ideal for controlling single/phase mains driven loads. The standard QLC units are for 230V supply, with an integral three position and off control switch with wiring connections to the plug-in five way terminal. The large triac enables the unit to handle high inrush current with ample safety margins on industrial installations. These units incorporate their own RFI filter network to comply with EMC Regulations (Class A).

APPLICATIONS

Suitable for quartz lamps, conventional resistive heating elements in single phase, series or parallel configurations to the specified voltage, current and temperature limits and inductive loads, for example, transformers and motors.

FEATURES

- Integral RFI network.
- Plug in power connector block.
- Single hole fixing.
- Rugged and compact.
- Designed to maximise thermal dissipation.



**RoHS Compliant
 Directive
 2002/95/EC**



INSTALLATION

DIMENSIONS, WIRING CONNECTIONS & OUTPUTS


POSITION	AC O/P LOADED VOLTS (RMS typical)
0	ZERO
1	173
2	193
3	SUPPLY

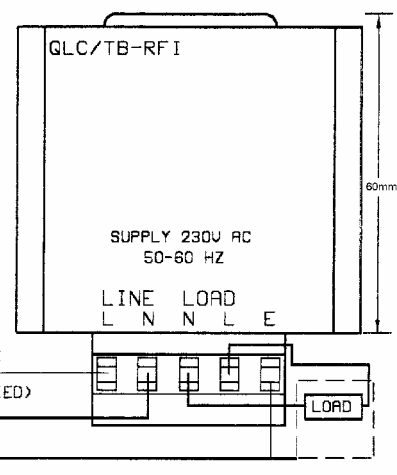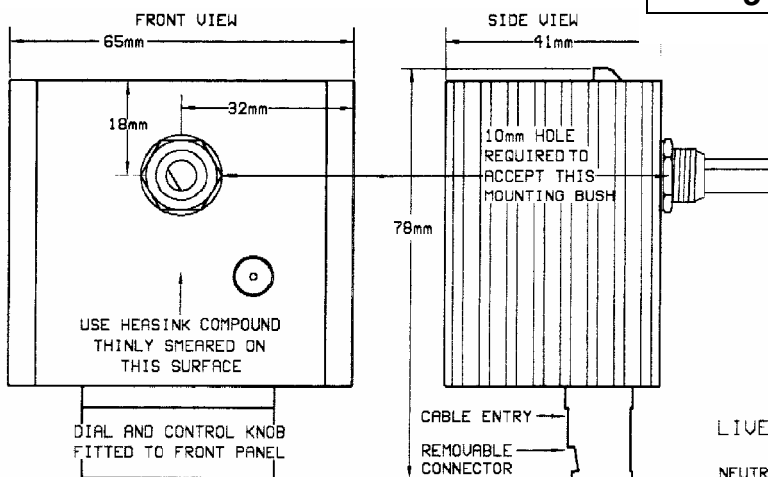

WARNING
 LIVE TERMINALS - SWITCH OFF SUPPLY BEFORE COMMENCING ANY SERVICE WORK

NOTE
 FOR HEATSINK PANEL MOUNTING A 10MM HOLE IS REQUIRED TO ACCEPT MOUNTING BUSH.
 HEATSINK COMPOUND MUST BE USED FOR EFFECTIVE THERMAL COUPLING.

INSTALLATION

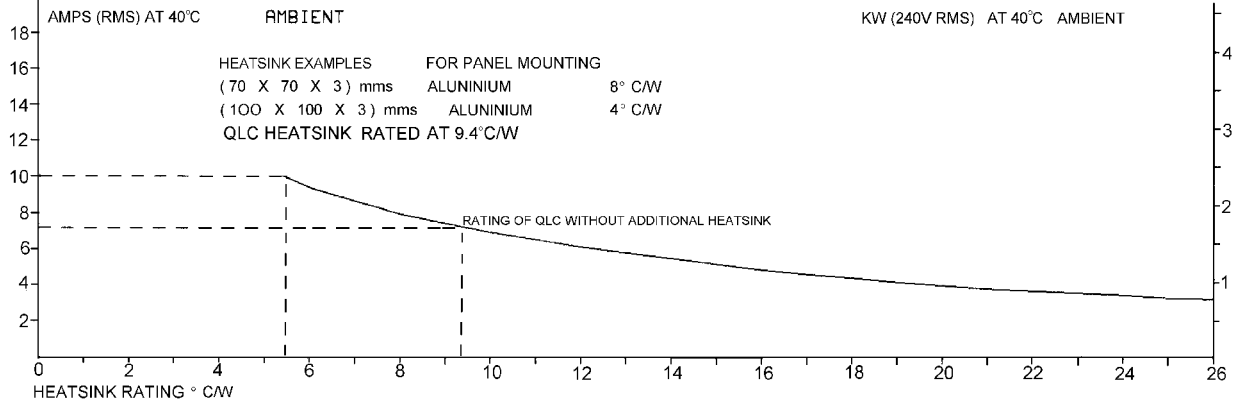

WITH HEATSINK RATING AS SPECIFIED THE MAXIMUM LOAD CURRENT CAN BE DETERMINED
THIS IS THE MAXIMUM LOAD CURRENT POSSIBLE WITHOUT EXCEEDING THE DEVICE RATINGS

SPECIFICATIONS AND DIMENSIONS

Unit limiting RMS, On state current	15A	Maximum forward voltage drop at 15A	1.5V
Triac Limiting RMS, On state current	25A	Peak one cycle surge @ (10ms)	320A
Mains supply, tolerance, within 10%	230V ac	I ² t limiting value for fusing	112A ² s
Isolation voltage	2500V rms	Mains frequency	50/60Hz
Max recommended operational temperature	65°C	Max recommended storage temperature	65°C
<i>Dimensions approximate</i>			
Shaft diameter	6.3 mm (1/4")	Bush length	5 mm
Shaft projection from bush	30 mm	Fixing hole diameter	10mm

FUSING

It is recommended to use semiconductor (fast acting) type fuses or circuit breakers (Semiconductor-MCB) for protection. On initial 'switch on' some loads may need an increased Factor of Safety (F of S) for Unit and/or Device protection. See SRA Data sheet for further information.

CE MARKING

This product family carries a "CE" mark and incorporates a filter (Standard type to emission levels BS EN 55022 Class A - Industrial) to address the EMC directive. For information see recommendation section and contact our sales desk. (See Declaration of Conformity).

RECOMMENDATIONS

Other documents available on request, which may be appropriate for your application: -

CODE	IDENTITY	DESCRIPTION
X10229	RFI	Single Phase Filtering recommendations - addressing EMC Directive
X10213	ITA	Interaction, uses for phase angle and for burst fire control.
X10255	SRA (LVD)	Safety requirements - addressing the Low Voltage Directive including: - Thermal data/cooling; "Live" parts warning & Earth requirements; Fusing recommendations.
	AP02/4	COS UAL Conditions of sale.

NOTE It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.E. wiring regulations (BS7671) by suitably qualified/trained personnel. The regulations contain important requirements regarding safety of electrical equipment (For International Standards refer to I.E.C/ directive IEC 950).

ORDER CODE:

State part number: QLC/TB RFI. (Other voltage inputs and outputs available)
Optional extras include: Knob, Dial, Heatsink compound.



UNITED AUTOMATION LIMITED

1 Southport Business Park
Kew
Southport, PR8 4HQ
ENGLAND

Tel: 0044 (0) 1704 – 516500 Main
Tel: 0044 (0) 1704 – 516516 Sales
Fax: 0044 (0) 1704 – 516501
Enquiry@united-automation.com
www.united-automation.com

Page No. 2 of 2 Issue 3

Date 11/07/00



This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.