



Panasonic
ideas for life

**Compact DIP (2 Form A)
8-pin type.
Controls load voltage
60V to 600V.**

**GU PhotoMOS
(AQW21O)**

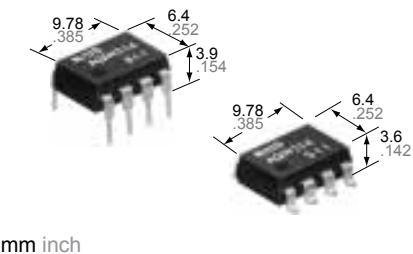

mm inch



FEATURES

1. Compact 8-pin DIP size

The device comes in a compact (W) 6.4 × (L) 9.78 ×(H) 3.9 mm (W) .252×(L) .385×(H) .154 inch, 8-pin DIP size (through hole terminal type).

2. Applicable for 2 Form A use as well as two independent 1 Form A use

3. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

4. High sensitivity, high speed response

Can control a maximum 0.13 A load current with a 5 mA input current. Fast operation speed of 310 µs (typical). (AQW214)

5. Low-level off state leakage current

The SSR has an off state leakage current of several milliamperes whereas the PhotoMOS relays has typ. 100 pA even with the rated load voltage of 400 V (AQW214).

6. Low-level thermal electromotive force (Approx. 1 µV)

7. Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side

8. Stable ON resistance.

9. Eliminates the need for a power supply to drive the power MOSFET

TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephones equipment
- Computer

TYPES

1. AC/DC type

Output rating*		Part No.				Packing quantity	
		Through hole terminal	Surface-mount terminal				
Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
60V	500 mA	AQW212	AQW212A	AQW212AX	AQW212AZ	1 tube contains 40 pcs. 1 batch contains 400 pcs.	1,000 pcs.
100 V	300 mA	AQW215	AQW215A	AQW215AX	AQW215AZ		
200 V	160 mA	AQW217	AQW217A	AQW217AX	AQW217AZ		
350 V	120 mA	AQW210	AQW210A	AQW210AX	AQW210AZ		
400 V	100 mA	AQW214	AQW214A	AQW214AX	AQW214AZ		
600 V	40 mA	AQW216	AQW216A	AQW216AX	AQW216AZ		

*Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. AC/DC type

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW212(A)	AQW215(A)	AQW217(A)	AQW210(A)	AQW214(A)	AQW216(A)	Remarks	
Input	LED forward current	I _F	50 mA						$f = 100 \text{ Hz}$, Duty factor = 0.1%	
	LED reverse voltage	V _R			5 V					
	Peak forward current	I _{FP}			1 A					
	Power dissipation	P _{in}			75 mW					
Output	Load voltage (peak AC)	V _L	60 V	100 V	200 V	350 V	400 V	600 V	(): in case of using only 1 channel A connection: Peak AC, DC	
	Continuous load current	I _L	0.50 A (0.60A)	0.30 A (0.35 A)	0.16 A (0.2 A)	0.12 A (0.14 A)	0.10 A (0.13 A)	0.04 A (0.05 A)		
	Peak load current	I _{peak}	1.0 A	0.9 A	0.48 A	0.36 A	0.3 A	0.12 A		
	Power dissipation	P _{out}			800 mW					
Total power dissipation		P _T			850 mW					
I/O isolation voltage		V _{iso}			1,500 V AC		Between input and output/ between contact sets			
Temperature limits	Operating	T _{opr}			-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures	
	Storage	T _{stg}			-40°C to +100°C -40°F to +212°F					


GU PhotoMOS (AQW21○)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW212(A)	AQW215(A)	AQW217(A)	AQW210(A)	AQW214(A)	AQW216(A)	Condition	
Input	LED operate current	I_{Fon}			0.9 mA				$I_L = \text{Max.}$	
					3 mA					
Input	LED turn off current	I_{Foff}			0.4 mA				$I_L = \text{Max.}$	
					0.8 mA					
Input	LED dropout voltage	V_F			1.25 V (1.14 V at $I_F = 5 \text{ mA}$)				$I_F = 50 \text{ mA}$	
					1.5 V					
Output	On resistance	R_{on}	Typical	0.83 Ω	2.3 Ω	11 Ω	23 Ω	30 Ω	70 Ω	$I_F = 5 \text{ mA}$
			Maximum	2.5 Ω	4.0 Ω	15 Ω	35 Ω	50 Ω	120 Ω	$I_L = \text{Max.}$ Within 1 son time
Output	Off state leakage current	I_{Leak}	Maximum	1 μA						$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$
	Turn on time*	T_{on}	Typical	0.65 ms	0.60 ms	0.25 ms	0.25 ms	0.31 ms	0.28 ms	$I_F = 5 \text{ mA}$
Transfer characteristics			Maximum	2 ms	2 ms	1.0 ms	0.5 ms	0.5 ms	0.5 ms	$I_L = \text{Max.}$
Transfer characteristics	Turn off time*	T_{off}	Typical	0.08 ms	0.06 ms	0.05 ms	0.05 ms	0.05 ms	0.04 ms	$I_F = 5 \text{ mA}$
			Maximum	0.2 ms						$I_L = \text{Max.}$
Transfer characteristics	I/O capacitance	C_{iso}	Typical	0.8 pF						$f = 1 \text{ MHz}$
			Maximum	1.5 pF						$V_B = 0 \text{ V}$
Transfer characteristics	Initial I/C isolation resistance	R_{iso}	Minimum	1,000 MΩ						500 V DC

Note: Recommendable LED forward current $I_F = 5 \text{ mA}$.


*Turn on/Turn off time

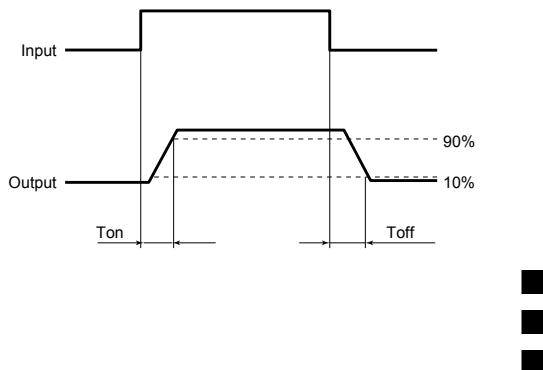

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

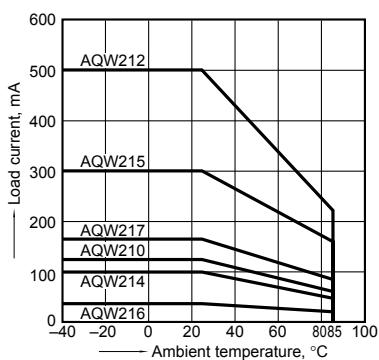


2.-1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

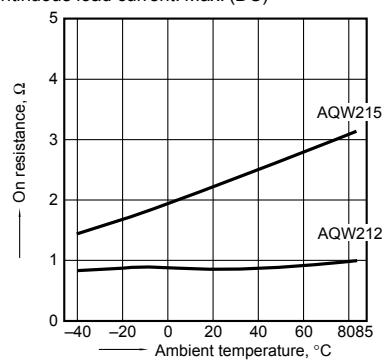

2.-2) On resistance vs. ambient temperature characteristics


Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

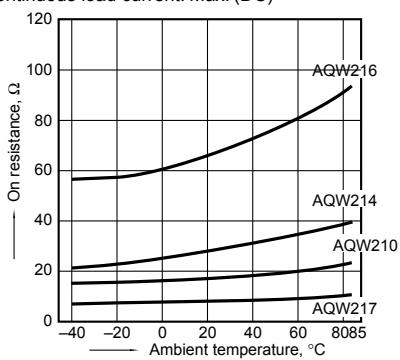

GU PhotoMOS (AQW21O)


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

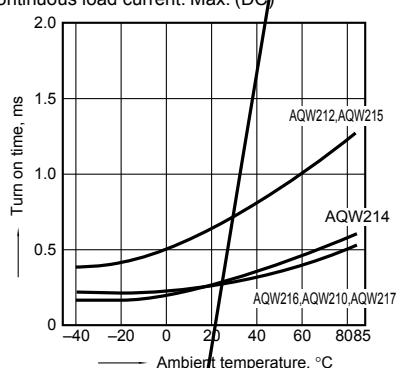


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

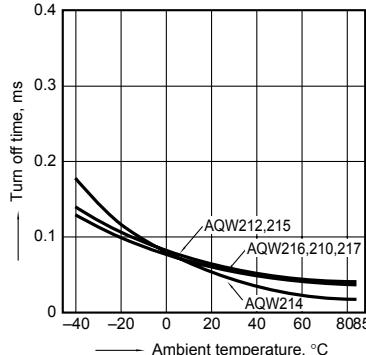


5. LED operate current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC); Continuous load current: Max. (DC)

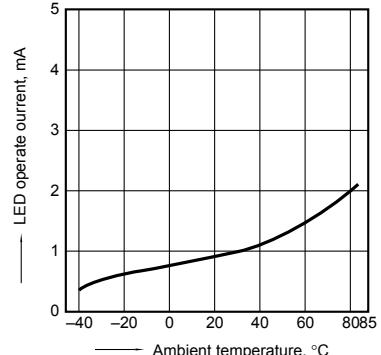


6. LED turn off current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC); Continuous load current: Max. (DC)

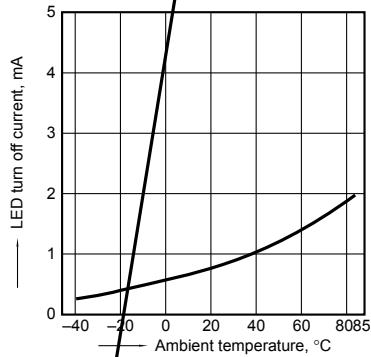


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types; LED current: 5 to 50 mA

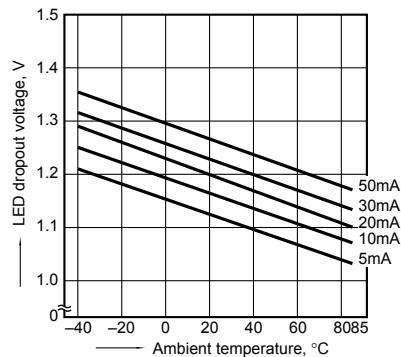


8.-1(1) Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

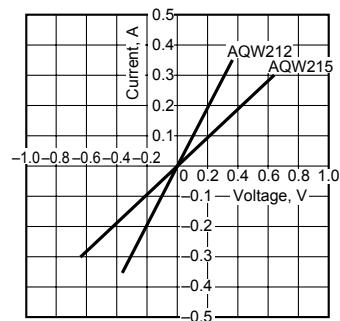


8.-2(2) Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

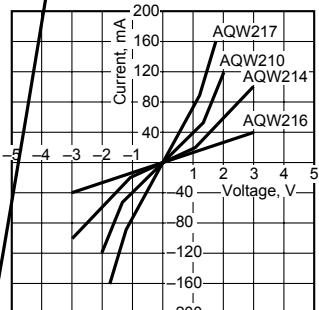


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

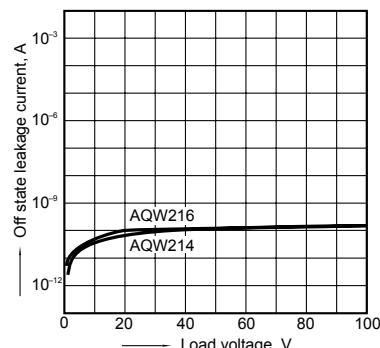

10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

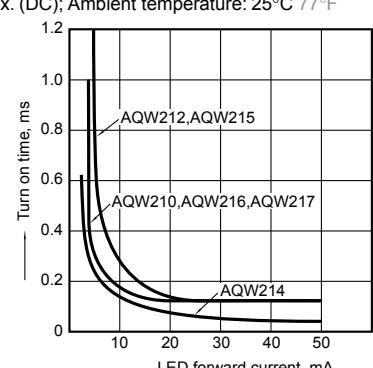

11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz; Ambient temperature: 25