

Protection class up to IP 65 for VERSION I when using the sealing kit.

VERSION I

Without battery compartment.

VERSION II*

With battery compartment for 1 x 9 V flat battery (PP3).



VERSION III*

With battery compartment for 4 x 1.5 V mignon cells (AA) or 2 x 9 V flat batteries (PP3).

VERSION IV*

With battery compartment for 1 x 9 V flat battery (PP3) or 2 x 1.5 V mignon-cells (AA)

Battery compartment are accessible from the outside.

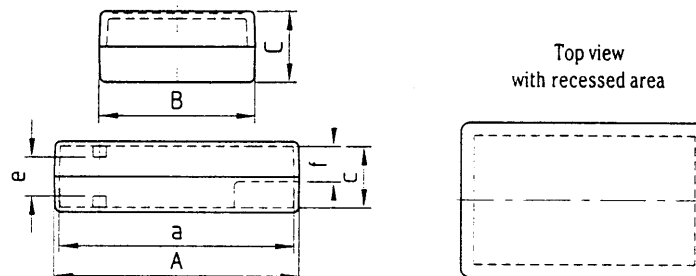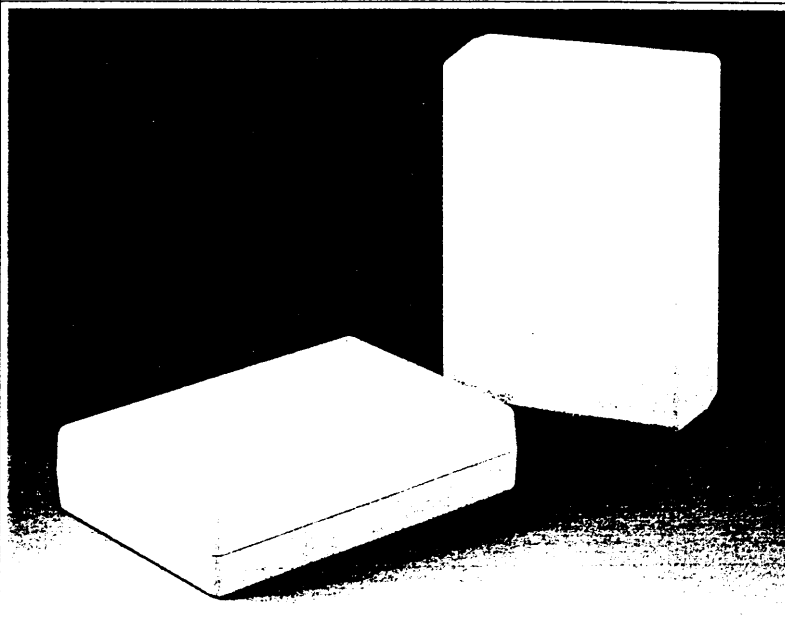

DESIGN

Two-part case with closed front and rear.

A high degree of rigidity and tight fitting due to tongue-and groove joint.

Some versions are available with recessed area.

MATERIAL

High-impact polystyrene (UL 94 HB). Also available in other materials on request.

STANDARD COLOUR

Off-white, RAL 9002.

SPECIAL COLOURS

Any desired colour.

Part No.	Shell-type-case	Outside dim.			Inside dimensions						Spacings						Dim. (LxWxH) recessed area	Version						
		A	B	C	a	b	c	d	e	f	g	h	k	l	m	n			o	t				
A 94 04 331	G 85	85	45	22	79	39	17	22	8	-	17	-	50	29	-	-	-	-	-	-	-	-	I	
A 94 04 341		85	45	33	78	38	29	22	20	-	17	-	50	29	-	-	-	-	-	-	-	-	I	
A 94 04 441		85	45	45	78	38	40	22	31	-	17	-	50	29	-	-	-	-	-	-	-	-	I	
A 94 06 331	G 110	114	72	33	104	62	27	43	17	-	21	-	76	32	30	30	30	-	-	-	-	-	I	
A 94 06 351 ☆		114	72	33,5	104	62	27	43	17	-	21	-	76	32	30	30	30	-	102 x 60 x 1	-	-	-	I	
A 94 06 341		114	72	45	104	62	39	43	29	-	21	-	76	32	30	30	30	-	-	-	-	-	I	
A 94 06 441		114	72	57	104	62	51	43	41	-	21	-	76	32	30	30	30	-	-	-	-	-	I	
A 94 06 332		114	72	33	104	62	27	43	17	8	21	46	-	32	30	30	-	30	-	-	-	-	II	
A 94 06 352 ☆		114	72	33,5	104	62	27	43	17	8	21	46	-	32	30	30	-	30	-	102 x 60 x 1	-	-	II	
A 94 06 342		114	72	45	104	62	39	43	29	20	21	46	-	32	30	30	-	30	-	-	-	-	II	
A 94 08 331		G 155	158	95	33	149	85	27	63	16	-	20	60	120	50	38	42	42	-	-	-	-	-	I
A 94 08 351 ☆			158	95	33,5	149	85	27	63	16	-	20	60	120	50	38	42	42	-	144,5 x 81,5 x 1	-	-	-	I
A 94 08 341			158	95	45	149	85	39	63	28	-	20	60	120	50	38	42	42	-	-	-	-	-	I
A 94 08 441	158		95	57	149	85	51	63	40	-	21	60	120	50	38	42	42	-	-	-	-	-	I	
A 94 08 337	158		95	33	149	85	27	63	16	7	20	60	-	50	38	42	-	61	-	-	-	-	III	
A 94 08 357 ☆	158		95	33,5	149	85	27	63	16	7	20	60	-	50	38	42	-	61	144,5 x 81,5 x 1	-	-	-	III	
A 94 08 347	158		95	45	149	85	39	63	28	19	20	60	-	50	38	42	-	61	-	-	-	-	III	
A 94 08 335	158		95	33	149	85	27	63	16	7	20	60	90	50	38	42	-	31	-	-	-	-	IV	
A 94 08 355 ☆	158		95	33,5	149	85	27	63	16	7	20	60	90	50	38	42	-	31	144,5 x 81,5 x 1	-	-	-	IV	
A 94 08 345	158		95	45	149	85	39	63	28	19	20	60	90	50	38	42	-	31	-	-	-	-	IV	
A 94 13 331	G 190	190	138	45	182	130	39	101	28	-	19	53	154	89	34	42	42	-	-	-	-	-	I	
A 94 13 351 ☆		190	138	45,5	182	130	39	101	28	-	19	53	154	89	34	42	42	-	172 x 120 x 1	-	-	-	I	
A 94 13 341		190	138	68	180	128	62	101	51	-	19	53	154	89	34	42	42	-	-	-	-	-	I	
A 94 13 441		190	138	91	180	128	85	100	74	-	19	53	154	89	34	42	42	-	-	-	-	-	I	
A 94 13 337		190	138	45	182	130	39	101	28	19	19	53	154	89	34	42	42	61	-	-	-	-	III	
A 94 13 357 ☆		190	138	45,5	182	130	39	101	28	19	19	53	154	89	34	42	42	61	172 x 120 x 1	-	-	-	III	
A 94 13 347		190	138	68	180	128	62	101	51	42	19	53	154	89	34	42	42	61	-	-	-	-	III	

* References: The battery contact for version II and contact or clips for version IV must be separately ordered - see our main catalogue on page 131.
The AA-cell clips for version III are already supplied with the case.

The drawing with the internal dimensions and spacings of top and base see in our main catalogue on page 129