
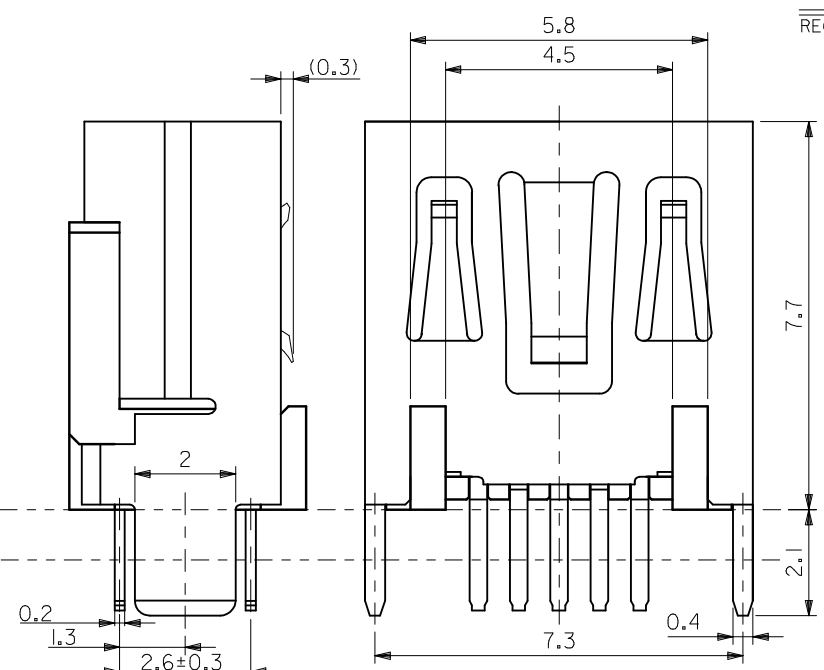
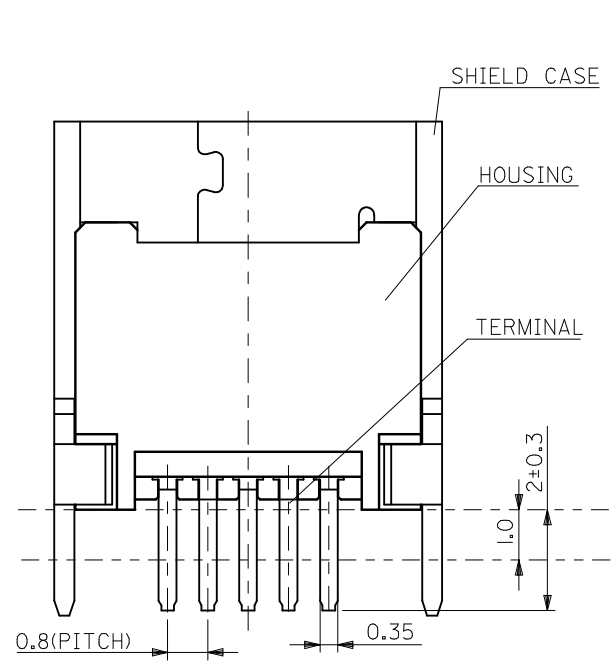


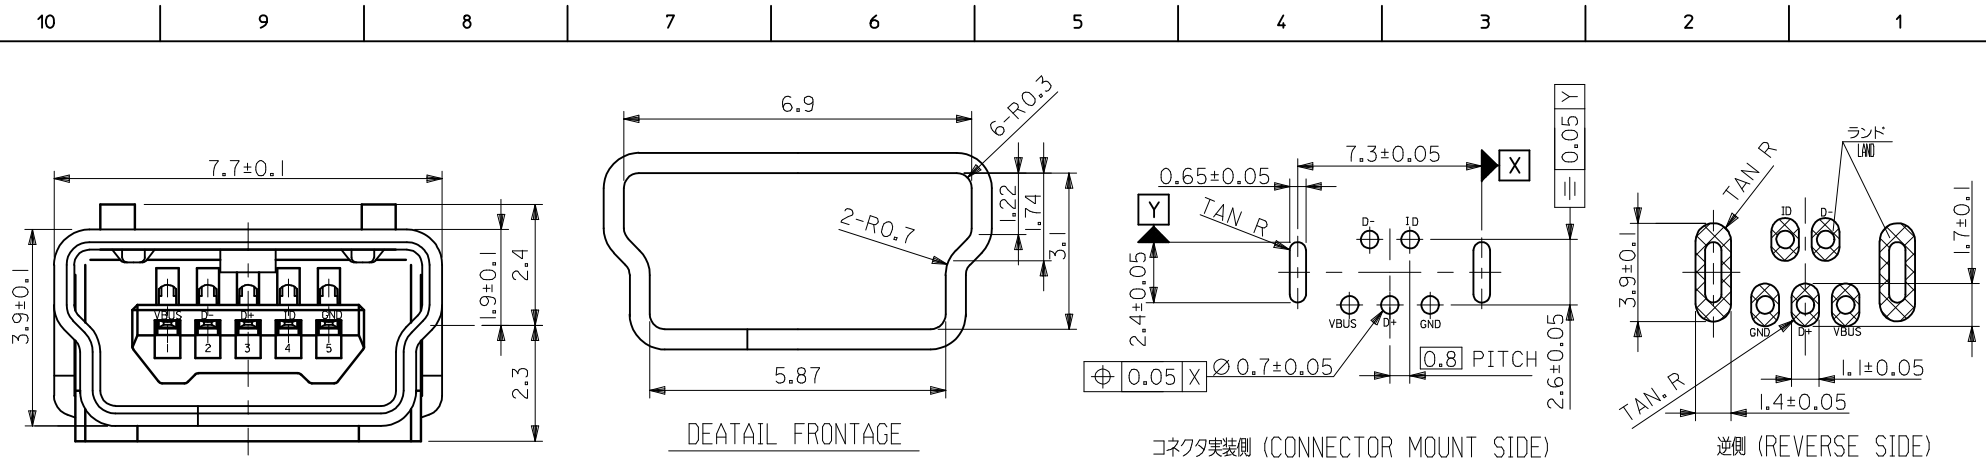

推奨基板寸法
RECOMMENDED P.C.B. PATTERN LAYOUT

- 注記
NOTES
- 材質
MATERIAL
ハウジング: ポリアミド, 黒色, UL94V-0
HOUSING: POLYAMIDE, BLACK, UL94V-0
ターミナル: 銅合金 (t=0.2)
TERMINAL: COPPER ALLOY (t=0.2)
シールド ケース: 銅合金 (t=0.4)
SHIELD CASE: COPPER ALLOY (t=0.4)
 - メッキ仕様
PLATING
ターミナル
TERMINAL
接点部: 金メッキ
CONTACT AREA: GOLD
半田付け部: 錫メッキ
SOLDER TAIL AREA: TIN
下地部: ニッケルメッキ
UNDER PLATING: NICKEL
シールド ケース: 錫メッキ
SHIELD CASE: TIN
下地部: ニッケルメッキ
UNDER PLATING: NICKEL

REVISED EC NO.: J2009-1533 DRAWN: SATO CHKD: MATSUMOTO APPR: NUKITA A	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± 0.2	DRAWN BY MNABEI	DATE '04/08/30	TITLE USB SERIES MINI-B STRAIGHT TYPE 2 REC ASSY -LEAD FREE-		
		10 OVER 30 UNDER	± 0.25	CHECKED BY KTOJO	DATE '04/08/30			
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE '04/08/30	 MOLEX INCORPORATED		
		ANGULAR ±3 °		MATERIAL NO. SEE TABLE			DOCUMENT NO. SD-500075-008	
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				