NUMBER 178136

3rd ANGLE PROJECTION

METRIC

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST

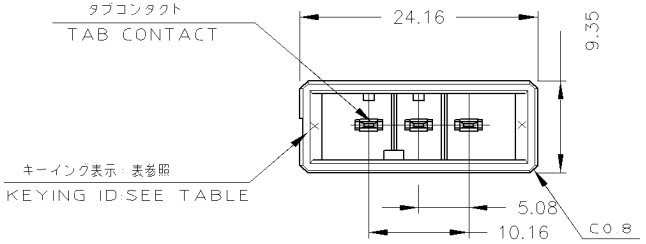

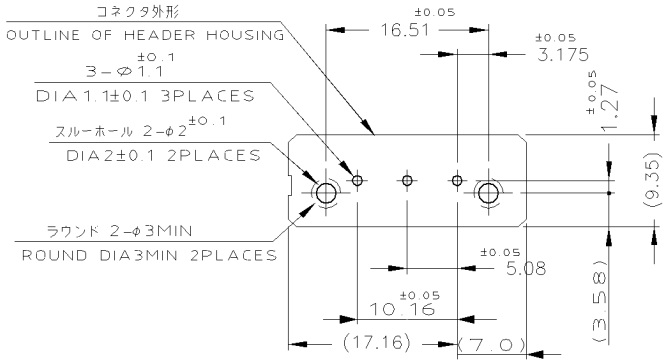

推奨基板取付け穴寸法

PC 基板厚：1.6±0.1
（非累積公差）
（コネクタ搭載面）

RECOMEND PC BOARD HOLE PATTERN

PC BOARD THICKNESS:1.6±0.1
(NOT ACCUMULATE TOLERANCE)
(CONNECTOR MOUNT SIDE)

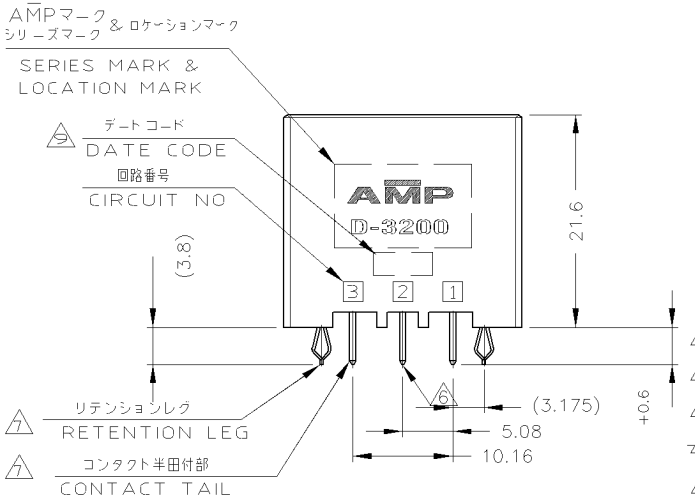

1. MATERIAL:HOUSING:GLASS FILED THERMO PLASTIC,POLYESTER(94V-0),COLOR:BLACK
CONTACT:COPPER ALLOY
RETENTION LEG:COPPER ALLOY

△2 FINISH(CONTACT AREA):0.38μmMIN GOLD PLATING OVER Ni PLATING

△3 FINISH(CONTACT AREA):0.76μmMIN GOLD PLATING OVER Ni PLATING

△4 FINISH(CONTACT AREA):2.0 μmMIN TIN PLATED OVER NICKEL

~~△5 FINISH(RETENTION LEG): TIN-LEAD PLATED (CONTACT TAIL) OVER NICKEL~~

⑥ IN CASE OF 5-178136-2,6-178136-2, TAB CONT OF NO.2 IS PULLED OUT.

⑦ FINISH(RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

8. THE SHAPE,SIZE AND POSITION OFTHE CHARACTER SHOW THE OUTLINE THEY DON'T SHOW DETAILS

⑨ THE DATE CODE SHOW PRODUCTION LOT BY NUMBER. THE NUMBER MAKE UP THE NUMBER OF FOUR COLUMS OR FIVE COLUMS. (INCLUDE THE ALPHABET)

1. 材料：ハウジング：ガラス入り熱可塑性
ポリエステル樹脂（94V−0），色：黒
コンタクト：銅合金
リテンションレグ：銅合金

△2 めっき：コンタクト 全面Ni下地
接触部：0.38μm MIN金めっき

△3 めっき：コンタクト 全面Ni下地
接触部：0.76μm MIN金めっき

△4 めっき：コンタクト 全面Ni下地
接触部：2.0 μm MINスズめっき

~~△5 めっき：リテンションレグとコンタクト半田付部 ニッケル下地の上に半田めっき~~

⑥ 5-178136-2,6-178136-2については、2番ピンは無しとする。

△7 めっき：
リテンションレグとコンタクト半田付部 ：ニッケル下地の上にスズめっき

8. 文字の形状、大きさ、および位置については、大略を示すものであり、詳細を示すものではありません。

⑨ 4桁の数字及びアルファベットを含む5桁の数字により製造ロットを示す。

	KEYING LOCATION	KEYING	FINISH	製品番号 PART NO.
		Z	⑦ △4	3-178136-5
			⑦ △2	7-178136-2
		Y	⑦ △4	2-178136-5
			⑦ △3	2-178136-3
			⑦ △2 ⑥	6-178136-2
			⑦ △2	2-178136-2
		X	⑦ △4	1-178136-5
			⑦ △3	1-178136-3
			⑦ △2 ⑥	5-178136-2
			⑦ △2	1-178136-2

TE Connectivity

LTR	REVISION RECORD	DR	CHK	DATE
H8	REVISED	H.U	N.Y	21DEC 11
H7	REVISED	H.U	N.Y	29NOV 11
H6	REVISED PER ECO-11-005030	RK	HMR	24MAR 11

WIRE RANGE mm²(AWG -) | INSULATION DIA - mmφ

MATERIAL SEE NOTE 注記参照 | FINISH SEE NOTE 注記参照

DR. 19 APR 94 N.Matsubara | DE. 19 APR 94 N.Matsubara

CHK. 20 APR 94 S.MANABE | APP. 20 APR 94 S.MANABE

NAME DYNAMIC D-3200 5.08PITCH(V) 3 POS.HDR CONN.ASS'Y

一般公差 (GENERAL TOLERANCE)
10以下 ±0.3
10を超え 30以下 ±0.4
30を超え 100以下 ±0.45
角度 ±3°

SIZE A3 | LOC J | NUMBER C-178136

SCALE 2-1 | REV. H8 | SHEET 1 OF 1

(CUSTOMER DRAWING) 顧客用図面