



LOC	DIST	REVISIONS					
H	—	P	LTR	DESCRIPTION	DATE	OWN	APVD
			G	REVISED PER ECO-13-010456	25JUN2013	SY	FY

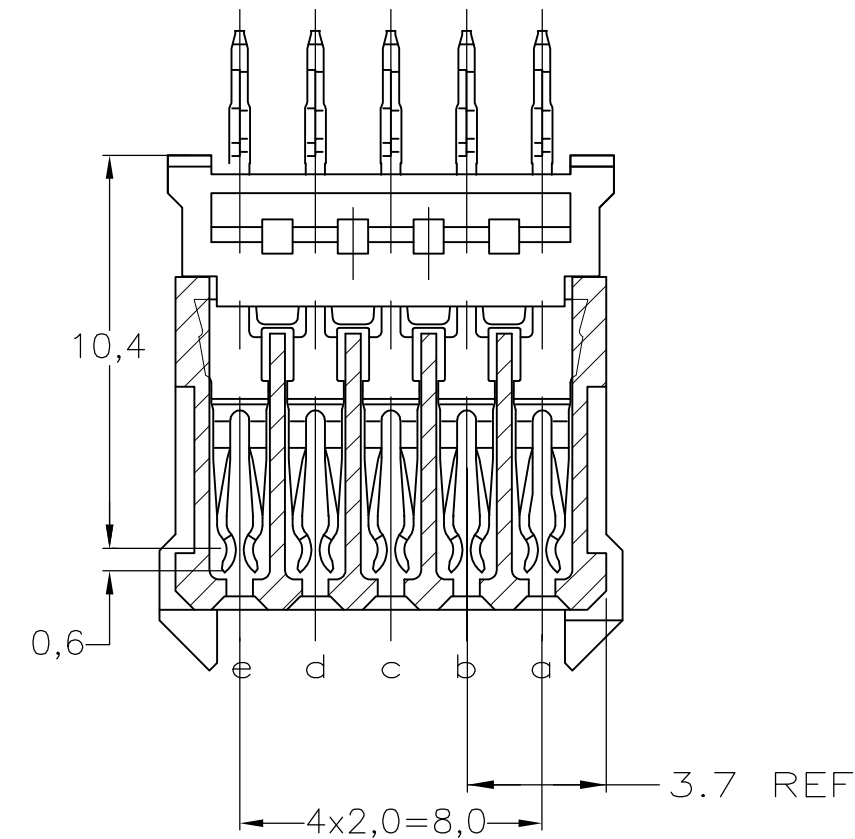

Technical drawing of a rectangular plate with dimensions and a bolt pattern. The drawing shows a side view of the plate with a central vertical slot and four bolts. The dimensions are as follows:

- Overall height: 11.8
- Height of the central slot: 11.4
- Width of the plate: 12.0
- Distance from the left edge to the center of the slot: 8.8
- Distance from the right edge to the center of the slot: 3.3
- Distance between the centers of the four bolts: $4 \times 2.0 = 8.0$

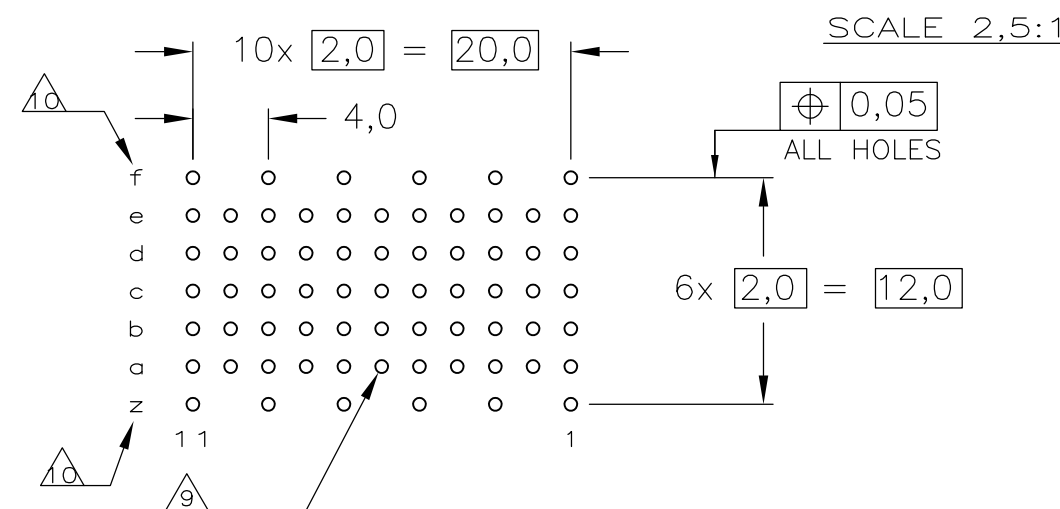

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE APPLICATION SPECIFICATION

		3-5106775-0
		1-5106775-9
		5106775-9
		5106775-4
		5106775-1
FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 13AUG2004		 TE Connectivity	
		CHK B.MOOIJ 27OCT2004			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME Z-PACK 2mm HM TYPE C 55 POS. VERTICAL FEMALE CONNECTOR ASSEMBLY	
mm		APVD B.MOOIJ 27OCT2004			
		PRODUCT SPEC			
		108-19082			
		APPLICATION SPEC			
		114-19029		SIZE A2	
MATERIAL		FINISH		CAGE CODE	
-		-		DRAWING NO	
		WEIGHT		00779	
		CUSTOMER DRAWING		C-5106775	
				RESTRICTED TO	
				-	
				SCALE	
				5:1	
				SHEET	
				1 of 1	
				REV	
				G	

- ① MATERIAL CONTACT: PHOSPHORBRONZE
MATERIAL HOUSING: GLASSFILLED POLYESTER
UL-RATING 94V0 (GRAY).
- ② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1.27μm NICKEL MIN. AND ACTION PIN: 0.5μm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- ③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- ④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- ⑤ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- ⑥ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- ⑦ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
- ⑧ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
- ⑨ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (55 HOLES).
- ⑩ HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF
GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED)
- ⑪ 0.76μm MIN. GOLD PLATING AT MATING SURFACE

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT